

Canon imageRUNNER ADVANCE C75900KG/C7500 Series 2600 model

Security Target

Version 1.08 2017/03/21

Canon Inc.

Significant portions of this document were excerpted from IEEE Std 2600.1 and 2600.2, -2009 - copyright IEEE 2009 and reproduced with permission from IEEE. , All rights reserved. An use beyond what is permitted, please contact <u>mailto:stds-ipr@ieee.org</u>.

This document is a translation of the evaluated and certified security target written in Japanese.



Table of Contents

1	ST	introduction	. 4
	1.1	ST reference	. 4
	1.2	TOE reference	. 4
	1.3	TOE overview	. 4
	1.4	Terms and Abbreviations	. 5
	1.5	TOE description	. 6
	1.6	Scope of the TOE	. 8
	1.6	5.1 Physical Scope of the TOE	. 8
	1.6	5.2 Logical Scope of the TOE	10
	1.7	Users of the TOE	12
	1.8	Assets	12
	1.8	B.1 User Data	12
	1.8	B.2 TSF Data	12
	1.8	B.3 Functions	13
2	Co	nformance claims	14
	2.1	CC Conformance claim	14
	2.2	PP claim, Package claim	14
	2.3	SFR Packages	14
	2.3	SFR Packages reference	14
	2.3	S.2 SFR Package functions	15
	2.3	S.3 SFR Package attributes	16
	2.4	PP Conformance rationale	
3	Sec	curity Problem Definition	19
	3.1	Notational conventions	
	3.2	Threats agents	19
	3.3	Threats to TOE Assets	20
	3.4	Organizational Security Policies for the TOE	
	3.5	Assumptions	
4	Sec	curity Objectives	
	4.1	Security Objectives for the TOE	
	4.2	Security Objectives for the IT environment	
	4.3	Security Objectives for the non-IT environment	
	4.4	Security Objectives rationale	
5		tended components definition (APE_ECD)	
	5.1	FPT_FDI_EXP Restricted forwarding of data to external interfaces	
6		curity requirements	
	6.1	Security functional requirements	
	6.1		
	6.1		
	6.1		
	6.1	.4 Forward Received Jobs Function	36

Copyright CANON INC 2016



	6.1.5	5 HDD Data Erase Function	36
	6.1.6	6 HDD Data Encryption Function	37
	6.1.7	7 LAN Data Protection Function	37
	6.1.8	8 Self-Test Function	38
	6.1.9	9 Audit Log Function	39
	6.1.1	10 Management Function	41
	6.2	Security Assurance Requirements	45
	6.3	Security functional requirements rationale	46
	6.3.1	The completeness of security requirements	46
	6.3.2	2 The sufficiency of security requirements	47
	6.3.3	3 The dependencies of security requirements	49
	6.4	Security assurance requirements rationale	51
7	TOE	Summary specification	52
	7.1	User Authentication Function	52
	7.2	Function Use Restriction Function	52
	7.3 .	Job Output Restriction Functions	53
	7.3.1	l Job Cancel	53
	7.3.2		
	7.3.3	3 Temporarily Stored FAX TX Jobs	55
	7.4	Forward Received Jobs Function	56
	7.5	HDD Data Erase Function	56
	7.6	HDD Data Encryption Function	57
	7.6.1	1 Encryption/Decryption Function	57
	7.6.2	2 Cryptographic Key Management Function	57
	7.7	LAN Data Protection Function	58
	7.7.1	I IP Packet Encryption Function	58
	7.7.2		
		Self-Test Function	
	7.9	Audit Log Function	58
	7.10	Management Functions	59
	7.10		
	7.10	.2 Device Management Function	60

Trademark Notice

- Canon, the Canon logo, imageRUNNER, imageRUNNER ADVANCE, imagePRESS, MEAP, and the MEAP logo are registered trademarks or trademarks of Canon Inc.
- Microsoft, Internet Explorer, and Active Directory are registered trademarks or trademarks of Microsoft Corporation in the US and other countries.
- eDirectory is a trademark of Novell, Inc. in the US.
- All names of companies and products contained herein are trademarks or registered trademarks of the respective companies.



1 ST introduction

1.1 ST reference

This section provides the Security Target (ST) identification information.

ST name: Canon imageRUNNER ADVANCE C75900KG/C7500 Series 2600 model Security Target

Version:	1.08
Issued by:	Canon Inc.
Date of Issue:	2017/03/21

1.2 TOE reference

This section provides the TOE identification information.

TOE name: Canon imageRUNNER ADVANCE C75900KG/C7500 Series 2600 model

Version: 1.0

The TOE is comprised of the following software and hardware.

iR-ADV Security Kit-Q1 for IEEE 2600 Common Criteria Certification Ver 1.00 Canon Super G3 FAX Board-AS Canon imageRUNNER ADVANCE C75900KG/C7500 Series Canon Security Chip V2.10

Note that the sales names of Fax Boards are different depending on the region as shown below. Procurers needs to confirm and purchase appropriate fax board:

Japan:	Super G3 FAX Board-AS1
U.S. and Korea:	Super G3 FAX Board-AS2
Other regions:	Super G3 FAX Board-AS1

1.3 TOE overview

The TOE is a digital multi-function peripheral (MFP) known as < Canon imageRUNNER ADVANCE C75900KG/C7500 Series 2600 model >. This is a version of the standard model < Canon imageRUNNER ADVANCE C75900KG/C7500 Series > which by installing/attaching the following 2 products and making the proper settings, makes up the < Canon imageRUNNER ADVANCE C75900KG/C7500 Series 2600 model > or TOE.

- iR-ADV Security Kit-Q1 for IEEE 2600 Common Criteria Certification
- Fax Board

< iR-ADV Security Kit-Q1 for IEEE 2600 Common Criteria Certification> contains the < Canon imageRUNNER ADVANCE C75900KG/C7500 Series > control software.

Fax Board is hardware to use fax functionality.

Canon Security Chip V2.10 is embedded in < Canon imageRUNNER ADVANCE C75900KG/C7500 Series >.



< Canon imageRUNNER ADVANCE C75900KG/C7500 Series 2600 model > is capable of fully implementing the Protection Profile (PP) for Multi-Function Products indicated below, as well as the security functions required by 6 SFR Packages in the 7 SFR Packages defined in the PP, except for 2600.2-NVS, SFR Package for Hardcopy Device Nonvolatile Storage Functions, Operational Environment B. In addition, it has HDD encryption function to encrypt all the data stored in the HDD.

Protection Profile

- U.S. Government Approved Protection Profile - U.S. Government Protection Profile for Hardcopy Devices Version 1.0 (IEEE Std 2600.2TM-2009)

SFR Packages

- 2600.2-PRT, SFR Package for Hardcopy Device Print Functions, Operational Environment B
- 2600.2-SCN, SFR Package for Hardcopy Device Scan Functions, Operational Environment B
- 2600.2-CPY, SFR Package for Hardcopy Device Copy Functions, Operational Environment B
- 2600.2-FAX, SFR Package for Hardcopy Device Fax Functions, Operational Environment B
- 2600.2-DSR, SFR Package for Hardcopy Device Document Storage and Retrieval (DSR) Functions, Operational Environment B
- 2600.2-SMI, SFR Package for Hardcopy Device Shared-medium Interface Functions, Operational Environment B

1.4 Terms and Abbreviations

The following terms and abbreviations are used throughout this ST.

Terms/Abbreviations Description		
Multi-Function	A machine which incorporates the functionality of multiple devices in one, such as	
Peripheral (MFP)	copier, fax, printer, and Universal Send, and containing a large capacity HDD to	
()	facilitate such capabilities.	
Control software	Software that runs on the hardware of the device, and controls security functions.	
Control panel	One of the hardware elements of the MFP, consisting of a touch panel and operation	
-	keys, which provides the interface for operation of the MFP.	
Remote UI	An interface that provides access to the MFP from a Web browser via the LAN, to	
	allow operations such as acquiring operating status, performing job operations or	
	BOX operations, and making various settings.	
HDD	Hard disk drive mounted on the MFP, where control software and assets are stored.	
I-Fax	Short for Internet Fax. Uses the Internet instead of telephone line to receive and	
	send faxes.	
Image file	Image data generated within the MFP, from operations such as scan, print, and	
	receive.	
Temporary image file	Image files generated during jobs such as Copy and Print, which are needed only	
	until the job completes.	
Roles	Used by access restriction functions to restrict the functions that each user can use.	
	One role is associated with each user. In addition to pre-defined default roles, default	
	roles may be modified to create custom roles. The default roles are: Administrator,	
	Power User, General User, and Limited User.	
	A user assigned the Administrator role is capable of using management operations	
Administrator	(administrative privileges).	
Administrator	User assigned the Administrator role and has administrative privileges. Equivalent to U.ADMINISTRATOR defined in the PP.	
Job		
100	When a user uses the functions of the TOE to execute an operation on a document, a Job is the intended document data combined with the user instructions for	
	processing those data.	
	processing most uata.	



Terms/Abbreviations	Description
	The operations that can be performed on a document are: Scan, Print, Copy, Fax
	TX, Save, and Delete. The processing phases for a Job issued by the user are:
	generation, execution, and completion.
Document data	User data processed within the MFP, consisting of image files and print setting.
Memory RX	Allows data received by fax/I-fax to be stored in the Memory RX Inbox for later
(Reception)	processing.
Box	Collective name for Mail Boxes, Fax Inboxes, or the Memory RX Inbox wherein
	data from operations such as scan, print, and received faxes are stored in the MFP.
	*Use of Fax Inboxes is not included in this TOE.
Mail Box	Whether a general user feeds data to the MFP directly, or specifies a document for
	printing from a PC, data can be stored here to be printed later.
Memory RX Inbox	When memory reception is set, documents received by fax/I-fax are stored in the
	Memory RX Inbox. Stored documents can be printed or sent later.
Mail server	Server that facilitates I-fax transmission or email transmission of document data in
	the MFP.
User authentication	Server that maintains user information such as user ID and password, for user
server	authentication over the network.
Firewall	Device or system designed to protect the internal LAN against threats from the
	Internet.
Time server	Server that uses the Network Time Protocol to provide the accurate time over the
	Internet.
[Print]	A button on the control panel that activates the function to operate on-hold print jobs.
[Copy]	A button on the control panel that activates the Copy function.
[Fax]	A button on the control panel that activates the Fax function.
[Scan]	Indicates the [Scan and Store] and [Scan and Send] buttons on the control panel,
	that allow the user to scan paper documents to be stored as files, or scanned
	documents to be sent to some location such as to an email address or a shared folder
	in a PC, respectively.
[Fax/I-Fax Inbox]	A button on the control panel that activates the Fax/I-Fax Inbox function.
	There are two types of Fax/I-Fax Inbox: the Memory RX Inbox and Confidential
	Fax Inbox. Both inboxes can be used to store files received by Fax and I-Fax.
[Access Stored Files]	A button on the control panel that allows the user to access files stored in a Mail
	Box/Inbox.
Remote UI [Access	A button on the remote UI that allows the user to access files stored in a Mail
Received/Stored Files]	Box/Inbox.

1.5 TOE description

The TOE is a MFP that offers Copy, Print, Universal Send, Fax, I-Fax RX, and Mail Box capabilities. The TOE, which conforms to "U.S. Government Approved Protection Profile - U.S. Government Protection Profile for Hardcopy Devices Version 1.0 (IEEE Std 2600.2TM-2009)" is designed to operate in an environment such as the one shown below (as excerpted from "IEEE Standard Protection Profile for Hardcopy Devices in IEEE Std 2600TM-2008 Operational Environment B" clause "1.1 Scope").

This standard is for a Protection Profile for Hardcopy Devices in a commercial information processing environment in which a moderate level of document security, network security, and security assurance are required. Typically, the day-to-day proprietary and nonproprietary information needed to operate an enterprise will be handled by this environment. This environment will be known as "Operational Environment B."

Figure 1 shows the environment for which the TOE or < Canon imageRUNNER ADVANCE C75900KG/C7500 Series 2600 model > has been designed, with options included. Since not all of these features may be required, the actual operational environment is expected to differ than what is shown here.



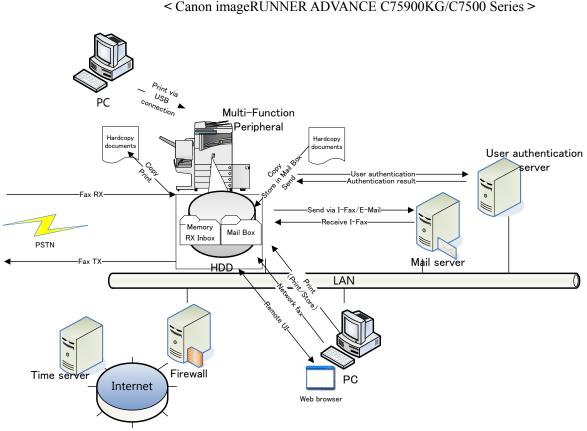


 Figure 1
 The assumed operational environment of the MFP

 < Canon imageRUNNER ADVANCE C75900KG/C7500 Series >

In Figure 1, the MFP is connected by an internal LAN, to all of the other major components, namely the Mail Server, User Authentication Server, PC, and Firewall. Furthermore, the internal LAN is protected by Firewall from threats from the Internet. To send (via I-Fax or email) a previously scanned document or when receiving a document by I-Fax for example, the MFP connects to the Mail Server. By using a PC with a Web browser¹, functions such as printing, storing, or I-Fax can also be executed remotely. However, in order to print from a PC, the appropriate printer driver needs to be installed in the PC. Alternatively, a USB cable could be used to connect the PC directly, and print or store document data from the PC. In this case, some configuration is required initially, in order to protect against data being taken out of the MFP and stored in a PC or USB device.

The TOE also obtains accurate time from the Time server for time synchronization, and supports user authentication through the External Authentication Server. The TOE has HDD encryption function to encrypt all the data to be stored in the internal HDD of the TOE.

The functions available to the MFP in such an environment are listed below:

- Copy function

Produces duplicates of the hardcopy document by scanning and printing.

- Print function

Produces a hardcopy document from its electronic form (contained in the MFP or sent from a PC).

¹ This evaluation was performed using Microsoft Internet Explorer 11 as the Web browser.



- I-Fax RX (receive) function

Uses the Internet to receive faxes. Data received by I-fax is not printed immediately; rather it is stored in Memory RX Inbox for processing at a later time. Stored documents can be printed, sent or deleted later.

- Fax RX (receive) function

Uses a fax line to receive faxes. Data received by fax is not printed immediately; rather it is stored in Memory RX Inbox for processing at a later time. Stored documents can be printed, sent or deleted later.

- Fax TX (send) function

Scanned document data or electronic documents stored in Mail Box/Memory RX Inbox can be retrieved for transmission by fax.

- Universal Send function

Scanned document data or electronic documents stored in Mail Box/Memory RX Inbox can be transmitted by email or I-fax, or sent to a shared folder on a PC, in TIFF or PDF file format.

- Mail Box function

Refers to the storage of image files into a Mail Box or in Memory RX Inbox, or to functions that utilize the Mail Box/inbox functionality.

- Image files Stored in Mail Box

Scanned document data or electronic data specified for storage from a PC, are stored in a Mail Box.

- Functions that utilize Mail Box functionality

The following functions can be executed on data stored in a Mail Box.

- Edit (document/print setting)
- Print
- Send
- Delete

1.6 Scope of the TOE

The TOE conforms to "U.S. Government Approved Protection Profile - U.S. Government Protection Profile for Hardcopy Devices Version 1.0 (IEEE Std 2600.2[™]-2009)" and is designed to meet the requirements specified therein, as described below.

The physical and logical scopes of the TOE are described below.

1.6.1 Physical Scope of the TOE

The TOE is a MFP consisting of hardware and software components. The physical scope of the TOE is illustrated in Figure 2.



E ² 2 II d d 6 ⁴	af the TOE
Figure 2 Hardware and software components	of the IOE

Control Software	
	(TOE Software)
	Canon imageRUNNER ADVANCE
Fax board	C75900KG/C7500 Series
(TOE: Hardware)	MFP Hardware
	(TOE: Hardware)

In Figure 2, "Control Software" refers to the < iR-ADV Security Kit-Q1 for IEEE 2600 Common Criteria Certification>.

Note also that the "MFP Hardware" together with the < iR-ADV Security Kit-Q1 for IEEE 2600 Common Criteria Certification> make up the MFP main unit.

The TOE or < Canon imageRUNNER ADVANCE C75900KG/C7500 Series 2600 model > consists of the MFP main unit combined with the Fax Board.

< Canon imageRUNNER ADVANCE C75900KG/C7500 Series >, or the hardware making up the TOE, refers to the following product lineup.

Table 2 — Line of Products

ł	Products
i	R-ADV C75980KG/C75970KG/C75965KG
i	R-ADV C7580/C7580i
i	R-ADV C7570/C7570i
i	R-ADV C7565/C7565i

The Fax Board composing the TOE is called differently as follows, depending on the sales region. By procuring appropriate fax board and combining with the TOE, the Fax Board is identified and makes up the TOE.

Japan:	Super G3 FAX Board-AS1
U.S and Korea:	Super G3 FAX Board-AS2
Other regions:	Super G3 FAX Board-AS1

The documentation for the TOE are listed below.

(English Name)

- iR-ADV Security Kit-Q1 for IEEE 2600 Common Criteria Certification Administrator Guide [FT6-1848 (000)]
- Before Using the iR-ADV Security Kit-Q1 for IEEE 2600 Common Criteria Certification [FT6-1849 (000)]
- imageRUNNER ADVANCE C7500 Series 2600 model User's Guide CD (USE Version) [FT6-1850 (000)]
- imageRUNNER ADVANCE C7500 Series 2600 model User's Guide CD (APE Version) [FT6-1851 (000)]

(Japanese Name)

- iR-ADV Security Kit-Q1 for IEEE 2600 Administrator Guide [FT6-1845 (000)]
- Before Using the iR-ADV Security Kit-Q1 for IEEE 2600 [FT6-1846 (000)]
- imageRUNNER ADVANCE C7500 Series 2600 model User's Guide CD [FT6-1847 (000)]



1.6.2 Logical Scope of the TOE

The logical scope of the TOE is illustrated in Figure 3 (excluding: User, User Authentication Server, Mail Server, PC, and Time Server). In the table, the security functions of the TOE are shown in blue.

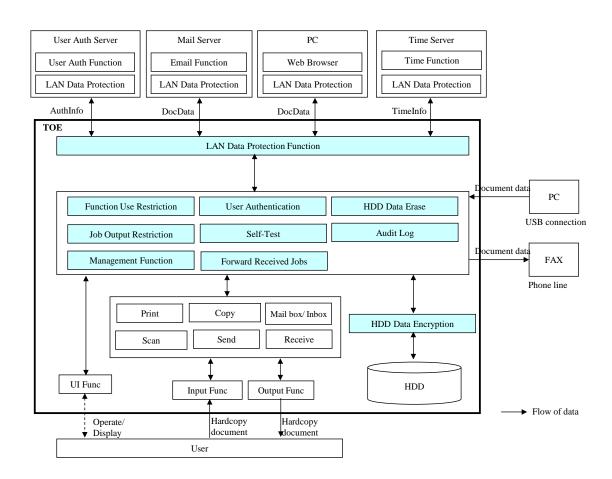


Figure 3 Functional configuration of the TOE

In addition to the capabilities described in Section 1.5, the TOE embodies the following basic functionality.

- UI Functionality

Enables the user to operate the TOE from the control panel, and the TOE to display information on the control panel.

- Output Functionality

Enables the TOE to output hardcopy documents.

- Input Functionality

Enables the TOE to input hardcopy documents.

The TOE embodies the following security functions.



- User Authentication Function

Performs authentication on the user, to prevent any unauthorized access to the TOE.

Two types of user authentication are supported: Internal Authentication wherein authentication takes place internally within the TOE, and External Authentication which uses an external user authentication server. External authentication uses Kerberos² or LDAP³ authentication.

- Function Use Restriction Function

Uses role management to restrict the functions that each authenticated user can use.

- Job Output Restriction Function

This function restricts access to print, cancel, and other job operations, to the user that executed the job.

- Forward Received Jobs Function

This function restricts the machine from forwarding received data directly to the LAN. It is provided as a countermeasure against threats arising from misuse of the fax line.

- HDD Data Erase Function

Function for erasing unnecessary data from the hard disk by overwriting the data, in order to prevent unauthorized use of previously generated image data.

- HDD Data Encryption Function

All data stored in the HDD are encrypted by the encryption chip mounted on the MFP in order to prevent unauthorized access to the HDD data by removing the HDD.

- LAN Data Protection Function

To protect LAN data from IP packet sniffing, IP packets are encrypted using IPSec.

- Self-Test Function

At the start-up, this function checks to see that the primary security functions are running properly.

- Audit Log Function

Allows auditing of user operations by generating logs which are stored in the HDD. Stored audit logs are protected and can be viewed.

The date/time recorded on the audit log is provided by the TOE. The TOE's date/time information is set by the Management Function, or is set by time synchronization when the accurate time is obtained from the Time Server.

 $^{^2}$ This evaluation was performed using Active Directory Domain Services as the authentication server software for Kerberos authentication.

³ This evaluation was performed using eDirectory 8.8 SP8 as the authentication server software for LDAP authentication.



- Management Function

Consists of user management functions such as user registration and role management, and device management functions which enable proper operation of various security functions, which can only be specified by Administrators.

1.7 Users of the TOE

The TOE has two types of users (U.USER): U.NORMAL and U.ADMINISTRATOR

	Table 5 — Users		
Designation		Definition	
U.USER		Any authorized User.	
	U.NORMAL	A User who is authorized to perform User Document Data processing	
		functions of the TOE.	
	U.ADMINISTRATOR	A User who has been specifically granted the authority to manage some	
		portion or all of the TOE and whose actions may affect the TOE security	
		policy (TSP). Administrators may possess special privileges that provide	
		capabilities to override portions of the TSP.	

Table 3 —Users

1.8 Assets

There are three types of assets: User Data, TSF Data, and Functions.

1.8.1 User Data

User Data are created by the user, and have no effect on TOE security functions. There are two types of User Data: D.DOC and D.FUNC.

Table 4 — User Data			
Designation	Definition		
D.DOC	User Document Data consists of the information contained in a user's document. This includes the original document itself in either hardcopy or electronic form, image data, or residually-stored data created by the hardcopy device while processing an original document and printed hardcopy output.		
D.FUNC	User Function Data are the information about a user's document or job to be processed by the TOE.		

1.8.2 TSF Data

TSF Data are data that have an effect on TOE security functions. There are two types of TSF Data: D.PROT and D.CONF.

Table 5 — TSF Data		
Designation	Definition	
D.PROT	TSF Protected Data are assets for which alteration by a User who is neither an	
	Administrator nor the owner of the data would have an effect on the operational security	
	of the TOE, but for which disclosure is acceptable.	
D.CONF	TSF Confidential Data are assets for which either disclosure or alteration by a User who	
	is neither an Administrator nor the owner of the data would have an effect on the	
	operational security of the TOE.	

A list of the TSF Data used in this TOE is given in Table 6.



r	Table 6 — List of TSF data			
Туре	TSF Data	Description	Stored in	
D.PROT	User name	User identification information used by the user identification and authentication function.	HDD	
	Role	Used by access restriction functions to restrict the functions that each user can use.	HDD	
	Lockout policy settings	Settings for the lockout function, such as number of attempts before lockout and the lockout time.	HDD	
	Password policy settings	Policy for the password for user authentication, such as minimum password length, allowed characters, and combination of character types.	HDD	
	Auto Reset Time setting	Settings for session timeout in the control panel.	HDD	
	Date/Time setting	Specifies the date and time that is set.	RTC	
	HDD Data Erase setting	Settings for the HDD Data Erase function, including the settings to enable or disable the HDD Data Erase function.	HDD	
	IPSec settings	Settings for the LAN Data Protection function, including the settings to enable or disable the LAN Data Protection function.	HDD	
D.CONF	Password	Password used to authenticate the user in the User Identification and Authentication function.	HDD	
	Audit logs	Logs generated by the Audit Log function.	HDD	
	Box PIN	PIN used for access control to the Mail Box or the Memory RX Inbox where the data is stored, for Job Output Restriction functions.	HDD	

T.LL (I' CTOP I

1.8.3 **Functions**

Refer to the functions listed in Table 7.



2 Conformance claims

2.1 CC Conformance claim

This ST conforms to the following Common Criteria (CC).

- Common Criteria version: Version 3.1 Release 4
- Common Criteria conformance: Part 2 extended and Part 3 conformant Assurance level:
 - EAL2 augmented by ALC FLR.2

2.2 PP claim, Package claim

This ST conforms to the following Protection Profile (PP).

- U.S. Government Approved Protection Profile U.S. Government Protection Profile for Title: Hardcopy Devices Version 1.0 (IEEE Std 2600.2[™]-2009)
- Version: 1.0

This ST is package-conformant to and package-augmented by the following SFR Packages:

- 2600.2-PRT conformant _
- 2600.2-SCN conformant
- 2600.2-CPY conformant
- 2600.2-FAX conformant
- 2600.2-DSR conformant
- 2600.2-SMI augmented

2.3 SFR Packages

2.3.1 SFR Packages reference

Title: 2600.2-PRT, SFR Package for Hardcopy Device Print Functions, Operational Environment B Package version: 1.0, dated March 2009

Common Criteria version: Version 3.1 Revision 2

Common Criteria conformance: Part 2 and Part 3 conformant

Package conformance: EAL2 augmented by ALC FLR.2

Usage: This SFR Package shall be used for HCD products (such as printers, paper-based fax machines, and MFPs) that perform a printing function in which electronic document input is converted to physical document output.

Title: 2600.2-SCN, SFR Package for Hardcopy Device Scan Functions, Operational Environment B Package version: 1.0, dated March 2009

Common Criteria version: Version 3.1 Revision 2

Common Criteria conformance: Part 2 and Part 3 conformant

Package conformance: EAL2 augmented by ALC FLR.2

Usage: This SFR Package shall be used for HCD products (such as scanners, paper-based fax machines, and MFPs) that perform a scanning function in which physical document input is converted to electronic document output.

Title: 2600.2-CPY, SFR Package for Hardcopy Device Copy Functions, Operational Environment B Package version: 1.0, dated March 2009 Common Criteria version: Version 3.1 Revision 2 Common Criteria conformance: Part 2 and Part 3 conformant Package conformance: EAL2 augmented by ALC FLR.2



Usage: This Protection Profile shall be used for HCD products (such as copiers and MFPs) that perform a copy function in which physical document input is duplicated to physical document output.

Title: 2600.2-FAX, SFR Package for Hardcopy Device Fax Functions, Operational Environment B *Package version:* 1.0, dated March 2009

Common Criteria version: Version 3.1 Revision 2

Common Criteria conformance: Part 2 and Part 3 conformant

Package conformance: EAL2 augmented by ALC_FLR.2

Usage: This SFR Package shall be used for HCD products (such as fax machines and MFPs) that perform a scanning function in which physical document input is converted to a telephone-based document facsimile (fax) transmission, and a printing function in which a telephone-based document facsimile (fax) reception is converted to physical document output.

Title: 2600.2-DSR, SFR Package for Hardcopy Device Document Storage and Retrieval (DSR) Functions, Operational Environment B

Package version: 1.0, dated March 2009

Common Criteria version: Version 3.1 Revision 2

Common Criteria conformance: Part 2 and Part 3 conformant

Package conformance: EAL2 augmented by ALC_FLR.2

Usage: This SFR Package shall be used for HCD products (such as MFPs) that perform a document storage and retrieval feature in which a document is stored during one job and retrieved during one or more subsequent jobs.

Title: 2600.2-SMI, SFR Package for Hardcopy Device Shared-medium Interface Functions, Operational Environment B

Package version: 1.0, dated March 2009

Common Criteria version: Version 3.1 Revision 2

Common Criteria conformance: Part 2 extended and Part 3 conformant

Package conformance: EAL2 augmented by ALC_FLR.2

Usage: This SFR Package shall be used for HCD products that transmit or receive User Data or TSF Data over a communications medium which, in conventional practice, is or can be simultaneously accessed by multiple users, such as wired network media and most radio frequency wireless media. This package applies for TOEs that provide a trusted channel function allowing for secure and authenticated communication with other IT systems. If such protection is supplied only by the TOE environment, then this package cannot be claimed.

2.3.2 SFR Package functions

Functions perform processing, storage, and transmission of data that may be present in HCD products. The functions that are allowed, but not required in any particular conforming Security Target or Protection Profile, are listed in Table 7:

Designation	Definition	
F.PRT	Printing: a function in which electronic document input is converted to physical	
	document output	
F.SCN	Scanning: a function in which physical document input is converted to electronic	
	document output	
F.CPY	Copying: a function in which physical document input is duplicated to physical	
	document output	
F.FAX	Faxing: a function in which physical document input is converted to a telephone-based	
	document facsimile (fax) transmission, and a function in which a telephone-based	
	document facsimile (fax) reception is converted to physical document output	
F.DSR	Document storage and retrieval: a function in which a document is stored during one job	
	and retrieved during one or more subsequent jobs	

Table 7 —SFR Package functions



Designation	Definition
F.SMI	Shared-medium interface: a function that transmits or receives User Data or TSF Data over a communications medium which, in conventional practice, is or can be simultaneously accessed by multiple users, such as wired network media and most radio-frequency wireless media

2.3.3 SFR Package attributes

When a function is performing processing, storage, or transmission of data, the identity of the function is associated with that particular data as a security attribute. This attribute in the TOE model makes it possible to distinguish differences in Security Functional Requirements that depend on the function being performed. The attributes that are allowed, but not required in any particular conforming Security Target or Protection Profile, are listed in Table 8:

Designation	Definition	
+PRT	Indicates data that are associated with a print job.	
+SCN	Indicates data that are associated with a scan job.	
+CPY	Indicates data that are associated with a copy job.	
+FAXIN	Indicates data that are associated with an inbound (received) fax job.	
+FAXOUT	Indicates data that are associated with an outbound (sent) fax job.	
+DSR	Indicates data that are associated with a document storage and retrieval	
	job.	
+SMI	Indicates data that are transmitted or received over a Shared-medium	
	interface.	

Table 8 — SFR Package attributes

2.4 PP Conformance rationale

In addition to the primary functionality of the MFP (Copy, Print, Scan, and Fax), the TOE implements the document storage function, HDD encryption function, and the LAN data encryption function. As such, it is appropriate to conform to all of the SFR Package defined in the PP(Chapter 2.2 PP claim, Package claim).

The PP to which this ST claims to be conformant conforms to IEEE Standard Protection Profile for Hardcopy Devices in IEEE Std 2600TM-2008, Operational Environment B and also includes the contents defined in CCEVS Policy Letter #20.

In the following, the ST is compared against the PP containing six SFR Packages.

In terms of the Security Problem Definition, the ST is equivalent to the PP, except that one OSP is added:

P.STORAGE.CRYPT

This OSP restricts the TOE, not the operational environment.

As such:

- All the TOEs that satisfy the Security Problem Definition of the ST also satisfy the Security Problem Definition of the PP.

- All the operational environments that satisfy the Security Problem Definition of the PP also satisfy the Security Problem Definition of the ST.

In terms of Objectives, the ST is equivalent to the PP, except that one Objective is added:



O.STORAGE.CRYPTED

FCS_COP.1(h) and FCS_CKM.1(h) are added to realize this Objective. They are more restrictive in terms of the behavior of the TOE than the PP. Thus this Objective restricts the TOE.

As such:

- All the TOEs that satisfy the Security Objectives for the TOE of the ST also satisfy the Security Objectives for the TOE of the PP.

- All the operational environments that satisfy the Security Objectives for the operational environments of the PP also satisfy the Security Objectives for the operational environment of the ST.

In terms of the functional requirements, the ST compared with the PP contains all functional requirements of the PP including the six SFR Packages, as well as additional functional requirements, as shown in Table 9.

Note that "-" in PP Package and PP functional requirement in the table indicates "not applicable".

Table 9 — Functional requirements specified in the PP and the ST

Table 9 — Functional requirements specified in the PP and the ST			
PP_Package	PP functional requirement	ST functional requirement	
Common	FAU_GEN.1	FAU_GEN.1	
Common	FAU_GEN.2	FAU_GEN.2	
Common	FAU_SAR.1	FAU_SAR.1	
Common	FAU_SAR.2	FAU_SAR.2	
Common	FAU_STG.1	FAU_STG.1	
Common	FAU_STG.4	FAU_STG.4	
Common	FDP_ACC.1(a)	FDP_ACC.1(delete-job)	
Common	FDP_ACC.1(b)	FDP_ACC.1(exec-job)	
Common	FDP ACF.1(a)	FDP ACF.1(delete-job)	
Common	FDP ACF.1(b)	FDP ACF.1(exec-job)	
Common	FDP_RIP.1	FDP_RIP.1	
Common	FIA ATD.1	FIA ATD.1	
Common	FIA UAU.1	FIA UAU.1	
Common	FIA UID.1	FIA UID.1	
Common	FIA USB.1	FIA_USB.1	
Common	FMT MSA.1(a)	FMT_MSA.1(delete-job)	
Common	FMT MSA.3(a)	FMT MSA.3(delete-job)	
Common	FMT_MSA.1(b)	FMT_MSA.1(exec-job)	
Common	FMT_MSA.3(b)	FMT_MSA.3(exec-job)	
Common	FMT_MTD.1(FMT_MTD.1.1(a))	FMT_MTD.1(device-mgt)	
Common	FMT_MTD.1(FMT_MTD.1.1(b))	FMT_MTD.1(user-mgt)	
Common	FMT_SMF.1	FMT SMF.1	
Common	FMT_SMR.1	FMT SMR.1	
Common	FPT_STM.1	FPT STM.1	
Common	FPT_TST.1	FPT_TST.1	
Common	FTA SSL.3	FTA SSL.3(lui), FTA SSL.3(rui)	
PRT	FDP_ACC.1	FDP_ACC.1(in-job)	
PRT	FDP ACF.1	FDP ACF.1(in-job)	
SCN	FDP_ACC.1	FDP_ACC.1(in-job)	
SCN	FDP_ACF.1	FDP_ACF.1(in-job)	
СРҮ	FDP_ACC.1	FDP_ACC.1(in-job)	
СРҮ	FDP_ACF.1	FDP_ACF.1(in-job)	
FAX	FDP_ACC.1	FDP_ACC.1(in-job)	
FAX	FDP_ACF.1	FDP_ACF.1(in-job)	

Copyright CANON INC 2016



PP_Package	PP functional requirement	ST functional requirement
DSR	FDP_ACC.1	FDP_ACC.1(in-job)
DSR	FDP_ACF.1	FDP_ACF.1(in-job)
SMI	FAU_GEN.1	FAU_GEN.1
SMI	FPT_FDI_EXP.1	FPT_FDI_EXP.1
SMI	FTP_ITC.1	FTP_ITC.1
Common	-	FIA_AFL.1
Common	-	FIA_SOS.1
Common	-	FIA_UAU.7
-	-	FCS_COP.1(h)
-	-	FCS_CKM.1(h)
SMI	-	FCS_CKM.1(n)
SMI	-	FCS_COP.1(n)
SMI	-	FCS_CKM.2

Note the following:

For FDP_ACF.1(a) in the PP, the Subject for a Delete of +FAXIN D.DOC, and Delete of +FAXIN D.FUNC is specified as U.NORMAL.

For FDP_ACF.1(delete-job) in the ST, the Subject is specified as U.ADMINISTRATOR, with Access Control rule for U.NORMAL specified as "Denied".

For FDP_ACC.1 in the PP, the Subject for a Read of +FAXIN D.DOC is specified as U.NORMAL. For FDP_ACC.1(in-job) in the ST, the Subject for a Read is specified as U.ADMINISTRATOR, with Access Control rule for U.NORMAL specified as "Denied".

The ST functional requirements as mentioned above, are restrictive in the scope of Subjects allowed to Delete or Read, and restrains U.NORMAL from having access to any Object. As such, the ST functional requirements specify greater restrictions than the corresponding PP functional requirements.

For FDP_ACF.1(a) in the PP, the Subject for a Modify of +FAXIN D.FUNC is specified as U.NORMAL. For FDP_ACF.1(delete-job) in the ST, the Subject is specified as U.User, with Access Control rule specified as "Denied".

The ST functional requirement as mentioned above, does not allow use of the function to any Subject. As such, the ST functional requirement specifies greater restriction than the corresponding PP functional requirement.

Consequently, the SFRs of the ST are equivalent or more restrictive than SFRs of the PP.

As such:

- All TOEs that would meet the SFRs in the ST would also meet the SFRs in the PP.

In terms of the Security Assurance Requirements, the ST and PP are equivalent.

As such, this ST compared with the PP, specifies equal or greater restrictions on the TOE, and at most equal restrictions on the operational environment of the TOE.

Therefore, this ST claims demonstrable conformance to the PP.



3 Security Problem Definition

3.1 Notational conventions

- a) Defined terms in full form are set in title case (for example, "Document Storage and Retrieval").
- b) Defined terms in abbreviated form are set in all caps (for example, "DSR").
- c) In tables that describe Security Objectives rationale, a checkmark ("✓") placed at the intersection of a row and column indicates that the threat identified in that row is wholly or partially mitigated by the objective in that column.
- d) In tables that describe completeness of security requirements, a bold typeface letter "P" placed at the intersection of a row and column indicates that the requirement identified in that row performs a principal fulfillment of the objective indicated in that column. A letter "S" in such an intersection indicates that it performs a supporting fulfillment.
- e) In tables that describe the sufficiency of security requirements, a bold typeface requirement name and purpose indicates that the requirement performs a principal fulfillment of the objective in the same row. Requirement names and purposes set in normal typeface indicate that those requirements perform supporting fulfillments.
- f) In specifications of Security Functional Requirements (SFRs):
 - 1) **Bold** typeface indicates the portion of an SFR that has been completed or refined in this Protection Profile, relative to the original SFR definition in Common Criteria Part 2 or an Extended Component Definition.
 - 2) *Italic* typeface indicates the portion of an SFR that must be completed by the ST Author in a conforming Security Target.
 - 3) **Bold italic** typeface indicates the portion of an SFR that has been partially completed or refined in this Protection Profile, relative to the original SFR definition in Common Criteria Part 2 or an Extended Component Definition, but which also must be completed by the ST Author in a conforming Security Target.
- g) The following prefixes in Table 10 are used to indicate different entity types:

	Prefix	Type of entity
	U.	User
	D.	Data
	F.	Function
	T.	Threat
	Р.	Policy
	A.	Assumption
	0.	Objective
	OE.	Environmental objective
	+	Security attribute

Table 10 — Notational prefix conventions

3.2 Threats agents

This security problem definition addresses threats posed by four categories of threat agents:

- a) Persons who are not permitted to use the TOE who may attempt to use the TOE
- b)Persons who are authorized to use the TOE who may attempt to use TOE functions for which they are not authorized.
- c) Persons who are authorized to use the TOE who may attempt to access data in ways for which they are not authorized.



d)Persons who unintentionally cause a software malfunction that may expose the TOE to unanticipated threats.

The threats and policies defined in this Protection Profile address the threats posed by these threat agents.

3.3 Threats to TOE Assets

This section describes threats to assets described in clause 1.8.

Table 11 — Threats to User Data for the TOE		
Threat	Threat Affected Description	
	asset	
T.DOC.DIS	D.DOC	User Document Data may be disclosed to unauthorized persons
T.DOC.ALT	D.DOC	User Document Data may be altered by unauthorized persons
T.FUNC.ALT	D.FUNC	User Function Data may be altered by unauthorized persons

Threat	Affected	Description
	asset	
T.PROT.ALT	D.PROT	TSF Protected Data may be altered by unauthorized persons
T.CONF.DIS	D.CONF	TSF Confidential Data may be disclosed to unauthorized persons
T.CONF.ALT	D.CONF	TSF Confidential Data may be altered by unauthorized persons

Table 12 — Threats to TSF Data for the TOE

3.4 Organizational Security Policies for the TOE

This section describes the Organizational Security Policies (OSPs) that apply to the TOE. OSPs are used to provide a basis for Security Objectives that are commonly desired by TOE Owners in this operational environment but for which it is not practical to universally define the assets being protected or the threats to those assets.

Name	Definition
P.USER.AUTHORIZATION	To preserve operational accountability and security, Users will be
	authorized to use the TOE only as permitted by the TOE Owner.
P.SOFTWARE.VERIFICATION	To detect corruption of the executable code in the TSF, procedures
	will exist to self-verify executable code in the TSF.
P.AUDIT.LOGGING	To preserve operational accountability and security, records that
	provide an audit trail of TOE use and security-relevant events will be
	created, maintained, and protected from unauthorized disclosure or
	alteration, and will be reviewed by authorized personnel.
P.INTERFACE.MANAGEMENT	To prevent unauthorized use of the external interfaces of the TOE,
	operation of those interfaces will be controlled by the TOE and its IT
	environment.
P.STORAGE.CRYPT*)	The data to be stored in the HDD of the TOE must be encrypted

Table 13 _	-Organizati	onal Secu	rity Polic	ies for the	TOE
1abit 15 –	-Ofganizati	onai Secu	i ny i one	its for the	IOE

*) It is assumed that customers that have a policy to require HDD encryption function in the MFP.

3.5 Assumptions

The Security Objectives and Security Functional Requirements defined in subsequent sections of this Protection Profile are based on the condition that all of the assumptions described in this section are satisfied.



	Table 14 —Assumptions								
Assumption	Definition								
A.ACCESS.MANAGED	The TOE is located in a restricted or monitored environment that provides								
	protection from unmanaged access to the physical components and data								
	interfaces of the TOE.								
A.USER.TRAINING	TOE Users are aware of the security policies and procedures of their								
	organization, and are trained and competent to follow those policies and								
	procedures.								
A.ADMIN.TRAINING	Administrators are aware of the security policies and procedures of their								
	organization, are trained and competent to follow the manufacturer's								
	guidance and documentation, and correctly configure and operate the TOE in								
	accordance with those policies and procedures.								
A.ADMIN.TRUST	Administrators do not use their privileged access rights for malicious								
	purposes.								



4 Security Objectives

4.1 Security Objectives for the TOE

This section describes the Security Objectives that are satisfied by the TOE.

Table 15 — Secur	ity Objectives for the TOE
Objective	Definition
O.DOC.NO_DIS	The TOE shall protect User Document Data from unauthorized
	disclosure.
O.DOC.NO_ALT	The TOE shall protect User Document Data from unauthorized
	alteration.
O.FUNC.NO_ALT	The TOE shall protect User Function Data from unauthorized
	alteration.
O.PROT.NO_ALT	The TOE shall protect TSF Protected Data from unauthorized
	alteration.
O.CONF.NO_DIS	The TOE shall protect TSF Confidential Data from unauthorized
	disclosure.
O.CONF.NO_ALT	The TOE shall protect TSF Confidential Data from unauthorized
	alteration.
O.USER.AUTHORIZED	The TOE shall require identification and authentication of Users,
	and shall ensure that Users are authorized in accordance with
	security policies before allowing them to use the TOE.
O.INTERFACE.MANAGED	The TOE shall manage the operation of external interfaces in
	accordance with security policies.
O.SOFTWARE.VERIFIED	The TOE shall provide procedures to self-verify executable code
	in the TSF.
O.AUDIT.LOGGED	The TOE shall create and maintain a log of TOE use and security-
	relevant events, and prevent its unauthorized disclosure or
	alteration.
O.STORAGE.CRYPTED	The TOE shall encrypt the data when writing in the HDD.

Table 15 — Security Objectives for the TOE

4.2 Security Objectives for the IT environment

This section describes the Security Objectives for the IT environment.

Table 16 — Security Objectives for the 11 environment								
Objective	Definition							
OE.AUDIT_STORAGE.PROTECTED	If audit records are exported from the TOE to another							
	trusted IT product, the TOE Owner shall ensure that those							
	records are protected from unauthorized access, deletion							
	and modifications.							
OE.AUDIT_ACCESS.AUTHORIZED	If audit records generated by the TOE are exported from the							
	TOE to another trusted IT product, the TOE Owner shall							
	ensure that those records can be accessed in order to detect							
	potential security violations, and only by authorized persons							
OE.INTERFACE.MANAGED	The IT environment shall provide protection from							
	unmanaged access to TOE external interfaces.							

Table 16 — Security	Objectives	s for the IT environment	
Table 10 — Security	Objectives	s for the fr environment	

4.3 Security Objectives for the non-IT environment

This section describes the Security Objectives for non-IT environments.



Table 17 — Security Objectives for the non-11 environment							
Objective	Definition						
OE.PHYSICAL.MANAGED	The TOE shall be placed in a secure or monitored area that						
	provides protection from unmanaged physical access to the TOE.						
OE.USER.AUTHORIZED	The TOE Owner shall grant permission to Users to be authorized						
	to use the TOE according to the security policies and procedures						
	of their organization.						
OE.USER.TRAINED	The TOE Owner shall ensure that Users are aware of the security						
	policies and procedures of their organization and have the training						
	and competence to follow those policies and procedures.						
OE.ADMIN.TRAINED	The TOE Owner shall ensure that TOE Administrators are aware						
	of the security policies and procedures of their organization; have						
	the training, competence, and time to follow the manufacturer's						
	guidance and documentation; and correctly configure and operate						
	the TOE in accordance with those policies and procedures.						
OE.ADMIN.TRUSTED	The TOE Owner shall establish trust that TOE Administrators will						
	not use their privileged access rights for malicious purposes.						
OE.AUDIT.REVIEWED	The TOE Owner shall ensure that audit logs are reviewed at						
	appropriate intervals for security violations or unusual patterns of						
	activity.						

Table 17 — Security Objectives for the non-IT environment

4.4 Security Objectives rationale

This section demonstrates that each threat, organizational security policy and assumption is mitigated/eased by at least one security objective, and that such security objectives counter the threat, implement the security policy and support assumption.

		Objectives																		
Threats. Policies, and Assumptions	O.DOC.NO DIS	O.DOC.NO ALT	O.FUNC.NO ALT	O.PROT.NO ALT	O.CONF.NO DIS	O.CONF.NO ALT	O.USER.AUTHORIZED	OE.USER.AUTHORIZED	O.SOFTWARE.VERIFIED	O.AUDIT.LOGGED	OE.AUDIT STORAGE.PROTECTED	OE.AUDIT ACCESS.AUTHORIZED	OE.AUDIT.REVIEWED	O.INTERFACE.MANAGED	O.STORAGE.CRYPTED	OE.PHYISCAL.MANAGED	OE.INTERFACE.MANAGED	OE.ADMIN.TRAINED	OE.ADMIN.TRUSTED	OE.USER.TRAINED
T.DOC.DIS	✓						✓	\checkmark												
T.DOC.ALT		\checkmark					✓	✓												
T.FUNC.ALT			\checkmark				\checkmark	\checkmark												
T.PROT.ALT				\checkmark			\checkmark	\checkmark												
T.CONF.DIS					\checkmark		\checkmark	\checkmark												
T.CONF.ALT						\checkmark	\checkmark	\checkmark												
P.USER.AUTHORIZATION							✓	\checkmark												
P.SOFTWARE.VERIFICATION									\checkmark											
P.AUDIT.LOGGING										\checkmark	\checkmark	\checkmark	\checkmark							
P.INTERFACE.MANAGEMENT														\checkmark			\checkmark			
P.STORAGE.CRYPT															\checkmark					
A.ACCESS.MANAGED																\checkmark				
A.ADMIN.TRAINING																		\checkmark		

Table 18 — Completeness of Security Objectives	Table 18 —	-Completeness	of Security	Objectives
--	------------	---------------	-------------	------------

Copyright CANON INC 2016



A.ADMIN.TRUST										✓	
A.USER.TRAINING											✓

	e 19 — Sufficiency of Securi	
Threats. Policies, and Assumptions	Summary	Objectives and rationale
T.DOC.DIS	User Document Data	O.DOC.NO_DIS protects D.DOC from
	may be disclosed to	unauthorized disclosure
	unauthorized persons	O.USER.AUTHORIZED establishes user
		identification and authentication as the
		basis for authorization
		OE.USER.AUTHORIZED establishes
		responsibility of the TOE Owner to
TROCHE		appropriately grant authorization
T.DOC.ALT	User Document Data	O.DOC.NO_ALT protects D.DOC from
	may be altered by	unauthorized alteration
	unauthorized persons	O.USER.AUTHORIZED establishes user
		identification and authentication as the
		basis for authorization
		OE.USER.AUTHORIZED establishes
		responsibility of the TOE Owner to
T.FUNC.ALT	User Function Data may	appropriately grant authorization O.FUNC.NO_ALT protects D.FUNC from
I.FUNC.ALI	be altered by	unauthorized alteration
	unauthorized persons	O.USER.AUTHORIZED establishes user
	undumonized persons	identification and authentication as the
		basis for authorization
		OE.USER.AUTHORIZED establishes
		responsibility of the TOE Owner to
		appropriately grant authorization
T.PROT.ALT	TSF Protected Data may	O.PROT.NO ALT protects D.PROT from
	be altered by	unauthorized alteration
	unauthorized persons	O.USER.AUTHORIZED establishes user
	-	identification and authentication as the
		basis for authorization
		OE.USER.AUTHORIZED establishes
		responsibility of the TOE Owner to
		appropriately grant authorization
T.CONF.DIS	TSF Confidential Data	O.CONF.NO_DIS protects D.CONF from
	may be disclosed to	unauthorized disclosure
	unauthorized persons	O.USER.AUTHORIZED establishes user
		identification and authentication as the
		basis for authorization
		OE.USER.AUTHORIZED establishes
		responsibility of the TOE Owner to
TCONEALT	TSE Confidential Date	appropriately grant authorization
T.CONF.ALT	TSF Confidential Data	O.CONF.NO_ALT protects D.CONF from unauthorized alteration
	may be altered by unauthorized persons	O.USER.AUTHORIZED establishes user
	unaumorized persons	identification and authentication as the
		basis for authorization
		OE.USER.AUTHORIZED establishes
		responsibility of the TOE Owner to
		appropriately grant authorization
		appropriatory grant autiorization

Table 19 —Sufficiency of Security Objectives



Threats. Policies, and Assumptions	Summary	Objectives and rationale
P.USER.AUTHORIZATION	Users will be authorized to use the TOE	O.USER.AUTHORIZED establishes user identification and authentication as the basis for authorization to use the TOE OE.USER.AUTHORIZED establishes responsibility of the TOE Owner to appropriately grant authorization
P.SOFTWARE.VERIFICATION	Procedures will exist to self-verify executable code in the TSF	O.SOFTWARE.VERIFIED provides procedures to self-verify executable code in the TSF
P.AUDIT.LOGGING	An audit trail of TOE use and security- relevant events will be created, maintained, protected, and reviewed.	O.AUDIT.LOGGED creates and maintains a log of TOE use and security-relevant events, and prevents unauthorized disclosure or alteration OE.AUDIT_STORAGE.PROTECTED protects exported audit records from unauthorized access, deletion and modifications OE.AUDIT_ACCESS.AUTHORIZED establishes responsibility of, the TOE Owner to provide appropriate access to exported audit records OE.AUDIT.REVIEWED establishes responsibility of the TOE Owner to ensure that audit logs are appropriately reviewed
P.INTERFACE.MANAGEMENT	Operation of external interfaces will be controlled by the TOE and its IT environment.	O.INTERFACE.MANAGED manages the operation of external interfaces in accordance with security policies OE.INTERFACE.MANAGED establishes a protected environment for TOE external interfaces
P.STORAGE.CRYPT	Encrypts data to store in the HDD.	O.STORAGE.CRYPTED encrypts data when writing in the HDD.
A.ACCESS.MANAGED	The TOE environment provides protection from unmanaged access to the physical components and data interfaces of the TOE.	OE.PHYSICAL.MANAGED establishes a protected physical environment for the TOE
A.ADMIN.TRAINING	TOE Users are aware of and trained to follow security policies and procedures	OE.ADMIN.TRAINED establishes responsibility of the TOE Owner to provide appropriate Administrator training.
A.ADMIN.TRUST	Administrators do not use their privileged access rights for malicious purposes.	OE.ADMIN.TRUST establishes responsibility of the TOE Owner to have a trusted relationship with Administrators.
A.USER.TRAINING	Administrators are aware of and trained to follow security policies and procedures	OE.USER.TRAINED establishes responsibility of the TOE Owner to provide appropriate User training.



5 Extended components definition (APE_ECD)

Protection Profile defines components that are extensions to Common Criteria 3.1 Revision 2, Part 2. These extended components are defined in the Protection Profile but are used in SFR Packages, and therefore, are employed only in TOEs whose STs conform to those SFR Packages.

5.1 **FPT_FDI_EXP** Restricted forwarding of data to external interfaces

Family behaviour:

This family defines requirements for the TSF to restrict direct forwarding of information from one external interface to another external interface.

Many products receive information on specific external interfaces and are intended to transform and process this information before it is transmitted on another external interface. However, some products may provide the capability for attackers to misuse external interfaces to violate the security of the TOE or devices that are connected to the TOE's external interfaces. Therefore, direct forwarding of unprocessed data between different external interfaces is forbidden unless explicitly allowed by an authorized administrative role. The family FPT_FDI_EXP has been defined to specify this kind of functionality.

Component leveling:

FPT FDI EXP.1 Restricted forwarding of data to external interfaces		1	
--	--	---	--

FPT_FDI_EXP.1 Restricted forwarding of data to external interfaces, provides for the functionality to require TSF controlled processing of data received over defined external interfaces before these data are sent out on another external interface. Direct forwarding of data from one external interface to another one requires explicit allowance by an authorized administrative role.

Management: FPT_FDI_EXP.1

The following actions could be considered for the management functions in FMT:

- a) Definition of the role(s) that are allowed to perform the management activities
- b) Management of the conditions under which direct forwarding can be allowed by an administrative role
- c) Revocation of such an allowance.

Audit: FPT_FDI_EXP.1

The following actions should be auditable if FAU_GEN Security Audit Data Generation is included in the PP/ST:

There are no auditable events foreseen.

Rationale:

Quite often a TOE is supposed to perform specific checks and process data received on one external interface before such (processed) data are allowed to be transferred to another external interface. Examples are firewall systems but also other systems that require a specific work flow for the incoming data before it can be



transferred. Direct forwarding of such data (i.e., without processing the data first) between different external interfaces is therefore a function that—if allowed at all—can only be allowed by an authorized role.

It has been viewed as useful to have this functionality as a single component that allows specifying the property to disallow direct forwarding and require that only an authorized role can allow this. Since this is a function that is quite common for a number of products, it has been viewed as useful to define an extended component.

The Common Criteria defines attribute-based control of User Data flow in its FDP class. However, in this Protection Profile, the authors needed to express the control of both User Data and TSF Data flow using administrative control instead of attribute-based control. It was found that using FDP_IFF and FDP_IFC for this purpose resulted in SFRs that were either too implementation-specific for a Protection Profile or too unwieldy for refinement in a Security Target. Therefore, the authors decided to define an extended component to address this functionality.

This extended component protects both User Data and TSF Data, and it could therefore be placed in either the FDP or FPT class. Since its purpose is to protect the TOE from misuse, the authors believed that it was most appropriate to place it in the FPT class. It did not fit well in any of the existing families in either class, and this lead the authors to define a new family with just one member.

FPT_FDI_EXP.1 Restricted forwarding of data to external interfaces

Hierarchical to:	No other components.			
Dependencies:	FMT_SMF.1 Specification of Management Functions FMT_SMR.1 Security roles.			

FPT_FDI_EXP.1.1 The TSF shall provide the capability to restrict data received on [assignment: *list of external interfaces*] from being forwarded without further processing by the TSF to [assignment: *list of external interfaces*].



6 Security requirements

6.1 Security functional requirements

This section describes the security functional requirements for the TOE.

The text in brackets following the component identifier or element name denotes iteration operations.

6.1.1 User Authentication Function

FIA_AFL.1 Authentication failure handling

	Hierarchical to:	No other components.
	Dependencies:	FIA_UAU.1 Timing of authentication
FIA_AFL.1.1	administrator confi	ct when [selection: [assignment: positive integer number], an igurable positive integer within[assignment: range of acceptable values]] ntication attempts occur related to [assignment: list of authentication
	integer within[assig	nent: positive integer number], an administrator configurable positive gnment: range of acceptable values]] inistrator configurable positive integer within 1 to 10
		authentication events] attempts from the control panel or remote UIs.
FIA_AFL.1.2		number of unsuccessful authentication attempts has been [selection: <i>met</i> , SF shall [assignment: <i>list of actions</i>].
	[selection: <i>met, surj</i> - met	passed]
	[assignment: <i>list of</i> - Lockou	
FIA_ATD.1	User attribute d	efinition
	Hierarchical to:	No other components.
	Dependencies:	No dependencies
FIA_ATD.1.1		ntain the following list of security attributes belonging to individual users: <i>Security attributes</i>].
	[assignment: <i>list of</i> - User nam	<i>Security attributes</i>]. e, role
FIA_UAU.1	Timing of authe	ntication
	Hierarchical to:	No other components.



Dependencies: FIA_UID.1 Timing of identification

FIA_UAU.1.1 The TSF shall allow [assignment: *list of TSF-mediated actions that do not conflict with access-controlled Functions of the TOE*] on behalf of the user to be performed before the user is authenticated.

[assignment: list of TSF-mediated actions that do not conflict with access-controlled Functions of the TOE]

Submission of print jobs, fax jobs, I-fax jobs

- **FIA_UAU.1.2** The TSF shall require each user to be successfully authenticated before allowing any other TSF-mediated actions on behalf of that user.
- FIA UAU.7 Protected authentication feedback
 - Hierarchical to: No other components.

Dependencies: FIA_UAU.1 Timing of authentication

FIA_UAU.7.1 The TSF shall provide only [assignment: *list of feedback*] to the user while the authentication is in progress.

[assignment: *list of feedback*]

FIA UID.1 Timing of identification

Hierarchical to: No other components.

Dependencies: No dependencies.

FIA_UID.1.1 The TSF shall allow [assignment: *list of TSF-mediated actions that do not conflict with access-controlled Functions of the TOE*] on behalf of the user to be performed before the user is identified.

[assignment: list of TSF-mediated actions that do not conflict with access-controlled Functions of the TOE]
 Submission of print jobs, fax jobs, I-fax jobs

- **FIA_UID.1.2** The TSF shall require each user to be successfully identified before allowing any other TSF-mediated actions on behalf of that user.
- FIA_USB.1 User-subject binding
 - Hierarchical to: No other components.

Dependencies: FIA_ATD.1 User attribute definition

FIA_USB.1.1 The TSF shall associate the following user security attributes with subjects acting on the behalf of that user: [assignment: list of user security attributes].

[assignment: list of user security attributes]. - User name, role



FIA_USB.1.2 The TSF shall enforce the following rules on the initial association of user security attributes with the subjects acting on behalf of users: [assignment: *rules for the initial association of attributes*].

[assignment: *rules for the initial association of attributes*]. - None

FIA_USB.1.3 The TSF shall enforce the following rules governing changes to the user security attributes with the subjects acting on behalf of users: [assignment: *rules for the changing of attributes*].

[assignment: rules for the changing of attributes] - None

FTA_SSL.3(lui) TSF-initiated termination

Hierarchical to: No other components.

Dependencies: No dependencies.

FTA_SSL.3.1(lui) The TSF shall terminate an interactive session after a [assignment: *time interval of userinactivity*].

[assignment: *time interval of userinactivity*]. - User inactivity at the control panel lasting for the specified period of time.

FTA_SSL.3(rui) TSF-initiated termination

Hierarchical to: No other components.

- Dependencies: No dependencies.
- FTA_SSL.3.1(rui) The TSF shall terminate an interactive session after a [assignment: *time interval of userinactivity*].

[assignment: *time interval of userinactivity*]. - User inactivity at the remote UI lasting for 15 minutes.

6.1.2 Function Use Restriction Function

FMT MSA.1(exec-job) Management of security attributes

Hierarchical to:	No other components.
Dependencies:	[FDP_ACC.1 Subset access control, or FDP_IFC.1 Subset information flow control] FMT_SMR.1 Security roles FMT_SMF.1 Specification of Management Functions

FMT_MSA.1.1(exec-job) The TSF shall enforce the **TOE Function Access Control SFP**, [assignment: *access control SFP(s), information flow control SFP(s)*] to restrict the ability to [selection: *change_default, query, modify, delete, [assignment: other operations]*] the security attributes [assignment: *list of security attributes*] to [assignment: *the authorised identified roles*].



[assignment: *access control SFP(s), information flow control SFP(s)*] - None

[selection: *change_default, query, modify, delete, [assignment: other operations]*] - query, modify, delete, create

[assignment: *list of security attributes*] - Role

[assignment: *the authorised identified roles*]. - U.ADMINISTRATOR

FMT_MSA.3(exec-job) Static attribute initialisation

Hierarchical to:	No other components.
Dependencies:	FMT_MSA.1 Management of security attributes FMT_SMR.1 Security roles

FMT_MSA.3.1(exec-job) The TSF shall enforce the TOE Function Access Control Policy, [assignment: access control SFP, information flow control SFP] to provide [selection, choose one of: restrictive, permissive, [assignment: other property]] default values for security attributes that are used to enforce the SFP.

> [assignment: access control SFP, information flow control SFP] - None

[selection, choose one of: *restrictive, permissive, [assignment: other property]*] - Restrictive

[refinement]

TOE Function Access Control Policy \rightarrow TOE Function Access Control SFP

FMT_MSA.3.2(exec-job) The TSF shall allow the [assignment: *the authorized identified roles*] to specify alternative initial values to override the default values when an object or information is created.

[assignment: *the authorized identified roles*] - Nobody

FDP_ACC.1(exec-job) Subset access control

Hierarchical to: No other components.

Dependencies: FDP_ACF.1 Security attribute based access control

FDP_ACC.1.1(exec-job) The TSF shall enforce the **TOE Function Access Control SFP on users as** subjects, **TOE functions as objects**, and the right to use the functions as operations.

Hierarchical to:	No other components.
Dependencies:	FDP_ACC.1 Subset access control



FMT_MSA.3 Static attribute initialisation

FDP_ACF.1.1(exec-job) The TSF shall enforce the **TOE Function Access Control SFP** to objects based on the following: **users and [assignment:** *list of TOE functions and the security attribute(s) used to determine the TOE Function Access Control SFP*].

[assignment: list of TOE functions and the security attribute(s) used to determine the TOE Function Access Control SFP]

objects controlled under the TOE Function Access Control SFP in Table 20, and for each, the indicated security attributes in Table 20.

FDP_ACF.1.2(exec-job)The TSF shall enforce the following rules to determine if an operation among
controlled subjects and controlled objects is allowed: [selection: the user is explicitly
authorized by U.ADMINISTATOR to use a function, a user that is authorized to use the
TOE is automatically authorized to use the functions [assignment: list of functions],
[assignment: other conditions]].

[selection: the user is explicitly authorized by U.ADMINISTATOR to use a function, a user that is authorized to use the TOE is automatically authorized to use the functions [assignment: list of functions], [assignment: other conditions]] - [assignment: other conditions]

[assignment: other conditions]

- rules specified in the TOE Function Access Control SFP in Table 20 governing access among controlled users as subjects and controlled objects using controlled operations on controlled objects
- **FDP_ACF.1.3(exec-job)** The TSF shall explicitly authorise access of subjects to objects based on the following additional rules: **the user acts in the role U.ADMINISTRATOR**, [assignment: *other rules, based on security attributes, that explicitly authorise access of subjects to objects*].

[assignment: *other* rules, based on security attributes, that explicitly authorise access of subjects to objects]

None

FDP_ACF.1.4(exec-job) The TSF shall explicitly deny access of subjects to objects based on the [assignment: *rules, based on security attributes, that explicitly deny access of subjects to objects*].

[assignment: rules, based on security attributes, that explicitly deny access of subjects to objects]

None

_

Object	Attribute	Operation(s)	Subject	Attribute	Access control rule	
[Print]	+PRT	Use of the function, using pointer to the Object.	U.USER	Role	For the attribute of the Object, the role associated with the Subject, must be authorized to perform the Operation.	
[Copy]	+CPY +DSR	Use of the function, using pointer to the Object.	U.USER	Role	For the attribute of the Object, the role associated with the Subject, must be authorized to perform the Operation.	

Table 20 — TOE Function Access Control SFP



Object	Attribute	Operation(s)	Subject	Attribute	Access control rule	
[Scan]	+SCN +DSR	Use of the function, using pointer to the Object.	U.USER	Role	For the attribute of the Object, the role associated with the Subject, must be authorized to perform the Operation.	
[Fax]	+FAXOUT	Use of the function, using pointer to the Object.	U.USER	Role	For the attribute of the Object, the role associated with the Subject, must be authorized to perform the Operation.	
[Fax/I-Fax Inbox]	+FAXIN	Use of the function, using pointer to the Object.	U.USER	Role	For the attribute of the Object, the role associated with the Subject, must be authorized to perform the Operation.	
Access Stored +DSR fu Files] fu		Use of the function, using pointer to the Object.	U.USER	Role	For the attribute of the Object, the role associated with the Subject, must be authorized to perform the Operation.	
Remote UI [Access Received/Stored Files]	+DSR +FAXIN	Use of the function, using pointer to the Object.	U.USER	Role	If the role associated with the Subject is Administrator, the Operation is permitted.	

6.1.3 Job Output Restriction Functions

6.1.3.1 Delete Job

FMT_MSA.1(delete-job)	Management of security attributes
Hierarchical to:	No other components.
Dependencies:	[FDP_ACC.1 Subset access control, or FDP_IFC.1 Subset information flow control] FMT_SMR.1 Security roles FMT_SMF.1 Specification of Management Functions

FMT_MSA.1.1(delete-job) The TSF shall enforce the **Common Access Control SFP in Table 22**, [assignment: access control SFP(s), information flow control SFP(s)] to restrict the ability to [selection: change_default, query, modify, delete, [assignment: other operations]] the security attributes [assignment: list of security attributes] to [assignment: the authorised identified roles].

> [assignment: access control SFP(s), information flow control SFP(s)] - In The Job Access Control SFP in Table 23

[selection: *change_default, query, modify, delete, [assignment: other operations]*] - Refer to **"Operation"** in Table 21.

[assignment: *list of security attributes*] - Refer to **"Security Attributes"** in Table 21.

[assignment: *the authorised identified roles*] - Refer to **"Role"** in Table 21.



Security Attributes	Operation	Role
User name	delete, create, query	U.ADMINISTRATOR
Box PINs	modify, create	U.ADMINISTRATOR
PIN of own Mail Box	modify	U.NORMAL

Table 21 — Management of security attributes	Table 21 -	—Management of security attrib	outes
--	------------	--------------------------------	-------

Hierarchical to:	No other components.
Dependencies:	FMT_MSA.1 Management of security attributes FMT_SMR.1 Security roles

FMT_MSA.3.1(delete-job) The TSF shall enforce the **Common Access Control SFP in Table 22**, [assignment: access control SFP, information flow control SFP] to provide [selection, choose one of: restrictive, permissive, [assignment: other property]] default values for security attributes that are used to enforce the SFP.

[assignment: access control SFP, information flow control SFP]

- **Common Access Control SFP in Table 22**
- In The Job Access Control SFP in Table 23

[selection, choose one of: *restrictive, permissive, [assignment: other property]*] - restrictive

FMT_MSA.3.2(delete-job) The TSF shall allow the [assignment: *the authorized identified roles*] to specify alternative initial values to override the default values when an object or information is created.

[assignment: *the authorized identified roles*] - Nobody

FDP ACC.1(delete-job) Subset access control

Hierarchical to: No other components.

Dependencies: FDP_ACF.1 Security attribute based access control

- **FDP_ACC.1.1(delete-job)** The TSF shall enforce the **Common Access Control SFP in Table 22** on the list of users as subjects, objects, and operations among subjects and objects covered by the Common Access Control SFP in Table 22.
- FDP_ACF.1(delete-job)Security attribute based access control

Hierarchical to: No other components.

Dependencies:	FDP_ACC.1 Subset access control		
	FMT_MSA.3 Static attribute initialisation		

FDP_ACF.1.1(delete-job) The TSF shall enforce the **Common Access Control SFP in Table 22** to **objects** based on the following: the list of users as subjects and objects controlled under the Common Access Control SFP in Table 22, and for each, the indicated security attributes in Table 22.



- **FDP_ACF.1.2(delete-job)** The TSF shall enforce the following rules to determine if an operation among controlled subjects and controlled objects is allowed: rules specified in the Common Access Control SFP in Table 22 governing access among controlled users as subjects and controlled objects using controlled operations on controlled objects.
- **FDP_ACF.1.3(delete-job)** The TSF shall explicitly authorise access of subjects to objects based on the following additional rules: [assignment: *rules, based on security attributes, that explicitly authorise access of subjects to objects*].

[assignment: rules, based on security attributes, that explicitly authorise access of subjects to objects]

- U.ADMINISTRATOR is authorized to delete any D.DOC/D.FUNC.
- U.ADMINISTRATOR is authorized to modify any +CPY, +SCN, +DSR, +FAXOUT D.FUNC.
- **FDP_ACF.1.4(delete-job)** The TSF shall explicitly deny access of subjects to objects based on the [assignment: *rules, based on security attributes, that explicitly deny access of subjects to objects*].

[assignment: rules, based on security attributes, that explicitly deny access of subjects to objects]

None

Table 22 —Common Access Control SFF							
Object	Attribute	Operation(s)	Subject	Access control rule			
D.DOC	+PRT,+SCN,+CPY,	Delete	U.NORMAL	Denied, except for his/her own			
	+FAXOUT,			documents			
	+DSR						
D.DOC	+FAXIN	Delete	U.NORMAL	Denied			
D.FUNC	+PRT,+SCN,+CPY,	Modify;	U.NORMAL	Denied, except for his/her own			
	+FAXOUT	Delete		function data			
	+DSR						
D.FUNC	+FAXIN	Modify	U.USER	Denied			
D.FUNC	+FAXIN	Delete	U.NORMAL	Denied			

Table 22 — Common Access Control SFP

6.1.3.2 In The Job

FDP_ACC.1(in-job)Subset access control

Hierarchical to: No other components.

Dependencies: FDP_ACF.1 Security attribute based access control

FDP_ACC.1.1(in-job)The TSF shall enforce the In The Job Access Control SFP in Table 23 on the
list of subjects, objects, and operations among subjects and objects covered by the In
The Job Access Control SFP in Table 23.

FDP_ACF.1(in-job)Security attribute based access control

Dependencies:	FDP_ACC.1 Subset access control
	FMT_MSA.3 Static attribute initialisation



- FDP_ACF.1.1(in-job)The TSF shall enforce the In The Job Access Control SFP in Table 23 to objects
based on the following: the list of subjects and objects controlled under the In The Job
Access Control SFP in Table 23, and for each, the indicated security attributes in Table 23.
- FDP_ACF.1.2(in-job)The TSF shall enforce the following rules to determine if an operation among
controlled subjects and controlled objects is allowed: rules specified in the In The Job
Access Control SFP in Table 23 governing access among Users and controlled objects
using controlled operations on controlled objects.
- **FDP_ACF.1.3(in-job)** The TSF shall explicitly authorise access of subjects to objects based on the following additional rules: [assignment: *rules, based on security attributes, that explicitly authorise access of subjects to objects*].

[assignment: rules, based on security attributes, that explicitly authorise access of subjects to objects]

U.ADMINISTRATOR is authorized to read any +FAXIN/+DSR D.DOC

FDP_ACF.1.4(in-job) The TSF shall explicitly deny access of subjects to objects based on the [assignment: *rules, based on security attributes, that explicitly deny access of subjects to objects*].

[assignment: rules, based on security attributes, that explicitly deny access of subjects to objects]

None

Object	Attribute(s)	Operation	Subject	Access control rule	
D.DOC	+PRT	Read	U.USER	Denied, except for his/her own documents	
D.DOC	+SCN	Read	U.USER	Denied, except for his/her own documents	
D.DOC	+CPY	Read	U.USER	Denied	
D.DOC	+FAXIN	Read	U.NORMAL	Denied	
D.DOC	+FAXOUT	Read	U.USER	Denied, except for his/her own documents	
D.DOC	+DSR	Read	U.NORMAL	Denied, except for his/her own documents	

Table 23 —In The Job Access Control SFP

6.1.4 Forward Received Jobs Function

 FPT_FDI_EXP.1
 Restricted forwarding of data to external interfaces

Hierarchical to: No other components.

Dependencies: FMT_SMF.1 Specification of Management Functions FMT SMR.1 Security roles.

 FPT_FDI_EXP.1.1
 The TSF shall provide the capability to restrict data received on any external Interface from being forwarded without further processing by the TSF to any Shared-medium Interface.

6.1.5 HDD Data Erase Function

FDP_RIP.1 Subset residual information protection

Hierarchical to:No other components.Dependencies:No dependencies



FDP_RIP.1.1 The TSF shall ensure that any previous information content of a resource is made unavailable upon the [selection: *allocation of the resource to, deallocation of the resource from*] the following objects: **D.DOC**, [assignment: *list of objects*].

[selection: *allocation of the resource to, deallocation of the resource from*] - deallocation of the resource from

[assignment: *list of objects*] - None

6.1.6 HDD Data Encryption Function

6.1.6.1 Encryption/Decryption Function

FCS_COP.1(h) Cryptographic operation

Hierarchical to:	No other components.	

Dependencies: [FDP_ITC.1 Import of user data without security attributes, or FDP_ITC.2 Import of user data with security attributes, or FCS_CKM.1 Cryptographic key generation] FCS_CKM.4 Cryptographic key destruction

FCS_COP.1.1(h) The TSF shall perform [assignment: *list of cryptographic operations*] in accordance with a specified cryptographic algorithm [assignment: *cryptographic algorithm*] and cryptographic key sizes [assignment: *cryptographic key sizes*] that meet the following: [assignment: *list of standards*].

[assignment: *list of cryptographic operations*]

- Encryption of data written to the HDD
- Decryption of data read out from the HDD

[assignment: *cryptographic algorithm*] - AES

[assignment: *cryptographic key sizes*] - 256 bit

[assignment: *list of standards*] - FIPS PUB 197

6.1.7 LAN Data Protection Function

6.1.7.1 IP Packet Encryption Function

FCS_COP.1(n) Cryptographic operation

Hierarchical to:	No other components.
Dependencies:	[FDP_ITC.1 Import of user data without security attributes, or FDP_ITC.2 Import of user data with security attributes, or FCS_CKM.1 Cryptographic key generation] FCS_CKM.4 Cryptographic key destruction



FCS_COP.1.1(n) The TSF shall perform [assignment: *list of cryptographic operations*] in accordance with a specified cryptographic algorithm [assignment: *cryptographic algorithm*] and cryptographic key sizes [assignment: *cryptographic key sizes*] that meet the following: [assignment: *list of standards*].

[assignment: *list of cryptographic operations*]

- Encryption of IP packets sent to the LAN
- Decryption of IP packets received from the LAN

[assignment: cryptographic algorithm]

- Refer to "Cryptographic Algorithm" in Table 24.

[assignment: *cryptographic key sizes*] - Refer to "Cryptographic Key Sizes" in Table 24.

[assignment: *list of standards*] - Refer to "List of Standards" in Table 24.

Table 24 –	- IPSec cryptog	raphic algorith	m. kev sizes	and standards
	II See er jptog	a apine angoi ien	ing ney billes	wind Standard as

cryptographic algorithm	cryptographic key sizes	list of standards
3DES-CBC	168 bit	FIPS PUB 46-3
AES-CBC	128 bit, 192bit, 256 bit	FIPS PUB 197
AES-GCM	128 bit, 192bit, 256 bit	SP800-38D

FTP_ITC.1 Inter-TSF trusted channel

Hierarchical to: No other components.

Dependencies: No dependencies.

- **FTP_ITC.1.1** The TSF shall provide a communication channel between itself and another trusted IT product that is logically distinct from other communication channels and provides assured identification of its end points and protection of the communicated data from modification or disclosure.
- **FTP_ITC.1.2** The TSF shall permit **the TSF**, **another trusted IT product** to initiate communication via the trusted channel.
- **FTP_ITC.1.3** The TSF shall initiate communication via the trusted channel for **communication of D.DOC, D.FUNC, D.PROT, and D.CONF over any Shared-medium Interface**.

6.1.8 Self-Test Function

FPT TST.1 TSF testing

Hierarchical to: No other components.

Dependencies: No dependencies.

FPT_TST.1.1 The TSF shall run a suite of self tests [selection: *during initial start-up, periodically during normal operation, at the request of the authorised user, at the conditions [assignment: conditions under which self test should occur]*] to demonstrate the correct operation of [selection: [assignment: *parts of TSF], the TSF*].

[selection: during initial start-up, periodically during normal operation, at the request of the authorised user, at the conditions [assignment: conditions under which self test should occur]]

during initial start-up

[selection: *[assignment: parts of TSF], the TSF*]
 Cryptographic algorithms used with the LAN Data Protection Function (AES, 3DES)

FPT_TST.1.2 The TSF shall provide authorised users with the capability to verify the integrity of [selection: [assignment: *parts of TSF], TSF data*].

[selection: *[assignment: parts of TSF], TSF data*] - [assignment: parts of TSF]

[assignment: *parts of TSF*] - Audit log

FPT_TST.1.3 The TSF shall provide authorised users with the capability to verify the integrity of stored TSF executable code.

6.1.9 Audit Log Function

FAU_GEN.1 Audit data generation

Hierarchical to:	No other components.
Dependencies:	FPT STM.1 Reliable time stamps

- FAU_GEN.1.1 The TSF shall be able to generate an audit record of the following auditable events:
 - a) Start-up and shutdown of the audit functions;
 - b) All auditable events for the [selection, choose one of: *minimum, basic, detailed, not specified*] level of audit; and
 - c) All Auditable Events as each is defined for its Audit Level (if one is specified) for the Relevant SFR in Table 25; [assignment: *other specifically defined auditable events*].

[selection, choose one of: *minimum, basic, detailed, not specified*] - not specified

[assignment: other specifically defined auditable events] - None

FAU_GEN.1.2 The TSF shall record within each audit record at least the following information:

- a) Date and time of the event, type of event, subject identity (if applicable), and the outcome (success or failure) of the event; and
- b) For each audit event type, based on the auditable event definitions of the functional components included in the PP/ST, for each Relevant SFR listed in Table 25: (1) information as defined by its Audit Level (if one is specified), and (2) all Additional Information (if any is required); [assignment: other audit relevant information].

[assignment: *other audit relevant information*] - None



Table 25 — Audit data requirements			
Auditable event	Relevant SFR	Audit level	Additional
			information
Job completion	FDP_ACF.1	Not specified	Type of job
Both successful and unsuccessful use of	FIA_UAU.1	Basic	None required
the authentication mechanism			
Both successful and unsuccessful use of	FIA_UID.1	Basic	Attempted user
the identification mechanism			identity, if available
Use of the management functions	FMT_SMF.1	Minimum	None required
Modifications to the group of users that	FMT_SMR.1	Minimum	None required
are part of a role			
Changes to the time	FPT_STM.1	Minimum	None required
Termination of an interactive session by	FTA_SSL.3	Minimum	None required
the session locking mechanism ⁴			-
Failure of the trusted channel functions	FTP_ITC.1	Minimum	None required

Table 25 — Audit data requirements

FAU_GEN.2 User identity association

Hierarchical to:	No other components.
Dependencies:	FAU_GEN.1 Audit data generation FIA_UID.1 Timing of identification

- **FAU_GEN.2.1** For audit events resulting from actions of identified users, the TSF shall be able to associate each auditable event with the identity of the user that caused the event.
- **FPT_STM.1** Reliable time stamps

Hierarchical to: No other components.

- Dependencies: No dependencies.
- **FPT_STM.1.1** The TSF shall be able to provide reliable time stamps.
- FAU SAR.1 Audit review
 - Hierarchical to: No other components.

Dependencies: FAU_GEN.1 Audit data generation

FAU_SAR.1.1 The TSF shall provide [assignment: *authorised users*] with the capability to read [assignment: *list of audit information*] from the audit records.

[assignment: *authorised users*] - U.ADMINISTRATOR

[assignment: *list of audit information*] - Refer to the audit logs listed in Table 25.

⁴ See "Section 14.1 IEEE Std 2600.1 Errata" in the PP Guide.

In IEEE Std 2600.1, this is indicated as "Locking of an interactive session by the session locking mechanism" but notes that this is a transcription error.



FAU_SAR.1.2 The TSF shall provide the audit records in a manner suitable for the user to interpret the information.

FAU_SAR.2 Restricted audit review

Hierarchical to: No other components.

Dependencies: FAU_SAR.1 Audit review

- FAU_SAR.2.1 The TSF shall prohibit all users read access to the audit records, except those users that have been granted explicit read-access.
- FAU STG.1 Protected audit trail storage

Hierarchical to: No other components.

Dependencies: FAU_GEN.1 Audit data generation

- FAU_STG.1.1 The TSF shall protect the stored audit records in the audit trail from unauthorised deletion.
- **FAU_STG.1.2** The TSF shall be able to [selection, choose one of: *prevent, detect*] unauthorised modifications to the stored audit records in the audit trail.

[selection, choose one of: *prevent, detect*] - prevent

FAU_STG.4 Prevention of audit data loss

Hierarchical to: FAU_STG.3 Action in case of possible audit data loss

Dependencies: FAU_STG.1 Protected audit trail storage

FAU_STG.4.1 The TSF shall [selection, choose one of: *"ignore audited events," "prevent audited events, except those taken by the authorised user with special rights," "overwrite the oldest stored audit records*] and [assignment: other actions to be taken in case of audit storage failure] if the audit trail is full.

[selection, choose one of: "ignore audited events," "prevent audited events, except those taken by the authorised user with special rights," "overwrite the oldest stored audit records]

"overwrite the oldest stored audit records"

[assignment: other actions to be taken in case of audit storage failure] - None

6.1.10 Management Function

6.1.10.1 User Management Function

FIA_SOS.1 Verification of secrets

Hierarchical to: No other components.



Dependencies: No dependencies

FIA_SOS.1.1 The TSF shall provide a mechanism to verify that secrets meet [assignment: *a defined quality metric*].

[assignment: *a defined quality metric*]

- Use a password 4 to 32 characters in length
- Prohibit the use of 3 or more consecutive characters
- Use at least one uppercase character (A to Z)
- Use at least one lowercase character (a to z)
- Use at least one number (0-9)
- Use at least one non-alphabet characters (^-@[]:;,./¥!"#\$%&'()=~|{`+*}_?><)
- Allowed characters
 - All characters other than control characters

FMT_MTD.1(user-mgt) Management of TSF Data

Hierarchical to:	No other components.
Dependencies:	FMT_SMR.1 Security roles FMT SMF.1 Specification of Management Functions

FMT_MTD.1.1 (user-mgt) The TSF shall restrict the ability to [selection: change_default, query, modify, delete, clear, [assignment: other operations]] the [assignment: list of TSF Data associated with a U.NORMAL or TSF Data associated with documents or jobs owned by a U.NORMAL] to [selection, choose one of: Nobody, [selection: U.ADMINISTRATOR, the U.NORMAL to whom such TSF Data are associated]].

[selection: *change_default, query, modify, delete, clear, [assignment: other operations]*] - Refer to "Operation" in Table 26.

[assignment: list of TSF Data associated with a U.NORMAL or TSF Data associated with documents or jobs owned by a U.NORMAL]
- Refer to "TSF Data" in Table 26.

[selection, choose one of: *Nobody*, [selection: U.ADMINISTRATOR, the U.NORMAL to whom such TSF Data are associated]]

Refer to "Role" in Table 26.

Table 26 — User information management		
TSF Data	Role	Operation
User name	U.ADMINISTRATOR	delete, create, query
Role	U.ADMINISTRATOR	modify, delete, create, query
Passwords	U.ADMINISTRATOR	modify, delete, create
Own password	U.NORMAL	modify

Table 26 — User information management

FMT_SMR.1 Security roles

Hierarchical to:	No other components.
Dependencies:	FIA_UID.1 Timing of identification



FMT_SMR.1.1 The TSF shall maintain the roles **U.ADMINISTRATOR**, **U.NORMAL**, [selection: *Nobody*, [assignment: the authorised identified roles]].

[selection: *Nobody*, [assignment: the authorised identified roles]] - Nobody

- **FMT_SMR.1.2** The TSF shall be able to associate users with roles, **except for the role "Nobody" to which no user shall be associated**.
- 6.1.10.2 Cryptographic Key Management Function
- FCS CKM.1(h) Cryptographic key generation

Hierarchical to:No other components.Dependencies:[FCS_CKM.2 Cryptographic key distribution, or
FCS COP.1 Cryptographic operation]

FCS_CKM.1.1(h) The TSF shall generate cryptographic keys in accordance with a specified cryptographic key generation algorithm [assignment: *cryptographic key generation algorithm*] and specified cryptographic key sizes [assignment: *cryptographic key sizes*] that meet the following: [assignment: *list of standards*].

[assignment: *cryptographic key generation algorithm*]

Random number generation algorithm according to SP800-90A using Hash_DRBG

FCS CKM.4 Cryptographic key destruction

[assignment: *cryptographic key sizes*] - 256 bit

[assignment: *list of standards*] - Not specified

FCS_CKM.1(n) Cryptographic key generation

Hierarchical to: No other components.

Dependencies: [FCS_CKM.2 Cryptographic key distribution, or FCS_COP.1 Cryptographic operation] FCS_CKM.4 Cryptographic key destruction

FCS_CKM.1.1(n) The TSF shall generate cryptographic keys in accordance with a specified cryptographic key generation algorithm [assignment: *cryptographic key generation algorithm*] and specified cryptographic key sizes [assignment: *cryptographic key sizes*] that meet the following: [assignment: *list of standards*].

[assignment: *cryptographic key generation algorithm*] - Cryptographic key generation algorithm according to FIPS PUB 186-2

[assignment: *cryptographic key sizes*] - 128bit, 168bit, 192bit, 256 bit

[assignment: *list of standards*] - FIPS PUB 186-2



FCS CKM.2 Cryptographic key distribution

Hierarchical to:	No other components.
Dependencies:	[FDP_ITC.1 Import of user data without security attributes, or FDP_ITC.2 Import of user data with security attributes, or FCS_CKM.1 Cryptographic key generation] FCS_CKM.4 Cryptographic key destruction

FCS CKM.2.1 The TSF shall distribute cryptographic keys in accordance with a specified cryptographic key distribution method [assignment: cryptographic key distribution method] that meets the following: [assignment: list of standards].

> [assignment: *cryptographic key distribution method*] DH (Diffie Hellman) and ECDH (Elliptic Curve Diffie Hellman)

[assignment: *list of standards*] SP800-56A -

6.1.10.3 Device Management Function

FMT_MTD.1(device-mgt)	Management of TSF Data
Hierarchical to:	No other components.
Dependencies:	FMT_SMR.1 Security roles FMT_SMF.1 Specification of Management Functions

FMT MTD.1.1(device-mgt) The TSF shall restrict the ability to [selection: change default, query, modify, delete, clear, [assignment: other operations]] the [assignment: list of TSF data] to [selection, choose one of: Nobody, [selection: U.ADMINISTRATOR, [assignment: the authorized identified roles except U.NORMAL///.

> [selection: change_default, query, modify, delete, clear, [assignment: other operations]] Refer to "Operation" in Table 27.

[assignment: *list of TSF data*] Refer to "TSF Data Table 27.

[selection, choose one of: Nobody, [selection: U.ADMINISTRATOR, [assignment: the authorized identified roles except U.NORMAL]] Refer to "Role" in Table 27. _

Table 27 — Device management function							
TSF Data	Role	Operation					
Date/Time settings	U.ADMINISTRATOR	modify					
HDD Data Erase settings	U.ADMINISTRATOR	query, modify					
IPSec settings	U.ADMINISTRATOR	query, modify					
Auto Reset settings	U.ADMINISTRATOR	query, modify					
Lockout policy settings	U.ADMINISTRATOR	query, modify					
Password policy settings	U.ADMINISTRATOR	query, modify					
Audit log	U.ADMINISTRATOR	query, delete					

Table 27 — Device management function



FMT_SMF.1 Specification of Management Functions

Hierarchical to:	No other components				
Dependencies:	No dependencies.				

FMT_SMF.1.1 The TSF shall be capable of performing the following management functions: [assignment: *list of management functions to be provided by the TSF*].

[assignment: list of management functions to be provided by the TSF] - Refer to "Management Function" in Table 28.

Management Function	Operation
Date/Time settings	modify
HDD Data Erase settings	query, modify
IPSec settings	query, modify
Auto Reset settings	query, modify
Lockout policy settings	query, modify
Password policy settings	query, modify
Audit log	query, delete
Username	delete, create, query
Role	modify, delete, create, query
Password	modify, delete, create
Box PIN	modify, create
Own password	modify
PIN of own Mail Box	modify

 Table 28 — The management of security requirements

6.2 Security Assurance Requirements

Table 29 lists the Security Assurance Requirements for 2600.2-PP, Protection Profile for Hardcopy Devices, Operational Environment B, and related SFR Packages, EAL 2 augmented by ALC_FLR.2.

Table 29 — IEEE 2600.2 Security Assurance Requirements				
Assurance class	Assurance components			
ADV: Development	ADV_ARC.1 Security architecture description			
	ADV_FSP.2 Security-enforcing functional specification			
	ADV_TDS.1 Basic design			
AGD: Guidance documents	AGD_OPE.1 Operational user guidance			
	AGD_PRE.1 Preparative procedures			
ALC: Life-cycle support	ALC_CMC.2 Use of a CM system			
	ALC_CMS.2 Parts of the TOE CM coverage			
	ALC_DEL.1 Delivery procedures			
	ALC_FLR.2 Flaw reporting procedures (augmentation of EAL2)			
ASE: Security Target evaluation	ASE_CCL.1 Conformance claims			
	ASE_ECD.1 Extended components definition			
	ASE_INT.1 ST introduction			
	ASE_OBJ.2 Security objectives			
	ASE_REQ.2 Derived security requirements			
	ASE_SPD.1 Security problem definition			
	ASE_TSS.1 TOE summary specification			
ATE: Tests	ATE_COV.1 Evidence of coverage			

Table 29 — IEEE 2600.2 Securit	ty Assurance Requirements
--------------------------------	---------------------------



Assurance class	Assurance components
	ATE_FUN.1 Functional testing
	ATE_IND.2 Independent testing - sample
AVA: Vulnerability assessment	AVA_VAN.2 Vulnerability analysis

6.3 Security functional requirements rationale

6.3.1 The completeness of security requirements

Table 30 provides a mapping of TOE Security Objectives and security functional requirements. This shows how each of the security functional requirements corresponds to at least one TOE Security Objective. **Bold typeface** items provide principal (P) fulfillment of the objectives, and normal typeface items provide supporting (S) fulfillment.

		Objectives									
SFRs	0.DOC.NO_DIS	0.DOC.NO_ALT	0.FUNC.NO_ALT	0.PROT.NO_ALT	0.CONF.NO_DIS	0.CONF.NO_ALT	0.USER.AUTHORIZED	0.INTERFACE.MANAGED	O.SOFTWARE.VERIFIED	0.AUDIT.LOGGED	O.STORAGE.CRYPTED
FIA_AFL.1		Ŭ		Ť	Ť	Ť	S				
FIA_ATD.1							S				
FIA_UAU.1							Р	Р			
FIA_UAU.7							S				
FIA_UID.1	S	S	S	S	S	S	Р	Р		S	
FIA_USB.1							Р				
FTA_SSL.3(lui)							Р	Р			
FTA_SSL.3(rui)							Р	Р			
FMT_MSA.1(exec-job)							S				
FMT_MSA.3(exec-job)							S				
FDP_ACC.1(exec-job)							Р				
FDP_ACF.1(exec-job)							S				
FMT_MSA.1(delete-job)	S	S	S								
FMT_MSA.3(delete-job)	S	S	S								
FDP_ACC.1(delete-job)	Р	Р	Р								
FDP_ACF.1(delete-job)	S	S	S								
FDP_ACC.1(in-job)	Р										
FDP_ACF.1(in-job)	S										
FPT_FDI_EXP.1								Р			
FDP_RIP.1	Р										
FCS_COP.1(h)	S				S						Р
FCS_COP.1(n)	S	S	S	S	S	S					
FTP_ITC.1	Р	Р	Р	Р	Р	Р					
FCS_CKM.1(h)	S				S						Р
FCS_CKM.1(n)	S	S	S	S	S	S					
FCS_CKM.2	S	S	S	S	S	S					
FPT_TST.1									Р		

 Table 30 — The completeness of security requirements

	Objectives										
SFRs	0.DOC.NO_DIS	0.DOC.NO_ALT	0.FUNC.NO_ALT	0.PROT.NO_ALT	0.CONF.NO_DIS	0.CONF.NO_ALT	0.USER.AUTHORIZED	0.INTERFACE.MANAGED	0.SOFTWARE.VERIFIED	0.AUDIT.LOGGED	0.STORAGE.CRYPTED
FAU_GEN.1		Ť	Ť		Ť					P	Ť
FAU_GEN.2										Р	
FAU_SAR.1										Р	
FAU_SAR.2										Р	
FAU_STG.1										Р	
FAU_STG.4										Р	
FPT_STM.1										S	
FIA_SOS.1							S				
FMT_MTD.1(user-mgt)				Р	Р	Р					
FMT_SMR.1	S	S	S	S	S	S	S				
FMT_MTD.1(device-mgt)				Р	Р	Р					
FMT_SMF.1	S	S	S	S	S	S					

6.3.2 The sufficiency of security requirements

This section provides the rationale on how the security functional requirements are sufficient to satisfy the Security Objectives.

O.DOC.NO_DIS is the security objective that ensures user document data is protected from unauthorized disclosure. O.DOC.NO_DIS is addressed by the following:

Based on user identification information resulting from FIA_UID.1, roles managed by FMT_SMR.1 are assigned for access control.

The identified users are allowed to cancel only his/her own job according to FMT_MSA.1(delete-job)/FMT_MSA.3(delete-job), FDP_ACC.1(delete-job)/FDP_ACF.1(delete-job).

The identified users are allowed to access only his/her own document data in print job, according to FDP_ACC.1(in-job)/FDP_ACF.1(in-job), and Nobody is allowed to access any document data in other job types.

Furthermore, by FDP_RIP.1, complete deletion of residual information of user document data created as a result of job processing is ensured. By FCS_COP.1(h) and FCS_CKM.1(h), User Data and TSF Data in the HDD are protected from unauthorized disclosure. By FCS_COP.1(n), FTP_ITC.1, FCS_CKM.1(n), and FCS_CKM.2, User Data and TSF Data sent over the LAN are protected from unauthorized alteration and disclosure. By FMT_SMF.1, management functions related to these actions, are provided.

O.DOC.NO_ALT is the security objective that ensures protection of user document data from unauthorized alteration. O.DOC.NO_ALT is addressed by the following:

Based on user identification information resulting from FIA_UID.1, roles managed by FMT_SMR.1 are assigned for access control.

The identified users are allowed to operate only his/her own job according to FMT_MSA.1(delete-

job)/FMT_MSA.3(delete-job), FDP_ACC.1(delete-job)/FDP_ACF.1(delete-job).

Furthermore, by FCS_COP.1(n), FTP_ITC.1, FCS_CKM.1(n), and FCS_CKM.2, User Data and TSF Data sent over the LAN are protected from unauthorized alteration and disclosure. By FMT_SMF.1, management functions related to these actions, are provided.



O.FUNC.NO_ALT is the security objective that ensures protection of user function data from unauthorized alteration. O.FUNC.NO ALT is addressed by the following:

Based on user identification information resulting from FIA_UID.1, roles managed by FMT_SMR.1 are assigned for access control.

The identified users are allowed to operate only his/her own job according to FMT_MSA.1(delete-

job)/FMT_MSA.3(delete-job), FDP_ACC.1(delete-job)/FDP_ACF.1(delete-job).

Furthermore, by FCS_COP.1(n), FTP_ITC.1, FCS_CKM.1(n), and FCS_CKM.2, User Data and TSF Data sent over the LAN are protected from unauthorized alteration and disclosure. By FMT_SMF.1, management functions related to these actions, are provided.

O.PROT.NO_ALT is the security objective that ensures protection of TSF protected data from unauthorized alteration. O.PROT.NO_ALT is addressed by the following:

Based on user identification information managed by FMT_MTD.1(user-mgt) and resulting from FIA_UID.1, roles managed by FMT_SMR.1 are assigned for the Device Management function as specified by FMT_SMR.1, FMT_MTD.1(device-mgt), and FMT_SMF.1.

Furthermore, by FCS_COP.1(n), FTP_ITC.1, FCS_CKM.1(n), and FCS_CKM.2, User Data and TSF Data sent over the LAN are protected from unauthorized alteration and disclosure.

O.CONF.NO_DIS is the security objective that ensures protection of TSF confidential data from unauthorized disclosure. O.CONF.NO_DIS is addressed by the following:

Based on user identification information managed by FMT_MTD.1(user-mgt) and resulting from FIA_UID.1, roles managed by FMT_SMR.1 are assigned for the Device Management function as specified by FMT_SMR.1, FMT_MTD.1(device-mgt), and FMT_SMF.1.

Furthermore, by FCS_COP.1(h) and FCS_CKM.1(h), User Data and TSF Data in the HDD are protected from unauthorized disclosure. By FCS_COP.1(n), FTP_ITC.1, FCS_CKM.1(n), and FCS_CKM.2, User Data and TSF Data sent over the LAN are protected from unauthorized alteration and disclosure.

O.CONF.NO_ALT is the security objective that ensures protection of TSF confidential data from unauthorized alteration. O.CONF.NO_ALT is addressed by the following:

Based on user identification information managed by FMT_MTD.1(user-mgt) and resulting from FIA_UID.1, roles managed by FMT_SMR.1 are assigned for the Device Management function as specified by FMT_SMR.1, FMT_MTD.1(device-mgt), and FMT_SMF.1.

Furthermore, by FCS_COP.1(n), FTP_ITC.1, FCS_CKM.1(n), and FCS_CKM.2, User Data and TSF Data sent over the LAN are protected from unauthorized alteration and disclosure.

O.USER.AUTHORIZED is the security objective that ensures user identification and authentication.

O.USER.AUTHORIZED is addressed by the following:

Users authenticated by the identification and authentication mechanism specified by FIA_UAU.1, FIA_UID.1, FIA_UAU.7, and FIA_AFL.1, with user sessions managed by FIA_ATD.1, FIA_USB.1, and FTA_SSL.3(lui)/FTA_SSL.3(rui), are granted use of the function, as determined by access control specified by FDP_ACC.1(exec-job)/FDP_ACF.1(exec-job).

Furthermore, authorized user information are managed by FIA_SOS.1, FMT_MSA.1(exec-job), FMT_MSA.3(exec-job), and FMT_SMR.1.

O.INTERFACE.MANAGED is the security objective that ensures control of operations of the I/O interfaces in accordance with security policy. O.INTERFACE.MANAGED is addressed by the following: By FIA_UAU.1, FIA_UID.1, and FTA_SSL.3(lui)/FTA_SSL.3(rui), the user interface is managed. By FPT_FDI_EXP.1, restricted forwarding of data to the LAN is specified.

O.SOFTWARE.VERIFIED is addressed by providing the self-test procedures specified by FPT_TST.1.

O.AUDIT.LOGGED is addressed by providing the Audit Log function as specified by FAU_GEN.1, FAU_GEN.2, FAU_SAR.1, FAU_SAR.2, FAU_STG.1, and FAU_STG.4. FIA_UID.1 and FPT_STM.1 provide the means for user information and timestamps generated on audit logs.



O.STORAGE.CRYPTED is addressed by providing the Encryption/Decryption function of FCS_COP.1(h) and Cryptographic Key Management function of FCS_CKM.1(h).

6.3.3 The dependencies of security requirements

This section provides the justification for any dependencies not met.

		dencies of security requir	
Functional	Dependencies	Dependencies satisfied	Reason for not meeting
Requirement	required by CC	by ST	dependencies
FIA_AFL.1	FIA_UAU.1	FIA_UAU.1	N/A (dependencies are satisfied)
FIA_ATD.1	No dependencies.	No dependencies.	N/A (no dependencies)
FIA_UAU.1	FIA_UID.1	FIA_UID.1	N/A (dependencies are satisfied)
FIA_UAU.7	FIA_UAU.1	FIA_UAU.1	N/A (dependencies are satisfied)
FIA_UID.1	No dependencies.	No dependencies.	N/A (no dependencies)
FIA_USB.1	FIA_ATD.1	FIA_ATD.1	N/A (dependencies are satisfied)
FTA_SSL.3(lui)	No dependencies.	No dependencies.	N/A (no dependencies)
FTA SSL.3(rui)	No dependencies.	No dependencies.	N/A (no dependencies)
FMT_MSA.1(exec- job)	[FDP_ACC.1 or FDP_IFC.1] FMT_SMR.1 FMT_SMF.1	FDP_ACC.1(exec-job) FMT_SMR.1 FMT_SMF.1	N/A (dependencies are satisfied)
FMT_MSA.3(exec- job)	FMT_MSA.1 FMT_SMR.1	FMT_MSA.1(exec-job) FMT_SMR.1	N/A (dependencies are satisfied)
FDP_ACC.1(exec- job)	FDP_ACF.1	FDP_ACF.1(exec-job)	N/A (dependencies are satisfied)
FDP_ACF.1(exec-job)	FDP_ACC.1 FMT_MSA.3	FDP_ACC.1(exec-job) FMT_MSA.3(exec-job)	N/A (dependencies are satisfied)
FMT_MSA.1(delete- job)	[FDP_ACC.1 or FDP_IFC.1] FMT_SMR.1 FMT_SMF.1	FDP_ACC.1(delete-job) FMT_SMR.1 FMT_SMF.1	N/A (dependencies are satisfied)
FMT_MSA.3(delete- job)	FMT_MSA.1 FMT_SMR.1	FMT_MSA.1(delete-job) FMT_SMR.1	N/A (dependencies are satisfied)
FDP_ACC.1(delete- job)	FDP_ACF.1	FDP_ACF.1(delete-job)	N/A (dependencies are satisfied)
FDP_ACF.1(delete- job)	FDP_ACC.1 FMT_MSA.3	FDP_ACC.1(delete-job) FMT_MSA.3(delete-job)	N/A (dependencies are satisfied)
FDP ACC.1(in-job)	FDP ACF.1	FDP ACF.1(in-job)	N/A (dependencies are satisfied)
FDP_ACF.1(in-job)	FDP_ACC.1 FMT_MSA.3	FDP_ACC.1(in-job) FMT_MSA.3(delete-job)	N/A (dependencies are satisfied)
FDP_RIP.1	No dependencies.	No dependencies.	N/A (no dependencies)
FCS_COP.1(h)	[FDP_ITC.1 or FDP_ITC.2 or FCS_CKM.1(h)] FCS_CKM.4	FCS_CKM.1(h)	FCS_CKM.4 is not claimed because: Cryptographic keys are stored in RAM, and disappear when power is shut off. Also, extraction of cryptographic keys is prevented by the design of the system. As such, cryptographic keys are managed securely enough not to require any method for their destruction.
FTP ITC.1	No dependencies.	No dependencies.	N/A (no dependencies)
FCS_COP.1(n)	[FDP_ITC.1 or FDP_ITC.2 or FCS_CKM.1(n)] FCS_CKM.4	FCS_CKM.1(n)	FCS_CKM.4 is not claimed because: Cryptographic keys are stored in RAM, and disappear when power

 Table 31 — The dependencies of security requirements

Copyright CANON INC 2016




Functional	Dependencies	Dependencies satisfied	Reason for not meeting
Requirement	required by CC	by ST	dependencies is shut off. Also, extraction of
			cryptographic keys is prevented by the design of the system. As such, cryptographic keys are managed securely enough not to require any method for their destruction.
FCS_CKM.1(h)	FCS_COP.1 FCS_CKM.4	FCS_COP.1(h)	FCS_CKM.4 is not claimed because: Cryptographic keys are stored in RAM, and disappear when power is shut off. Also, extraction of cryptographic keys is prevented by the design of the system. As such, cryptographic keys are managed securely enough not to require any method for their destruction.
FCS_CKM.1(n)	[FCS_CKM.2 or FCS_COP.1] FCS_CKM.4	FCS_COP.1(n)	FCS_CKM.4 is not claimed because: Cryptographic keys are stored in RAM, and disappear when power is shut off. Also, extraction of cryptographic keys is prevented by the design of the system. As such, cryptographic keys are managed securely enough not to require any method for their destruction.
FCS_CKM.2	[FDP_ITC.1 or FDP_ITC.2 or FCS_CKM.1(n)] FCS_CKM.4	FCS_CKM.1(n)	FCS_CKM.4 is not claimed because: Cryptographic keys are stored in RAM, and disappear when power is shut off. Also, extraction of cryptographic keys is prevented by the design of the system. As such, cryptographic keys are managed securely enough not to require any method for their destruction.
FPT_TST.1	No dependencies.	No dependencies.	N/A (no dependencies)
FAU_GEN.1	FPT_STM.1	FPT_STM.1	N/A (dependencies are satisfied)
FAU_GEN.2	FAU_GEN.1 FIA_UID.1	FAU_GEN.1 FIA_UID.1	N/A (dependencies are satisfied)
FPT_STM.1	No dependencies.	No dependencies.	N/A (no dependencies)
FAU_SAR.1	FAU_GEN.1	FAU_GEN.1	N/A (dependencies are satisfied)
FAU_SAR.2	FAU_SAR.1	FAU_SAR.1	N/A (dependencies are satisfied)
FAU_STG.1	FAU_GEN.1	FAU_GEN.1	N/A (dependencies are satisfied)
FAU_STG.4	FAU_STG.1	FAU_STG.1	N/A (dependencies are satisfied)
FIA_SOS.1	No dependencies.	No dependencies.	N/A (no dependencies)
FMT_MTD.1(user- mgt)	FMT_SMR.1 FMT_SMF.1	FMT_SMR.1 FMT_SMF.1	N/A (dependencies are satisfied)
FMT_SMR.1	FIA_UID.1	FIA_UID.1	N/A (dependencies are satisfied)
FMT_MTD.1(device mgt)	FMT_SMR.1 FMT_SMF.1	FMT_SMR.1 FMT_SMF.1	N/A (dependencies are satisfied)
FMT_SMF.1	No dependencies.	No dependencies.	N/A (no dependencies)



6.4 Security assurance requirements rationale

This Protection Profile has been developed for Hardcopy Devices to be used in commercial information processing environments that require a moderate level of document security, network security, and security assurance. The TOE will be exposed to only a low level of risk because it is assumed that the TOE will be located in a restricted or monitored environment that provides almost constant protection from unauthorized and unmanaged access to the TOE and its data interfaces. Agents cannot physically access any nonvolatile storage without disassembling the TOE except for removable nonvolatile storage devices, where protection of User and TSF Data are provided when such devices are removed from the TOE environment. Agents have limited or no means of infiltrating the TOE with code to effect a change and the TOE self-verifies its executable code to detect unintentional malfunctions. As such, the Evaluation Assurance Level 2 is appropriate.

EAL 2 is augmented with ALC_FLR.2, Flaw reporting procedures. ALC_FLR.2 ensures that instructions and procedures for the reporting and remediation of identified security flaws are in place, and their inclusion is expected by the consumers of this TOE.





7 TOE Summary specification

This section describes the TOE summary specifications.

7.1 User Authentication Function

- Supported functional requirements: FIA_UAU.1, FIA_UID.1, FIA_UAU.7, FIA_ATD.1, FIA_USB.1, FIA_AFL.1, FTA_SSL.3(lui), FTA_SSL.3(rui)

When the control panel or a remote UI is used to operate the MFP, before permitting such operations, the TOE requires user authentication in order to identify and authenticate valid users. However, the submission of print jobs, fax jobs, and I-fax jobs is always permitted. [FIA_UAU.1, FIA_UID.1]

Two methods of user authentication are supported:

- External Authentication

Authentication is based on user information registered in the authentication server. This may be an Active Directory server that uses Kerberos authentication, or LDAP server that uses LDAP authentication.

- Internal Authentication

Authentication is based on user information registered in the device.

For user authentication, the TOE prompts input of the user name, password, and the login destination. User authentication succeeds only if the user name and password matches the one at the specified destination. For security, note that the password is masked by asterisks in the text field. **[FIA_UAU.7]**

The TOE issues an Access Control Token (ACT) to each user successfully authenticated.

The ACT is an object that contains the user's name and role, as well as the access permissions to the application functions that are specified for each user role. [FIA_ATD.1, FIA_USB.1]

The TOE provides a lockout function in order to minimize invalid login attempts. [FIA_AFL.1]

- This function locks out any user that fails to login successfully within the maximum number of failed authentication attempts. A value from 1 to 10 can be specified as the number of attempts before lockout (Initial value: 3).
- Any user that is locked out will not be able to login until the lockout time passes. A value from 1 to 60 minutes can be specified as the lockout time (Initial value: 3 minutes).

The TOE terminates an interactive session when there is no user activity at the control panel or remote UI lasting for a specified period of time. [FTA_SSL.3(lui), FTA_SSL.3(rui)]

- At the control panel, session timeout occurs after a specified period of user inactivity. A value from 10 seconds to 9 minutes can be specified (Initial value: 2 minutes).
- At a remote UI, session timeout occurs after 15 minutes of user inactivity.

7.2 Function Use Restriction Function

- Supported functional requirements: FDP_ACC.1(exec-job), FDP_ACF.1(exec-job), FMT_MSA.1(exec-job), FMT_SMF.1



For each UI, the TOE provides Function Use Restriction, which controls access based on the contents of the ACT issued to authenticated users. Any queries, modifications, deletions, and additions to the role contained in the ACT, are performed by U.ADMINISTRATORs only. For Function Use Restriction, the attribute of the Object is the functions itself, and is therefore fixed.

When the control panel is used, Function Use Restriction Function permits or denies use of functions depending on the settings in "Application Restrictions", which are based on the role contained in the ACT.

When a remote UI is used, Function Use Restriction Function permits or denies use of functions based on attribute values associated with the role in the ACT.

Only U.ADMINISTRATORs are allowed use of all functions.

UI	Object	Condition	Operation
Control panel	Pointer to [Print]	The role associated with U.USER must have	Executed by
		permission to the [Print] function.	activating the Object.
	Pointer to [Copy]	The role associated with U.USER must have	Executed by
		permission to the [Copy] function	activating the Object.
	Pointer to [Scan and	The role associated with U.USER must have	Executed by
	Send]	permission to the [Scan and Send] function	activating the Object.
	Pointer to [Fax]	The role associated with U.USER must have	Executed by
		permission to the [Scan and Send] function	activating the Object.
	Pointer to [Fax/I-Fax	The role associated with U.USER must have	Executed by
	Inbox]	permission to the [Access Stored Files] function	activating the Object.
	Pointer to [Access	The role associated with U.USER must have	Executed by
	Stored Files]	permission to the [Access Stored Files] function	activating the Object.
	Pointer to [Scan and	The role associated with U.USER must have	Executed by
	Store]	permission to the [Scan and Store] function	activating the Object.
Remote UI	Pointer to [Access	The role associated with U.USER is anything	Cannot be executed.
	Received/Stored Files]	other than Administrator.	

 Table 32 — Function Use Restriction Policy

7.3 Job Output Restriction Functions

For Print, Copy, Scan, and Fax TX jobs, the TOE provides the following security functions. Job Output Restriction restricts access to submitted jobs, to the user that executed the job.

7.3.1 Job Cancel

- Supported functional requirements: FDP_ACC.1(delete-job), FDP_ACF.1(delete-job), FMT_MSA.1(delete-job), FMT_MSA.3(delete-job), FMT_SMF.1

TOE can delete Print, Copy, Scan, and Fax TX jobs according to following. The user name of these jobs is initialized by username of the user that executed the job.

- U.NORMAL is authorized to delete his/her own job.
- U.ADMINISTRATOR is authorized to delete all jobs.

With the cancellation of the job, the attribute value to be attached to the job is deleted.



7.3.2 In The JOB Access Control

- Supported functional requirements: FDP_ACC.1(in-job), FDP_ACC.1(delete-job), FDP_ACF.1(in-job), FDP_ACF.1(delete-job), FMT_MSA.1(delete-job), FMT_MSA.3(deletejob), FMT_SMF.1

TOE provides the following access control functions for documents in each jobs. User name of these jobs is initialized by username of the user that executed the job.

Copy, Scan, Fax TX Jobs

- Nobody is authorized to read documents in any copy jobs.
- Nobody is authorized to read documents in any scan, and Fax TX jobs, except in case of 7.3.3 Temporarily Stored FAX TX Jobs.

Temporarily Stored Print Jobs

If a print job is submitted, the job is temporarily stored in the machine without being output. Additionally, it uses the user name associated with the print job to determine its owner, in order to realize access restriction as described below.

For temporarily stored jobs, the following operations are available to U.USERs, only if the user's name matches the user name associated with the desired job.

- Print
- Change priority for printing
- Delete

For jobs to which print is instructed, U.ADMINISTRATOR is allowed to execute the following:

- Delete

Received Fax Jobs

For documents received by fax/I-fax, the TOE provides the Memory RX Inbox where these jobs may be stored as files, to be output at a later time. Since these are stored in the Memory RX Inbox, access control to this inbox, is equivalent to access control to the stored document data. A seven digit PIN can be assigned to the Memory RX Inbox, to prevent unauthorized access by a user.

Only U.ADMINISTRATORs are authorized to initialize, set, or modify the PIN on the Memory RX Inbox, which means only U.ADMINISTRATORS are allowed access to the stored document data. The TOE realizes access restriction, by determining the U.ADMINISTRATOR that enters the correct PIN to be the owner of the stored document data, preventing any U.NORMAL from executing print or send operations on the document data.

If the control panel is used, U.ADMINISTRATOR is allowed access to the following operations without entering any PIN.

- Print
- Send
- Delete

If a remote UI is used, U.ADMINISTRATOR is allowed access to the following operations only by entering the correct PIN.



- Print
- Send
- Delete

Document Data Stored in Mail Box

For Copy, Scan, or Send jobs, the TOE provides Mail Boxes where these jobs may be stored as document data, to be printed or sent at a later time. Since these are stored in Mail Boxes, access control to Mail Boxes, is equivalent to access control to the stored document data.

A seven digit PIN can be assigned to a Mail Box, to help prevent unauthorized access by a user.

No PIN is required when storing document data in a Mail Box. The TOE realizes access restriction, by determining the U.USER that enters the correct PIN, to be the owner of the stored document data.

For document data stored in a Mail Box, the following operations are made available to U.NORMAL only by entering the correct PIN.

- Print
- Change print settings
- Preview
- Send
- Delete

If the control panel is used, U.ADMINISTRATOR is allowed access to the following operations without entering any PIN.

- Print
- Change print settings
- Preview
- Send
- Delete

If a remote UI is used, U.ADMINISTRATOR is allowed access to the following operations only by entering the correct PIN.

- Print
- Change print settings
- Preview
- Send
- Delete

[Box PIN]

For the PIN set on Mail Boxes/Memory RX Inbox, only U.ADMINISTRATORs assigned the Administrator role are allowed to set or change any PIN. Note however, that U.NORMALs are allowed to change the PIN for the Mail Box they use.

7.3.3 Temporarily Stored FAX TX Jobs

- Supported functional requirements: FDP_ACC.1(in-job), FDP_ACF.1(in-job), FDP_ACC.1(delete-job), FDP_ACF.1(delete-job)



There are two types of Send Jobs: Fax TX job and Scan job. And there are Delayed Send function and Preview function as Temporarily Stored FAX TX Jobs function to store jobs temporarily.

Delayed Send

When the TOE receives a FAX TX job with transmission time specified, it is first stored temporarily, until sending at the specified time.

For temporarily stored FAX TX jobs, the following operations are available to U.NORMALs, only if the user's name matches the user name associated with the desired job.

- Change destination

For all temporarily stored FAX TX jobs, U.ADMINISTRATOR is allowed to execute the following:

- Change destination

Preview

When the TOE receives a FAX TX job with Preview setting, it is first stored temporarily and previewed, later it is sent.

For temporarily stored FAX TX jobs, the following operations are available to U.USERs, only if the user's name matches the user name associated with the desired job.

- Preview
- Delete Pages
- Cancel Jobs

7.4 Forward Received Jobs Function

- Supported functional requirements: FPT_FDI_EXP.1

The design of the TOE prevents received data from being forwarded directly to a server or computer. This function enables the user to restrict forwarding of received jobs to the LAN.

7.5 HDD Data Erase Function

- Supported functional requirements: FDP_RIP.1

By overwriting with random data, the TOE permanently erases document data (including temporary image files) in the HDD, to ensure that no trace of the document data remains on the HDD.

The user can choose one of the following erasure methods:

- Overwrite using the DoD standard
- Overwrite with random data three times
- Overwrite once with random data
- Overwrite once with null data

The timing in which data are erased is specified below.

- Image files temporarily stored in the HDD as a result of job processing is completely erased during or after processing of the job.
- Document data are completely erased from the HDD, immediately after being deleted from Mail Box/Memory RX Inbox.
- Residual information that remained unerased due to a sudden power shutdown, are completely erased from the HDD upon startup of the TOE.

7.6 HDD Data Encryption Function

The security functions provided by the HDD data encryption chip mounted on the TOE controller board are described below.

The encryption/decryption function provides confidentiality protection for User Data and TSF Data stored in the HDD.

7.6.1 Encryption/Decryption Function

Supported functional requirements: FCS_COP.1(h)

To protect the confidentiality of User Data and TSF Data stored in the HDD, the TOE performs the following cryptographic operations to encrypt all data stored in the HDD.

- Encryption of data written to the HDD.
- Decryption of data read out from the HDD.

The cryptographic algorithm and cryptographic key size are specified below:

- AES algorithm (FIPS PUB 197)
- 256 bit key length

7.6.2 Cryptographic Key Management Function

- Supported functional requirements: FCS_CKM.1(h)

The TOE uses the following specifications for generating the cryptographic key that is used by the HDD data encryption function.

- Uses a random number generation algorithm according to NIST SP800-90A Hash_DRBG(SHA-256) for cryptographic key generation
- Generates a cryptographic key with 256 bit key length

The cryptographic key is managed as follows.

- Upon startup, the TOE reads the seed information stored in FlashROM and generates a cryptographic key.
- After generating the cryptographic key, the TOE stores the key in RAM.

No method is available for acquiring the seed from the encryption chip. Note also, that because the cryptographic key is stored in volatile RAM memory, it disappears when power is shut off.



7.7 LAN Data Protection Function

LAN Data Protection Function encrypts/decrypts all IP packets that are used in communication with an IT device.

7.7.1 IP Packet Encryption Function

- Supported functional requirements: FCS_COP.1(n), FTP_ITC.1

To ensure confidentiality and integrity of User Data and TSF Data communicated to and from an IT device, the TOE uses IPSec to encrypt/decrypt all IP packets.

- Encryption of IP packets sent to the LAN
- Decryption of IP packets received from the LAN

The following cryptographic algorithm and cryptographic key sizes are used.

- See Table 24

7.7.2 Cryptographic Key Management Function

- Supported functional requirements: FCS_CKM.1(n), FCS_CKM.2

The TOE uses the following specifications for generating the cryptographic key that is used by the IP packet encryption function.

- Uses a cryptographic key generation algorithm according to FIPS PUB 186-2
- Generates a cryptographic key with 128/168/192/256 bit key length

The following method is used by the TOE, to transmit the cryptographic key used by the IP Packet Encryption Function, to the other party

- ECDH (Elliptic Curve Diffie Hellman) and DH (Diffie Hellman) according to SP800-56A

7.8 Self-Test Function

- Supported functional requirements: FPT_TST.1

At startup, the TOE performs the following self-test.

- Checks whether cryptographic algorithms are running properly (AES, 3DES)
- Checks the integrity of the audit log
- Checks the integrity of the executable code of the cryptographic algorithm

7.9 Audit Log Function

- Supported functional requirements: FAU_GEN.1, FAU_GEN.2, FPT_STM.1, FAU_SAR.1, FAU_SAR.2, FAU_STG.1, FAU_STG.4

The TOE generates logs for the following events.



- Startup
- Shutdown
- Job completion
- User authentication success/failure
- Logout
- Use of device management functions
- Use of user management functions
- Changes to the date/time setting
- IPSec connection failures

The items that are recorded on each log, are listed below. The date/time is provided by the TOE. The TOE's date/time information is set by the Management Function, or is set by time synchronization when the accurate time is obtained from the Time Server.

- Date/Time, User Name, Event Type, Outcome (Success/Failed)

Other log events may have additional items as described below.

- Job type (job completion)
- Name of the user that failed authentication (authentication failure)

Also, export of audit logs can be performed from a remote UI, in order to read out log records, although use of this function is restricted to U.ADMINISTRATORs only.

Users other than U.ADMINISTRATOR are not allowed to export audit logs when logged in to the TOE from a remote UI.

When accessing the TOE from a remote UI, another capability restricted to U.ADMINISTRATORs only is the deletion of log records from the [Deleting Collected Logs] menu.

Users other than U.ADMINISTRATOR are not allowed access to this capability when logged in to the TOE from a remote UI, thus preventing unauthorized alterations from occurring.

A maximum of 40,000 audit records can be maintained. Once this becomes full, the oldest audit record is overwritten with the newest.

7.10 Management Functions

7.10.1 User Management Function

- Supported functional requirements: FIA_SOS.1, FMT_MTD.1(user-mgt), FMT_MSA.1(exec-job), FMT_MSA.1(delete-job), FMT_MSA.3(delete-job), FMT_SMR.1, FMT_SMF.1

In the TOE, only U.ADMINISTRATORs assigned the Administrator role can set, change, or delete user, role, and access restriction information and box PINs.

General users or U.NORMAL, can only change their own passwords and the PIN for the Mail Box they use.

[Setting/Changing/Deleting User, Role, and Access Restriction Information]



New users are registered by setting the user name and password, and assigning a role to the user. Registered user information can be modified by changing the password, or the assigned role, or the user's registration can be deleted altogether. User specified passwords are checked to see that they are consistent with the password policy.

Four roles exist, which are called "Base Roles": Administrator, Power User, General User, and Limited User. To create a new "Custom Role" different than these, any one of these four base roles is used as a template for the new role, which can then be registered.

The Administrator role is a role whose base role is "Administrator", and has administrative privileges.

The access restriction information that determines whether use of certain functions is permitted or denied, is specified by the "Application Restrictions" setting, which depends on what role is assigned. Although the initial value for "Application Restrictions" is fixed for base roles, the initial value of "Application Restrictions" can be changed for custom roles.

[Types of Users]

There are two types of users: U.ADMINISTRATOR and U.NORMAL.

- U.ADMINISTRATOR

User assigned the Administrator role and has administrative privileges.

- U.NORMAL

General user assigned a role other than Administrator role.

7.10.2 Device Management Function

Supported functional requirements: FMT_MTD.1(device-mgt), FMT_SMF.1

To provide for the effective enforcement of security functions, the TOE allows only U.ADMINISTRATORs to set the device management settings in Table 27.

The following settings are also provided.

[Password Policy Settings]

To encourage the use of strong passwords, the following password policy may be set.

- Use a password 4 to 32 characters in length
- Prohibit the use of 3 or more consecutive characters
- Use at least one uppercase characters (A to Z)
- Use at least one lowercase characters (a to z)
- Use at least one number (0-9)
- Use at least one non-alphabet characters (^-@[]:;,./¥!"#\$%&'()=~|{`+*}_?><)
- Allowed characters: All characters other than control characters

[Lockout Policy Settings]



The number of attempts before lockout and the lockout time can be set.

- Number of attempts before lockout

Select a value from 1 to 10 (Initial value: 3)

- Lockout time

Select a value from 1 to 60 minutes (Initial value: 3 minutes)

END