

Canon imageRUNNER ADVANCE 45900KG/4500 Series 2600 model

Security Target

Version 1.08 2017/03/21

Canon Inc.

Significant portions of this document were excerpted from IEEE Std 2600.1 and 2600.2, -2009 - copyright IEEE 2009 and reproduced with permission from IEEE. , All rights reserved. An use beyond what is permitted, please contact mailto:stds-ipr@ieee.org.

This document is a translation of the evaluated and certified security target written in Japanese.



Table of Contents

1	ST int	roduction	4
		T reference	
		OE reference	
		OE overview	
		erms and Abbreviations	
		OE description	
		cope of the TOE	
	1.6.1	Physical Scope of the TOE	
	1.6.2	Logical Scope of the TOE	
		sers of the TOE	
		sets of the TOE	
	1.8.1	User Data	
	1.8.1	TSF Data	
^	1.8.3	Functions	
2		rmance claims	
		C Conformance claim	
		P claim, Package claim	
		FR Packages	
	2.3.1	SFR Packages reference.	
	2.3.2	SFR Package functions	
	2.3.3	SFR Package attributes	
_		P Conformance rationale	
3		ty Problem Definition	
		otational conventions	
		hreats agents	
		hreats to TOE Assets	
		rganizational Security Policies for the TOE	
		ssumptions	
4		ty Objectives	
		ecurity Objectives for the TOE	
		ecurity Objectives for the IT environment	
		ecurity Objectives for the non-IT environment	
		ecurity Objectives rationale	
5		ded components definition (APE_ECD)	
	5.1 F	PT_FDI_EXP Restricted forwarding of data to external interfaces	26
6	Securi	ty requirements	28
	6.1 S	ecurity functional requirements	
	6.1.1	User Authentication Function	28
	6.1.2	Function Use Restriction Function	30
	6.1.3	Job Output Restriction Functions	33
	6.1.4	Forward Received Jobs Function	36
	6.1.5	HDD Data Erase Function	37
	6.1.6	HDD Data Encryption Function	37
	6.1.7	LAN Data Protection Function	
	6.1.8	Self-Test Function	
	6.1.9	Audit Log Function	
	6.1.10	· ·	
		ecurity Assurance Requirements	
	~	J	-




	6.3	Security functional requirements rationale	46
	6.3	3.1 The completeness of security requirements	46
	6.3		48
	6.3	3.3 The dependencies of security requirements	49
	6.4	Security assurance requirements rationale	51
7	TO	DE Summary specification	52
	7.1	User Authentication Function	52
	7.2	Function Use Restriction Function	52
	7.3	Job Output Restriction Functions	53
	7.3	3.1 Job Cancel	53
	7.3	3.2 In The JOB Access Control	54
	7.3	3.3 Temporarily Stored FAX TX Jobs	56
	7.4	Forward Received Jobs Function	56
	7.5	HDD Data Erase Function	56
	7.6	HDD Data Encryption Function	57
	7.6	6.1 Encryption/Decryption Function	57
	7.6	6.2 Cryptographic Key Management Function.	57
	7.7	LAN Data Protection Function	58
	7.7	7.1 IP Packet Encryption Function	58
	7.7	7.2 Cryptographic Key Management Function.	58
	7.8	Self-Test Function	58
	7.9	Audit Log Function	59
	7.10	Management Functions	60
	7.10	10.1 User Management Function	60
	7.10	10.2 Device Management Function	60

Trademark Notice

- Canon, the Canon logo, imageRUNNER, imageRUNNER ADVANCE, imagePRESS, MEAP, and the MEAP logo are registered trademarks or trademarks of Canon Inc.
- Microsoft, Internet Explorer, and Active Directory are trademarks or registered trademarks of Microsoft Corporation in the US and other countries.
- eDirectory is a trademark of Novell, Inc. in the US.

 All names of companies and products contained herein are trademarks or registered trademarks of the respective





1 ST introduction

1.1 ST reference

This section provides the Security Target (ST) identification information.

ST name: Canon imageRUNNER ADVANCE 45900KG/4500 Series 2600 model Security Target

Version: 1.08
Issued by: Canon Inc.
Date of Issue: 2017/03/21

1.2 TOE reference

This section provides the TOE identification information.

TOE name: Canon imageRUNNER ADVANCE 45900KG/4500 Series 2600 model

Version: 1.0

The TOE is comprised of the following software and hardware.

iR-ADV Security Kit-S1 for IEEE 2600 Common Criteria Certification Ver 1.00 Canon

Super G3 FAX Board-AS(Standard-equipment on "F" model) Canon imageRUNNER ADVANCE 45900KG/4500 Series

Canon Security Chip V2.10

Note that the sales names of Fax Boards are different depending on the region as shown below. Procurers needs to confirm and purchase appropriate fax board:

Japan: Super G3 FAX Board-AS1
U.S. and Korea: Super G3 FAX Board-AS2
Other regions: Super G3 FAX Board-AS1

1.3 TOE overview

The TOE is a digital multi-function product (MFP) known as < Canon imageRUNNER ADVANCE 45900KG/4500 Series 2600 model >. This is a version of the standard model < Canon imageRUNNER ADVANCE 45900KG/4500 Series > which by installing/attaching the following 2 products and making the proper settings, makes up the < Canon imageRUNNER ADVANCE 45900KG/4500 Series 2600 model > or TOE.

- iR-ADV Security Kit-S1 for IEEE 2600 Common Criteria Certification
- Fax Board (Standard-equipment on "F" model)

< iR-ADV Security Kit-S1 for IEEE 2600 Common Criteria Certification> contains the < Canon imageRUNNER ADVANCE 45900KG/4500 Series > control software.

Fax Board is hardware to use fax functionality.

Canon Security Chip V2.1 is embedded in < Canon imageRUNNER ADVANCE 45900KG/4500 Series >. < Canon imageRUNNER ADVANCE 45900KG/4500 2600 model > is capable of fully implementing the Protection Profile (PP) for Multi-Function Products indicated below, as well as the security functions required by 6 SFR Packages in the 7 SFR Packages defined in the PP, except for 2600.2-NVS, SFR Package for Hardcopy Device Nonvolatile Storage Functions, Operational Environment B. In addition, it has HDD data encryption function to encrypt all the data to be stored in the HDD.



Protection Profile

- U.S. Government Approved Protection Profile - U.S. Government Protection Profile for Hardcopy Devices Version 1.0 (IEEE Std 2600.2TM-2009)

SFR Packages


- 2600.2-PRT, SFR Package for Hardcopy Device Print Functions, Operational Environment B
- 2600.2-SCN, SFR Package for Hardcopy Device Scan Functions, Operational Environment B
- 2600.2-CPY, SFR Package for Hardcopy Device Copy Functions, Operational Environment B
- 2600.2-FAX, SFR Package for Hardcopy Device Fax Functions, Operational Environment B
- 2600.2-DSR, SFR Package for Hardcopy Device Document Storage and Retrieval (DSR) Functions, Operational Environment B
- 2600.2-SMI, SFR Package for Hardcopy Device Shared-medium Interface Functions, Operational Environment B

1.4 Terms and Abbreviations

The following terms and abbreviations are used throughout this ST.

Table 1 —Terms and Abbreviations

Terms/Abbreviations	Description
Multi-Function	A machine which incorporates the functionality of multiple devices in one, such as
Peripheral (MFP)	copier, fax, printer, and Universal Send, and containing a large capacity HDD to
	facilitate such capabilities.
Control software	Software that runs on the hardware of the device, and controls security functions.
Control panel	One of the hardware elements of the MFP, consisting of a touch panel and operation
	keys, which provides the interface for operation of the MFP.
Remote UI	An interface that provides access to the MFP from a Web browser via the LAN, to
	allow operations such as acquiring operating status, performing job operations or
	BOX operations, and making various settings.
HDD	Hard disk drive mounted on the MFP, where control software and assets are stored.
I-Fax	Short for Internet Fax. Uses the Internet instead of telephone line to receive and
	send faxes.
Image file	Image data generated within the MFP, from operations such as scan, print, and
	receive.
Temporary image file	Image files generated during jobs such as Copy and Print, which are needed only until the job completes.
Roles	Used by access restriction functions to restrict the functions that each user can use. One role is associated with each user.
	In addition to pre-defined default roles, default roles may be modified to create custom roles. The default roles are: Administrator, Power User, General User, and Limited User.
	A user assigned the Administrator role is capable of using management operations (administrative privileges).
Administrator	User assigned the Administrator role and has administrative privileges. Equivalent to U.ADMINISTRATOR defined in the PP.





Terms/Abbreviations	Description
Job	When a user uses the functions of the TOE to execute an operation on a document, a Job is the intended document data combined with the user instructions for processing those data.
	The operations that can be performed on a document are: Scan, Print, Copy, Fax TX, Save, and Delete. The processing phases for a Job issued by the user are: generation, execution, and completion.
Document data	User data processed within the MFP, consisting of image files and print setting.
Memory RX (Reception)	Allows data received by fax/I-fax to be stored in the Memory RX Inbox for later processing.
Box	Collective name for Mail Boxes, Fax Inboxes, or the Memory RX Inbox wherein data from operations such as scan, print, and received faxes are stored in the MFP.
	*Use of Fax Inboxes is not included in this TOE.
Mail Box	Whether a general user feeds data to the MFP directly, or specifies a document for printing from a PC, data can be stored here to be printed later.
Memory RX Inbox	When memory reception is set, documents received by fax/I-fax are stored in the Memory RX Inbox. Stored documents can be printed or sent later.
Mail server	Server that facilitates I-fax transmission or email transmission of document data in the MFP.
User authentication server	Server that maintains user information such as user ID and password, for user authentication over the network.
Firewall	Device or system designed to protect the internal LAN against threats from the Internet.
Time server	Server that uses the Network Time Protocol to provide the accurate time over the Internet.
[Print]	A button on the control panel that activates the function to operate on-hold print jobs.
[Copy]	A button on the control panel that activates the Copy function.
[Fax]	A button on the control panel that activates the Fax function.
[Scan]	Indicates the [Scan and Store] and [Scan and Send] buttons on the control panel, that allow the user to scan paper documents to be stored as files, or scanned documents to be sent to some location such as to an email address or a shared folder in a PC, respectively.
[Fax/I-Fax Inbox]	A button on the control panel that activates the Fax/I-Fax Inbox function. There are two types of Fax/I-Fax Inbox: the Memory RX Inbox and Confidential Fax Inbox. Both inboxes can be used to store files received by Fax and I-Fax.
[Access Stored Files]	A button on the control panel that allows the user to access files stored in a Mail Box/Inbox.
Remote UI [Access	A button on the remote UI that allows the user to access files stored in a Mail
Received/Stored Files]	Box/Inbox.

1.5 TOE description

The TOE is a MFP that offers Copy, Print, Universal Send, Fax, I-Fax RX, and Mail Box capabilities. The TOE, which conforms to "U.S. Government Approved Protection Profile - U.S. Government Protection Profile for Hardcopy Devices Version 1.0 (IEEE Std 2600.2TM-2009)" is designed to operate in an environment such as the one shown below (as excerpted from "IEEE Standard Protection Profile for Hardcopy Devices in IEEE Std 2600TM-2008 Operational Environment B" clause "1.1 Scope").


This standard is for a Protection Profile for Hardcopy Devices in a commercial information processing environment in which a moderate level of document security, network security, and security assurance are



required. Typically, the day-to-day proprietary and nonproprietary information needed to operate an enterprise will be handled by this environment. This environment will be known as "Operational Environment B."

Figure 1 shows the environment for which the TOE or < Canon imageRUNNER ADVANCE 45900KG/4500 Series 2600 model > has been designed, with options included. Since not all of these features may be required, the actual operational environment is expected to differ than what is shown here.

Figure 1 The assumed operational environment of the MFP < Canon imageRUNNER ADVANCE 45900KG/4500 Series >

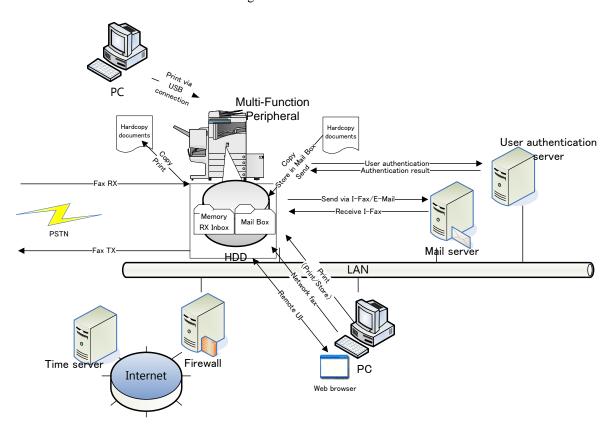

In Figure 1, the MFP is connected by an internal LAN, to all of the other major components, namely the Mail Server, User Authentication Server, PC, and Firewall. Furthermore, the internal LAN is protected by Firewall from threats from the Internet. To send (via I-Fax or email) a previously scanned document or when receiving a document by I-Fax for example, the MFP connects to the Mail Server. By using a PC with a Web browser¹, functions such as printing, storing, or I-Fax can also be executed remotely. However, in order to print from a PC, the appropriate printer driver needs to be installed in the PC. Alternatively, a USB cable could be used to connect the PC directly, and print or store document data from the PC. In this case, some configuration is required initially, in order to protect against data being taken out of the MFP and stored in a PC or USB device.

The TOE also obtains accurate time from the Time server for time synchronization, and supports user authentication through the External Authentication Server. The TOE has HDD encryption function to encrypt all the data to be stored in the internal HDD.

The functions available to the MFP in such an environment are listed below:

_

¹ This evaluation was performed using Microsoft Internet Explorer 11 as the Web browser.



- Copy function

Produces duplicates of the hardcopy document by scanning and printing.

- Print function

Produces a hardcopy document from its electronic form (contained in the MFP or sent from a PC).

- I-Fax RX (receive) function

Uses the Internet to receive faxes. Data received by I-fax is not printed immediately; rather it is stored in Memory RX Inbox for processing at a later time. Stored documents can be printed, sent or deleted later.

- Fax RX (receive) function

Uses a fax line to receive faxes. Data received by fax is not printed immediately; rather it is stored in Memory RX Inbox for processing at a later time. Stored documents can be printed, sent or deleted later.

- Fax TX (send) function

Scanned document data or electronic documents stored in Mail Box/Memory RX Inbox can be retrieved for transmission by fax.

- Universal Send function

Scanned document data or electronic documents stored in Mail Box/Memory RX Inbox can be transmitted by email or I-fax, or sent to a shared folder on a PC, in TIFF or PDF file format.

- Mail Box function

Refers to the storage of image files into a Mail Box or in Memory RX Inbox, or to functions that utilize the Mail Box/inbox functionality.

- Image files Stored in Mail Box

Scanned document data or electronic data specified for storage from a PC, are stored in a Mail Box

- Functions that utilize Mail Box functionality

The following functions can be executed on data stored in a Mail Box.

- Edit (document/print setting)
- Print
- Send
- Delete

1.6 Scope of the TOE

The TOE conforms to "U.S. Government Approved Protection Profile - U.S. Government Protection Profile for Hardcopy Devices Version 1.0 (IEEE Std 2600.2TM-2009)" and is designed to meet the requirements specified therein, as described below.

The physical and logical scopes of the TOE are described below.

1.6.1 Physical Scope of the TOE

The TOE is a MFP consisting of hardware and software components. The physical scope of the TOE is illustrated in Figure 2.






Figure 2 Hardware and software components of the TOE

	Control Software (TOE Software)
Fax board (Standard equipment on "F model")	Canon imageRUNNER ADVANCE 45900KG/4500 Series
(TOE: Hardware)	MFP Hardware (TOE: Hardware)

In Figure 2, "Control Software" refers to the < iR-ADV Security Kit-S1 for IEEE 2600 Common Criteria Certification>.

Note also that the "MFP Hardware" together with the < iR-ADV Security Kit-S1 for IEEE 2600 Common Criteria Certification> make up the MFP main unit.

The TOE or < Canon imageRUNNER ADVANCE 45900KG/4500 Series 2600 model > consists of the MFP main unit combined with the Fax Board.

< Canon imageRUNNER ADVANCE 45900KG/4500 Series >, or the hardware making up the TOE, refers to the following product lineup.

Table 2 —Line of Products

Products
iR-ADV 45951KG/45945KG/45935KG/45925KG
iR-ADV 4551/4551i
iR-ADV 4545/4545i/4545F
iR-ADV 4535/4535i/4535F
iR-ADV 4525/4525i/4525F

The Fax Board composing the TOE is called differently as follows, depending on the sales region. By procuring appropriate fax board and combining with the TOE, the Fax Board is identified and makes up the TOE.

Japan: Super G3 FAX Board-AS1
U.S and Korea: Super G3 FAX Board-AS2
Other regions: Super G3 FAX Board-AS1

The documentation for the TOE are listed below.

(English Name)

- iR-ADV Security Kit-S1 for IEEE 2600 Common Criteria Certification Administrator Guide [FT6-1879 (000)]
- Before Using the iR-ADV Security Kit-S1 for IEEE 2600 Common Criteria Certification [FT6-1880 (000)]
- imageRUNNER ADVANCE 4500 Series 2600 model User's Guide CD (USE Version) [FT6-1881 (000)]
- imageRUNNER ADVANCE 4500 Series 2600 model User's Guide CD (APE Version) [FT6-1882 (000)]

(Japanese Name)

- iR-ADV Security Kit-S1 for IEEE 2600 Administrator Guide [FT6-1876 (000)]
- Before Using the iR-ADV Security Kit-S1 for IEEE 2600 [FT6-1877 (000)]
- imageRUNNER ADVANCE 4500 Series 2600 model User's Guide CD [FT6-1878 (000)]



1.6.2 Logical Scope of the TOE

The logical scope of the TOE is illustrated in Figure 3 (excluding: User, User Authentication Server, Mail Server, PC, and Time Server). In the table, the security functions of the TOE are shown in blue.


User Auth Server Mail Server PC Time Server Time Function User Auth Function Email Function Web Browser LAN Data Protection LAN Data Protection LAN Data Protection LAN Data Protection AuthInfo TimeInfo DocData DocData TOE LAN Data Protection Function PC Function Use Restriction User Authentication HDD Data Erase USB connection Audit Log Self-Test Job Output Restriction ocument data FAX Management Function Forward Received Jobs Phone line Copy Mail box/ Inbox Print HDD Data Encryption Send Receive Scan UI Func HDD Output Func Input Func ▶ Flow of data Operate/ Hardcopy Hardcopy document document Display User

Figure 3 Functional configuration of the TOE

In addition to the capabilities described in Section 1.5, the TOE embodies the following basic functionality.

- UI Functionality
 - Enables the user to operate the TOE from the control panel, and the TOE to display information on the control panel.
- Output Functionality
 - Enables the TOE to output hardcopy documents.
- Input Functionality
 - Enables the TOE to input hardcopy documents.

The TOE embodies the following security functions.





- User Authentication Function

Performs authentication on the user, to prevent any unauthorized access to the TOE.

Two types of user authentication are supported: Internal Authentication wherein authentication takes place internally within the TOE, and External Authentication which uses an external user authentication server. External authentication uses Kerberos² or LDAP³ authentication.

- Function Use Restriction Function

Uses role management to restrict the functions that each authenticated user can use.

- Job Output Restriction Function

This function restricts access to print, cancel, and other job operations, to the user that executed the job.

- Forward Received Jobs Function

This function restricts the machine from forwarding received data directly to the LAN. It is provided as a countermeasure against threats arising from misuse of the fax line.

- HDD Data Erase Function

Function for erasing unnecessary data from the hard disk by overwriting the data, in order to prevent unauthorized use of previously generated image data.

- HDD Data Encryption Function

All data stored in the HDD are encrypted by the encryption chip mounted on the MFP in order to prevent unauthorized access to the HDD data by removing the HDD.

- LAN Data Protection Function

To protect LAN data from IP packet sniffing, IP packets are encrypted using IPSec.

- Self-Test Function

When the machine starts, this function checks to see that the primary security functions are running properly.

- Audit Log Function

Allows auditing of user operations by generating logs which are stored in the HDD. Stored audit logs are protected and can be viewed.

The date/time recorded on the audit log is provided by the TOE. The TOE's date/time information is set by the Management Function, or is set by time synchronization when the accurate time is obtained from the Time Server.

Management Function

Consists of user management functions such as user registration and role management, and device management functions which enable proper operation of various security functions, which can only be specified by Administrators.

1.7 Users of the TOE

The TOE has two types of users (U.USER): U.NORMAL and U.ADMINISTRATOR

Table 3 —Users

Designation	Definition

² This evaluation was performed using Active Directory Domain Services as the authentication server software for Kerberos authentication.

³ This evaluation was performed using eDirectory 8.8 SP8 as the authentication server software for LDAP authentication.



U.USER		Any authorized User.
	U.NORMAL	A User who is authorized to perform User Document Data processing functions
		of the TOE.
	U.ADMINISTRATOR	A User who has been specifically granted the authority to manage some portion
		or all of the TOE and whose actions may affect the TOE security policy (TSP).
Administrators may pe		Administrators may possess special privileges that provide capabilities to
		override portions of the TSP.

1.8 Assets

There are three types of assets: User Data, TSF Data, and Functions.

1.8.1 User Data

User Data are created by the user, and have no effect on TOE security functions. There are two types of User Data: D.DOC and D.FUNC.

Table 4 — User Data

Designation	Definition	
D.DOC	User Document Data consists of the information contained in a user's document. This	
	includes the original document itself in either hardcopy or electronic form, image data, or	
	residually-stored data created by the hardcopy device while processing an original docume	
	and printed hardcopy output.	
D.FUNC	User Function Data are the information about a user's document or job to be processed by the	
	TOE.	

1.8.2 TSF Data

TSF Data are data that have an effect on TOE security functions. There are two types of TSF Data: D.PROT and D.CONF.


Table 5 — TSF Data

Designation	Definition	
D.PROT	TSF Protected Data are assets for which alteration by a User who is neither an Administrator	
	nor the owner of the data would have an effect on the operational security of the TOE, but	
	for which disclosure is acceptable.	
D.CONF	TSF Confidential Data are assets for which either disclosure or alteration by a User who is	
	neither an Administrator nor the owner of the data would have an effect on the operational	
	security of the TOE.	

A list of the TSF data used in this TOE is given in Table 6.

Table 6 — List of TSF data

Type	TSF Data	Description	Stored in
D.PROT	User name User identification information used by the user		HDD
		identification and authentication function.	
	Role	Used by access restriction functions to restrict the functions	HDD
		that each user can use.	
	Lockout policy	Settings for the lockout function, such as number of attempts	HDD
	settings	before lockout and the lockout time.	






Type	TSF Data	Description	Stored in
	Password policy	Policy for the password for user authentication, such as	HDD
	settings	minimum password length, allowed characters, and	
combination of character types.		combination of character types.	
	Auto Reset Time	Settings for session timeout in the control panel.	HDD
	setting		
	Date/Time setting	Specifies the date and time that is set.	RTC
	HDD Data Erase	Settings for the HDD Data Erase function, including the	HDD
	setting	settings to enable or disable the HDD Data Erase function.	
	IPSec settings	Settings for the LAN Data Protection function, including the	HDD
		settings to enable or disable the LAN Data Protection	
		function.	
D.CONF	Password	Password used to authenticate the user in the User	HDD
		Identification and Authentication function.	
	Audit logs	Logs generated by the Audit Log function.	HDD
	Box PIN	PIN used for access control to the Mail Box or the Memory	HDD
		RX Inbox where the data is stored, for Job Output	
		Restriction functions.	

1.8.3 Functions

Refer to the functions listed in Table 7.





2 Conformance claims

2.1 CC Conformance claim

This ST conforms to the following Common Criteria (CC).

- Common Criteria version: Version 3.1 Release 4

Common Criteria conformance: Part 2 extended and Part 3 conformant
 Assurance level: EAL2 augmented by ALC FLR.2

2.2 PP claim, Package claim

This ST conforms to the following Protection Profile (PP).

- Title: U.S. Government Approved Protection Profile - U.S. Government Protection Profile for Hardcopy Devices Version 1.0 (IEEE Std 2600.2TM-2009)

- Version: 1.0

This ST is package-conformant to and package-augmented by the following SFR Packages:

2600.2-PRT conformant

- 2600.2-SCN conformant
- 2600.2-CPY conformant
- 2600.2-FAX conformant
- 2600.2-DSR conformant
- 2600.2-SMI augmented

2.3 SFR Packages

2.3.1 SFR Packages reference

Title: 2600.2-PRT, SFR Package for Hardcopy Device Print Functions, Operational Environment B

Package version: 1.0, dated March 2009

Common Criteria version: Version 3.1 Revision 2

Common Criteria conformance: Part 2 and Part 3 conformant **Package conformance:** EAL2 augmented by ALC FLR.2

Usage: This SFR Package shall be used for HCD products (such as printers, paper-based fax machines, and MFPs) that perform a printing function in which electronic document input is converted to physical document output.

Title: 2600.2-SCN, SFR Package for Hardcopy Device Scan Functions, Operational Environment B


Package version: 1.0, dated March 2009

Common Criteria version: Version 3.1 Revision 2

Common Criteria conformance: Part 2 and Part 3 conformant **Package conformance:** EAL2 augmented by ALC_FLR.2

Usage: This SFR Package shall be used for HCD products (such as scanners, paper-based fax machines, and MFPs) that perform a scanning function in which physical document input is converted to electronic

document output.





Title: 2600.2-CPY, SFR Package for Hardcopy Device Copy Functions, Operational Environment B

Package version: 1.0, dated March 2009

Common Criteria version: Version 3.1 Revision 2

Common Criteria conformance: Part 2 and Part 3 conformant **Package conformance:** EAL2 augmented by ALC_FLR.2

Usage: This Protection Profile shall be used for HCD products (such as copiers and MFPs) that perform a

copy function in which physical document input is duplicated to physical document output.

Title: 2600.2-FAX, SFR Package for Hardcopy Device Fax Functions, Operational Environment B

Package version: 1.0, dated March 2009

Common Criteria version: Version 3.1 Revision 2

Common Criteria conformance: Part 2 and Part 3 conformant **Package conformance:** EAL2 augmented by ALC_FLR.2

Usage: This SFR Package shall be used for HCD products (such as fax machines and MFPs) that perform a scanning function in which physical document input is converted to a telephone-based document facsimile (fax) transmission, and a printing function in which a telephone-based document facsimile (fax) reception is converted to physical document output.

Title: 2600.2-DSR, SFR Package for Hardcopy Device Document Storage and Retrieval (DSR) Functions,

Operational Environment B

Package version: 1.0, dated March 2009

Common Criteria version: Version 3.1 Revision 2

Common Criteria conformance: Part 2 and Part 3 conformant **Package conformance:** EAL2 augmented by ALC FLR.2

Usage: This SFR Package shall be used for HCD products (such as MFPs) that perform a document storage and retrieval feature in which a document is stored during one job and retrieved during one or more subsequent jobs.

Title: 2600.2-SMI, SFR Package for Hardcopy Device Shared-medium Interface Functions, Operational

Environment B

Package version: 1.0, dated March 2009

Common Criteria version: Version 3.1 Revision 2

Common Criteria conformance: Part 2 extended and Part 3 conformant

Package conformance: EAL2 augmented by ALC_FLR.2

Usage: This SFR Package shall be used for HCD products that transmit or receive User Data or TSF Data over a communications medium which, in conventional practice, is or can be simultaneously accessed by multiple users, such as wired network media and most radio frequency wireless media. This package applies for TOEs that provide a trusted channel function allowing for secure and authenticated communication with other IT systems. If such protection is supplied only by the TOE environment, then this package cannot be claimed.

2.3.2 SFR Package functions

Functions perform processing, storage, and transmission of data that may be present in HCD products. The functions that are allowed, but not required in any particular conforming Security Target or Protection Profile, are listed in Table 7:

Table 7 —SFR Package functions

Designation	Definition
F.PRT	Printing: a function in which electronic document input is converted to physical document
	output



Designation	Definition
F.SCN	Scanning: a function in which physical document input is converted to electronic document
	output
F.CPY	Copying: a function in which physical document input is duplicated to physical document
	output
F.FAX	Faxing: a function in which physical document input is converted to a telephone-based
	document facsimile (fax) transmission, and a function in which a telephone-based document
	facsimile (fax) reception is converted to physical document output
F.DSR	Document storage and retrieval: a function in which a document is stored during one job and
	retrieved during one or more subsequent jobs
F.SMI	Shared-medium interface: a function that transmits or receives User Data or TSF Data over
	a communications medium which, in conventional practice, is or can be simultaneously
	accessed by multiple users, such as wired network media and most radio-frequency wireless
	media

2.3.3 SFR Package attributes

When a function is performing processing, storage, or transmission of data, the identity of the function is associated with that particular data as a security attribute. This attribute in the TOE model makes it possible to distinguish differences in Security Functional Requirements that depend on the function being performed. The attributes that are allowed, but not required in any particular conforming Security Target or Protection Profile, are listed in Table 8:

Designation **Definition** +PRT Indicates data that are associated with a print job. +SCN Indicates data that are associated with a scan job. +CPY Indicates data that are associated with a copy job. +FAXIN Indicates data that are associated with an inbound (received) fax job. +FAXOUT Indicates data that are associated with an outbound (sent) fax job. +DSR Indicates data that are associated with a document storage and retrieval job. +SMI Indicates data that are transmitted or received over a Shared-medium interface.

Table 8 —SFR Package attributes

2.4 PP Conformance rationale

In addition to the primary functionality of the MFP (Copy, Print, Scan, and Fax), the TOE implements the document storage function, HDD encryption function, and the LAN data encryption function. As such, it is appropriate to conform to all of the SFR Package defined in the PP(Chapter 2.2 PP claim, Package claim).

The PP to which this ST claims to be conformant conforms to IEEE Standard Protection Profile for Hardcopy Devices in IEEE Std 2600TM-2008, Operational Environment B and also includes the contents defined in CCEVS Policy Letter #20.

In the following, the ST is compared against the PP containing six SFR Packages.

In terms of the Security Problem Definition, the ST is equivalent to the PP except that the following OSP is added:

P.STORAGE.CRYPT

This OSP restricts the TOE rather than the operational environment.

As such:



- All the TOEs that satisfy the Security Problem Definition of the ST also satisfy the Security Problem Definition of the PP.
- All the operational environments that satisfy the Security Problem Definition of the PP also satisfy the Security Problem Definition of the ST.

When PP and ST is compared in terms of objectives, they are equivalent except that the following objective is added:

O.STORAGE.CRYPTED

FCS_COP.1(h) and FCS_CKM.1(h) are added to realize this objective. These are more restrictive than the PP in terms of the TOE behavior. Thus this objective restricts the TOE.

As such:


- All the TOEs that satisfy the Security Objectives for the TOE of the ST also satisfy the Security Objectives for the TOE of the PP.
- All the operational environments that satisfy the Security Objectives for the operational environments of the PP also satisfy the Security Objectives for the operational environment of the ST.

In terms of the functional requirements, the ST compared with the PP contains all functional requirements of the PP including the six SFR Packages, as well as additional functional requirements, as shown in Table 9.

Note that "-" in PP Package and PP functional requirement in the table indicates "not applicable".

Table 9 — Functional requirements specified in the PP and the ST

PP_Package	PP functional requirement	ST functional requirement
Common	FAU_GEN.1	FAU_GEN.1
Common	FAU_GEN.2	FAU_GEN.2
Common	FAU_SAR.1	FAU_SAR.1
Common	FAU_SAR.2	FAU_SAR.2
Common	FAU_STG.1	FAU_STG.1
Common	FAU_STG.4	FAU_STG.4
Common	FDP_ACC.1(a)	FDP_ACC.1(delete-job)
Common	FDP_ACC.1(b)	FDP_ACC.1(exec-job)
Common	FDP_ACF.1(a)	FDP_ACF.1(delete-job)
Common	FDP_ACF.1(b)	FDP_ACF.1(exec-job)
Common	FDP_RIP.1	FDP_RIP.1
Common	FIA_ATD.1	FIA_ATD.1
Common	FIA_UAU.1	FIA_UAU.1
Common	FIA_UID.1	FIA_UID.1
Common	FIA_USB.1	FIA_USB.1
Common	FMT_MSA.1(a)	FMT_MSA.1(delete-job)
Common	FMT_MSA.3(a)	FMT_MSA.3(delete-job)
Common	FMT_MSA.1(b)	FMT_MSA.1(exec-job)
Common	FMT_MSA.3(b)	FMT_MSA.3(exec-job)
Common	FMT_MTD.1(FMT_MTD.1.1(a))	FMT_MTD.1(device-mgt)
Common	FMT_MTD.1(FMT_MTD.1.1(b))	FMT_MTD.1(user-mgt)
Common	FMT_SMF.1	FMT_SMF.1
Common	FMT_SMR.1	FMT_SMR.1
Common	FPT_STM.1	FPT_STM.1
Common	FPT_TST.1	FPT_TST.1
Common	FTA_SSL.3	FTA_SSL.3(lui), FTA_SSL.3(rui)
PRT	FDP_ACC.1	FDP_ACC.1(in-job)





PP_Package	PP functional requirement	ST functional requirement
PRT	FDP_ACF.1	FDP_ACF.1(in-job)
SCN	FDP_ACC.1	FDP_ACC.1(in-job)
SCN	FDP_ACF.1	FDP_ACF.1(in-job)
CPY	FDP_ACC.1	FDP_ACC.1(in-job)
CPY	FDP_ACF.1	FDP_ACF.1(in-job)
FAX	FDP_ACC.1	FDP_ACC.1(in-job)
FAX	FDP_ACF.1	FDP_ACF.1(in-job)
DSR	FDP_ACC.1	FDP_ACC.1(in-job)
DSR	FDP_ACF.1	FDP_ACF.1(in-job)
SMI	FAU_GEN.1	FAU_GEN.1
SMI	FPT_FDI_EXP.1	FPT_FDI_EXP.1
SMI	FTP_ITC.1	FTP_ITC.1
Common	-	FIA_AFL.1
Common	-	FIA_SOS.1
Common	-	FIA_UAU.7
-	-	FCS_COP.1(h)
-	-	FCS_CKM.1(h)
SMI	-	FCS_CKM.1(n)
SMI	-	FCS_COP.1(n)
SMI	-	FCS_CKM.2

Note the following:

For FDP_ACF.1(a) in the PP, the Subject for a Delete of +FAXIN D.DOC, and Delete of +FAXIN D.FUNC is specified as U.NORMAL.

For FDP_ACF.1(delete-job) in the ST, the Subject is specified as U.ADMINISTRATOR, with Access Control rule for U.NORMAL specified as "Denied".

For FDP_ACC.1 in the PP, the Subject for a Read of +FAXIN D.DOC is specified as U.NORMAL. For FDP_ACC.1(in-job) in the ST, the Subject for a Read is specified as U.ADMINISTRATOR, with Access Control rule for U.NORMAL specified as "Denied".

The ST functional requirements as mentioned above, are restrictive in the scope of Subjects allowed to Delete or Read, and restrains U.NORMAL from having access to any Object. As such, the ST functional requirements specify greater restrictions than the corresponding PP functional requirements.

For FDP_ACF.1(a) in the PP, the Subject for a Modify of +FAXIN D.FUNC is specified as U.NORMAL. For FDP_ACF.1(delete-job) in the ST, the Subject is specified as U.User, with Access Control rule specified as "Denied".

The ST functional requirement as mentioned above, does not allow use of the function to any Subject. As such, the ST functional requirement specifies greater restriction than the corresponding PP functional requirement.

Consequently, the SFRs of the ST are equivalent or more restrictive than SFRs of the PP.

As such:

- All TOEs that would meet the SFRs in the ST would also meet the SFRs in the PP.

In terms of the Security Assurance Requirements, the ST and PP are equivalent.

As such, this ST compared with the PP, specifies equal or greater restrictions on the TOE, and at most equal restrictions on the operational environment of the TOE.

Therefore, this ST claims demonstrable conformance to the PP.



3 Security Problem Definition

3.1 Notational conventions

- a) Defined terms in full form are set in title case (for example, "Document Storage and Retrieval").
- b) Defined terms in abbreviated form are set in all caps (for example, "DSR").
- c) In tables that describe Security Objectives rationale, a checkmark ("") placed at the intersection of a row and column indicates that the threat identified in that row is wholly or partially mitigated by the objective in that column.
- d) In tables that describe completeness of security requirements, a bold typeface letter "P" placed at the intersection of a row and column indicates that the requirement identified in that row performs a principal fulfillment of the objective indicated in that column. A letter "S" in such an intersection indicates that it performs a supporting fulfillment.
- e) In tables that describe the sufficiency of security requirements, a bold typeface requirement name and purpose indicates that the requirement performs a principal fulfillment of the objective in the same row. Requirement names and purposes set in normal typeface indicate that those requirements perform supporting fulfillments.
- f) In specifications of Security Functional Requirements (SFRs):
 - 1) **Bold** typeface indicates the portion of an SFR that has been completed or refined in this Protection Profile, relative to the original SFR definition in Common Criteria Part 2 or an Extended Component Definition.
 - 2) *Italic* typeface indicates the portion of an SFR that must be completed by the ST Author in a conforming Security Target.
 - 3) **Bold italic** typeface indicates the portion of an SFR that has been partially completed or refined in this Protection Profile, relative to the original SFR definition in Common Criteria Part 2 or an Extended Component Definition, but which also must be completed by the ST Author in a conforming Security Target.
- g) The following prefixes in Table 10 are used to indicate different entity types:

Table 10 — Notational prefix conventions

Prefix	Type of entity
U.	User
D.	Data
F.	Function
T.	Threat
P.	Policy
A.	Assumption
O.	Objective
OE.	Environmental objective
+	Security attribute

3.2 Threats agents

This security problem definition addresses threats posed by four categories of threat agents:

- a) Persons who are not permitted to use the TOE who may attempt to use the TOE
- b) Persons who are authorized to use the TOE who may attempt to use TOE functions for which they are not authorized.
- c) Persons who are authorized to use the TOE who may attempt to access data in ways for which they are not authorized.
- d) Persons who unintentionally cause a software malfunction that may expose the TOE to unanticipated threats.



The threats and policies defined in this Protection Profile address the threats posed by these threat agents.

3.3 Threats to TOE Assets

This section describes threats to assets described in clause 1.8.

Table 11 —Threats to User Data for the TOE

Threat	Affected asset	Description
T.DOC.DIS	D.DOC	User Document Data may be disclosed to unauthorized persons
T.DOC.ALT	D.DOC	User Document Data may be altered by unauthorized persons
T.FUNC.ALT	D.FUNC	User Function Data may be altered by unauthorized persons

Table 12 —Threats to TSF Data for the TOE

Threat	Affected asset	Description
T.PROT.ALT	D.PROT	TSF Protected Data may be altered by unauthorized persons
T.CONF.DIS	D.CONF	TSF Confidential Data may be disclosed to unauthorized persons
T.CONF.ALT	D.CONF	TSF Confidential Data may be altered by unauthorized persons

3.4 Organizational Security Policies for the TOE

This section describes the Organizational Security Policies (OSPs) that apply to the TOE. OSPs are used to provide a basis for Security Objectives that are commonly desired by TOE Owners in this operational environment but for which it is not practical to universally define the assets being protected or the threats to those assets.

Table 13 —Organizational Security Policies for the TOE

Name	Definition
P.USER.AUTHORIZATION	To preserve operational accountability and security, Users will be
	authorized to use the TOE only as permitted by the TOE Owner
P.SOFTWARE.VERIFICATION	To detect corruption of the executable code in the TSF, procedures will
	exist to self-verify executable code in the TSF
P.AUDIT.LOGGING	To preserve operational accountability and security, records that
	provide an audit trail of TOE use and security-relevant events will be
	created, maintained, and protected from unauthorized disclosure or
	alteration, and will be reviewed by authorized personnel
P.INTERFACE.MANAGEMENT	To prevent unauthorized use of the external interfaces of the TOE,
	operation of those interfaces will be controlled by the TOE and its IT
	environment
P.STORAGE.CRYPT*)	The data to be stored in the HDD of the TOE must be encrypted.


^{*)} It is assumed that customers will have a policy to require HDD encryption function.

3.5 Assumptions

The Security Objectives and Security Functional Requirements defined in subsequent sections of this Protection Profile are based on the condition that all of the assumptions described in this section are satisfied.

Table 14 —Assumptions

Assumption	Definition
A.ACCESS.MANAGED	The TOE is located in a restricted or monitored environment that provides
	protection from unmanaged access to the physical components and data interfaces of the TOE.





Assumption	Definition
A.USER.TRAINING	TOE Users are aware of the security policies and procedures of their
	organization, and are trained and competent to follow those policies and
	procedures.
A.ADMIN.TRAINING	Administrators are aware of the security policies and procedures of their
	organization, are trained and competent to follow the manufacturer's guidance
	and documentation, and correctly configure and operate the TOE in accordance
	with those policies and procedures.
A.ADMIN.TRUST	Administrators do not use their privileged access rights for malicious purposes.



4 Security Objectives

4.1 Security Objectives for the TOE

This section describes the Security Objectives that are satisfied by the TOE.

Table 15 — Security Objectives for the TOE

Objective	Definition
O.DOC.NO DIS	The TOE shall protect User Document Data from unauthorized
_	disclosure.
O.DOC.NO_ALT	The TOE shall protect User Document Data from unauthorized alteration.
O.FUNC.NO_ALT	The TOE shall protect User Function Data from unauthorized alteration.
O.PROT.NO_ALT	The TOE shall protect TSF Protected Data from unauthorized alteration.
O.CONF.NO_DIS	The TOE shall protect TSF Confidential Data from unauthorized
	disclosure.
O.CONF.NO_ALT	The TOE shall protect TSF Confidential Data from unauthorized
	alteration.
O.USER.AUTHORIZED	The TOE shall require identification and authentication of Users, and
	shall ensure that Users are authorized in accordance with security policies
	before allowing them to use the TOE.
O.INTERFACE.MANAGED	The TOE shall manage the operation of external interfaces in accordance
	with security policies.
O.SOFTWARE.VERIFIED	The TOE shall provide procedures to self-verify executable code in the
	TSF.
O.AUDIT.LOGGED	The TOE shall create and maintain a log of TOE use and security-relevant
	events, and prevent its unauthorized disclosure or alteration.
O.STORAGE.CRYPTED	The TOE shall encrypt the data when writing to the HDD.

4.2 Security Objectives for the IT environment

This section describes the Security Objectives for the IT environment.

Table 16 — Security Objectives for the IT environment

Objective	Definition
OE.AUDIT_STORAGE.PROTECTED	If audit records are exported from the TOE to another trusted IT
	product, the TOE Owner shall ensure that those records are
	protected from unauthorized access, deletion and modifications.
OE.AUDIT_ACCESS.AUTHORIZED	If audit records generated by the TOE are exported from the
	TOE to another trusted IT product, the TOE Owner shall ensure
	that those records can be accessed in order to detect potential
	security violations, and only by authorized persons
OE.INTERFACE.MANAGED	The IT environment shall provide protection from unmanaged
	access to TOE external interfaces.

4.3 Security Objectives for the non-IT environment

This section describes the Security Objectives for non-IT environments.

Table 17 — Security Objectives for the non-IT environment

Objective	Definition
OE.PHYSICAL.MANAGED	The TOE shall be placed in a secure or monitored area that provides
	protection from unmanaged physical access to the TOE.



Objective	Definition
OE.USER.AUTHORIZED	The TOE Owner shall grant permission to Users to be authorized to use
	the TOE according to the security policies and procedures of their
	organization.
OE.USER.TRAINED	The TOE Owner shall ensure that Users are aware of the security
	policies and procedures of their organization and have the training and
	competence to follow those policies and procedures.
OE.ADMIN.TRAINED	The TOE Owner shall ensure that TOE Administrators are aware of the
	security policies and procedures of their organization; have the training,
	competence, and time to follow the manufacturer's guidance and
	documentation; and correctly configure and operate the TOE in
	accordance with those policies and procedures.
OE.ADMIN.TRUSTED	The TOE Owner shall establish trust that TOE Administrators will not
	use their privileged access rights for malicious purposes.
OE.AUDIT.REVIEWED	The TOE Owner shall ensure that audit logs are reviewed at appropriate
	intervals for security violations or unusual patterns of activity.

4.4 Security Objectives rationale

This section demonstrates that each threat, organizational security policy and assumption is mitigated/eased by at least one security objective, and that such security objectives counter the threat, implement the security policy and support assumption.


Table 18 —Completeness of Security Objectives

										Obj	ecti	ves								
Threats. Policies, and Assumptions	O.DOC.NO DIS	O.DOC.NO ALT	O.FUNC.NO ALT	O.PROT.NO ALT	O.CONF.NO DIS	O.CONF.NO ALT	O.USER.AUTHORIZED	OE.USER.AUTHORIZED	O.SOFTWARE.VERIFIED	O.AUDIT.LOGGED	OE.AUDIT STORAGE.PROTECTED	OE.AUDIT ACCESS.AUTHORIZED	OE.AUDIT.REVIEWED	O.INTERFACE.MANAGED	O.STORAGE.CRYPTED	OE.PHYISCAL.MANAGED	OE.INTERFACE.MANAGED	OE.ADMIN.TRAINED	OE.ADMIN.TRUSTED	OE.USER.TRAINED
T.DOC.DIS	√						✓	✓												_
T.DOC.ALT		✓					✓	✓												
T.FUNC.ALT			✓				✓	✓												
T.PROT.ALT				✓			✓	✓												
T.CONF.DIS					✓		✓	✓												
T.CONF.ALT						✓	✓	✓												
P.USER.AUTHORIZATION							✓	✓												
P.SOFTWARE.VERIFICATION									✓											
P.AUDIT.LOGGING										✓	✓	✓	✓							
P.INTERFACE.MANAGEMENT														✓			✓			
P.STORAGE.CRYPT															✓					
A.ACCESS.MANAGED																✓				
A.ADMIN.TRAINING																		✓		
A.ADMIN.TRUST																			✓	
A.USER.TRAINING																				✓




Table 19 —Sufficiency of Security Objectives

Threats. Policies, and	Summary	Objectives and rationale
Assumptions	·	•
T.DOC.DIS	User Document Data may be	O.DOC.NO_DIS protects D.DOC from
	disclosed to unauthorized persons	unauthorized disclosure
	_	O.USER.AUTHORIZED establishes user
		identification and authentication as the basis for
		authorization
		OE.USER.AUTHORIZED establishes
		responsibility of the TOE Owner to
		appropriately grant authorization
T.DOC.ALT	User Document Data may be	O.DOC.NO_ALT protects D.DOC from
	altered by unauthorized persons	unauthorized alteration
		O.USER.AUTHORIZED establishes user
		identification and authentication as the basis for
		authorization
		OE.USER.AUTHORIZED establishes
		responsibility of the TOE Owner to
		appropriately grant authorization
T.FUNC.ALT	User Function Data may be	O.FUNC.NO_ALT protects D.FUNC from
	altered by unauthorized persons	unauthorized alteration
		O.USER.AUTHORIZED establishes user
		identification and authentication as the basis for
		authorization
		OE.USER.AUTHORIZED establishes
		responsibility of the TOE Owner to
		appropriately grant authorization
T.PROT.ALT	TSF Protected Data may be	O.PROT.NO_ALT protects D.PROT from
	altered by unauthorized persons	unauthorized alteration
		O.USER.AUTHORIZED establishes user
		identification and authentication as the basis for
		authorization
		OE.USER.AUTHORIZED establishes
		responsibility of the TOE Owner to
		appropriately grant authorization
T.CONF.DIS	TSF Confidential Data may be	O.CONF.NO_DIS protects D.CONF from
	disclosed to unauthorized	unauthorized disclosure
	persons	O.USER.AUTHORIZED establishes user
		identification and authentication as the basis for
		authorization
		OE.USER.AUTHORIZED establishes
		responsibility of the TOE Owner to
		appropriately grant authorization
T.CONF.ALT	TSF Confidential Data may be	O.CONF.NO_ALT protects D.CONF from
	altered by unauthorized persons	unauthorized alteration
		O.USER.AUTHORIZED establishes user
		identification and authentication as the basis for
		authorization
		OE.USER.AUTHORIZED establishes
		responsibility of the TOE Owner to
DATABLE :		appropriately grant authorization
P.USER.AUTHORIZA	Users will be authorized to use the	O.USER.AUTHORIZED establishes user
TION	TOE	identification and authentication as the basis for
		authorization to use the TOE





Threats. Policies, and	Summary	Objectives and rationale
Assumptions		
		OE.USER.AUTHORIZED establishes
		responsibility of the TOE Owner to
		appropriately grant authorization
P.SOFTWARE.VERIF	Procedures will exist to self-	O.SOFTWARE.VERIFIED provides procedures
ICATION	verify executable code in the TSF	to self-verify executable code in the TSF
P.AUDIT.LOGGING	An audit trail of TOE use and	O.AUDIT.LOGGED creates and maintains a log
	security-relevant events will be	of TOE use and security-relevant events, and
	created, maintained, protected,	prevents unauthorized disclosure or alteration
	and reviewed.	OE.AUDIT STORAGE.PROTECTED protects
		exported audit records from unauthorized access,
		deletion and modifications
		OE.AUDIT ACCESS.AUTHORIZED
		establishes responsibility of, the TOE Owner to
		provide appropriate access to exported audit
		records
		OE.AUDIT.REVIEWED establishes
		responsibility of the TOE Owner to ensure that
		audit logs are appropriately reviewed
P.INTERFACE.MAN	Operation of external interfaces	O.INTERFACE.MANAGED manages the
AGEMENT	will be controlled by the TOE and	operation of external interfaces in accordance
	its IT environment.	with security policies
		OE.INTERFACE.MANAGED establishes a
		protected environment for TOE external
		interfaces
P.STORAGE.CRYPT	Encrypts data written to the HDD.	O.STORAGE.CRYPTED encrypts data when
		writing to the HDD.
A.ACCESS.MANAG	The TOE environment provides	OE.PHYSICAL.MANAGED establishes a
ED	protection from unmanaged access	protected physical environment for the TOE
	to the physical components and	
	data interfaces of the TOE.	
A.ADMIN.TRAININ	TOE Users are aware of and	OE.ADMIN.TRAINED establishes
G	trained to follow security policies	responsibility of the TOE Owner to provide
	and procedures	appropriate Administrator training.
A.ADMIN.TRUST	Administrators do not use their	OE.ADMIN.TRUST establishes responsibility
	privileged access rights for	of the TOE Owner to have a trusted relationship
	malicious purposes.	with Administrators.
A.USER.TRAINING	Administrators are aware of and	OE.USER.TRAINED establishes responsibility
	trained to follow security policies	of the TOE Owner to provide appropriate User





5 Extended components definition (APE_ECD)

Protection Profile defines components that are extensions to Common Criteria 3.1 Revision 2, Part 2. These extended components are defined in the Protection Profile but are used in SFR Packages, and therefore, are employed only in TOEs whose STs conform to those SFR Packages.


5.1 FPT_FDI_EXP Restricted forwarding of data to external interfaces

Family behaviour:

This family defines requirements for the TSF to restrict direct forwarding of information from one external interface to another external interface.

Many products receive information on specific external interfaces and are intended to transform and process this information before it is transmitted on another external interface. However, some products may provide the capability for attackers to misuse external interfaces to violate the security of the TOE or devices that are connected to the TOE's external interfaces. Therefore, direct forwarding of unprocessed data between different external interfaces is forbidden unless explicitly allowed by an authorized administrative role. The family FPT FDI EXP has been defined to specify this kind of functionality.

Component leveling:



FPT_FDI_EXP.1 Restricted forwarding of data to external interfaces, provides for the functionality to require TSF controlled processing of data received over defined external interfaces before these data are sent out on another external interface. Direct forwarding of data from one external interface to another one requires explicit allowance by an authorized administrative role.

Management: FPT FDI EXP.1

The following actions could be considered for the management functions in FMT:

- a) Definition of the role(s) that are allowed to perform the management activities
- b) Management of the conditions under which direct forwarding can be allowed by an administrative role
- c) Revocation of such an allowance.


Audit: FPT_FDI_EXP.1

The following actions should be auditable if FAU_GEN Security Audit Data Generation is included in the PP/ST:

There are no auditable events foreseen.

Rationale:

Quite often a TOE is supposed to perform specific checks and process data received on one external interface before such (processed) data are allowed to be transferred to another external interface. Examples are firewall systems but also other systems that require a specific work flow for the incoming data before it can be





transferred. Direct forwarding of such data (i.e., without processing the data first) between different external interfaces is therefore a function that—if allowed at all—can only be allowed by an authorized role.

It has been viewed as useful to have this functionality as a single component that allows specifying the property to disallow direct forwarding and require that only an authorized role can allow this. Since this is a function that is quite common for a number of products, it has been viewed as useful to define an extended component.

The Common Criteria defines attribute-based control of User Data flow in its FDP class. However, in this Protection Profile, the authors needed to express the control of both User Data and TSF Data flow using administrative control instead of attribute-based control. It was found that using FDP_IFF and FDP_IFC for this purpose resulted in SFRs that were either too implementation-specific for a Protection Profile or too unwieldy for refinement in a Security Target. Therefore, the authors decided to define an extended component to address this functionality.

This extended component protects both User Data and TSF Data, and it could therefore be placed in either the FDP or FPT class. Since its purpose is to protect the TOE from misuse, the authors believed that it was most appropriate to place it in the FPT class. It did not fit well in any of the existing families in either class, and this lead the authors to define a new family with just one member.

FPT_FDI_EXP.1 Restricted forwarding of data to external interfaces

Hierarchical to: No other components.

Dependencies: FMT_SMF.1 Specification of Management Functions

FMT_SMR.1 Security roles.

FPT_FDI_EXP.1.1 The TSF shall provide the capability to restrict data received on [assignment: *list of external interfaces*] from being forwarded without further processing by the TSF to [assignment: *list of external interfaces*].



6 Security requirements

6.1 Security functional requirements

This section describes the security functional requirements for the TOE.

The text in brackets following the component identifier or element name denotes iteration operations.

6.1.1 User Authentication Function

FIA AFL.1 Authentication failure handling

Hierarchical to: No other components.

Dependencies: FIA_UAU.1 Timing of authentication

FIA_AFL.1.1 The TSF shall detect when [selection: [assignment: positive integer number], an administrator configurable positive integer within[assignment: range of acceptable values]] unsuccessful authentication attempts occur related to [assignment: list of authentication events].

[selection: [assignment: positive integer number], an administrator configurable positive integer within[assignment: range of acceptable values]]

- an administrator configurable positive integer within 1 to 10

[assignment: list of authentication events]

- Login attempts from the control panel or remote UIs.

FIA_AFL.1.2 When the defined number of unsuccessful authentication attempts has been [selection: *met, surpassed*], the TSF shall [assignment: *list of actions*].

[selection: *met, surpassed*]

- me

[assignment: list of actions]

- Lockout

FIA ATD.1 User attribute definition

Hierarchical to: No other components.

Dependencies: No dependencies

FIA_ATD.1.1 The TSF shall maintain the following list of security attributes belonging to individual users: [assignment: *list of security attributes*].

[assignment: list of security attributes].

- User name, role

FIA UAU.1 Timing of authentication

Hierarchical to: No other components.



Dependencies: FIA UID.1 Timing of identification

FIA_UAU.1.1 The TSF shall allow [assignment: *list of TSF-mediated actions that do not conflict with access-controlled Functions of the TOE*] on behalf of the user to be performed before the user is authenticated.

[assignment: list of TSF-mediated actions that do not conflict with access-controlled Functions of the TOE]

- Submission of print jobs, fax jobs, I-fax jobs

FIA_UAU.1.2 The TSF shall require each user to be successfully authenticated before allowing any other TSF-mediated actions on behalf of that user.

FIA UAU.7 Protected authentication feedback

Hierarchical to: No other components.

Dependencies: FIA_UAU.1 Timing of authentication

FIA_UAU .7.1 The TSF shall provide only [assignment: *list of feedback*] to the user while the authentication is in progress.

[assignment: list of feedback]

FIA_UID.1 Timing of identification

Hierarchical to: No other components.

Dependencies: No dependencies.

FIA_UID.1.1 The TSF shall allow [assignment: list of TSF-mediated actions that do not conflict with access-controlled Functions of the TOE] on behalf of the user to be performed before the user is identified.

[assignment: list of TSF-mediated actions that do not conflict with access-controlled Functions of the TOE]

- Submission of print jobs, fax jobs, I-fax jobs

FIA_UID.1.2 The TSF shall require each user to be successfully identified before allowing any other TSF-mediated actions on behalf of that user.

FIA USB.1 User-subject binding


Hierarchical to: No other components.

Dependencies: FIA ATD.1 User attribute definition

FIA_USB.1.1 The TSF shall associate the following user security attributes with subjects acting on the behalf of that user: [assignment: *list of user security attributes*].

[assignment: list of user security attributes].

- User name, role





FIA_USB.1.2 The TSF shall enforce the following rules on the initial association of user security attributes with the subjects acting on behalf of users: [assignment: *rules for the initial association of attributes*].

[assignment: rules for the initial association of attributes].

- None

FIA_USB.1.3 The TSF shall enforce the following rules governing changes to the user security attributes with the subjects acting on behalf of users: [assignment: *rules for the changing of attributes*].

[assignment: rules for the changing of attributes]

- None

FTA SSL.3(lui) TSF-initiated termination

Hierarchical to: No other components.

Dependencies: No dependencies.

FTA_SSL.3.1(lui) The TSF shall terminate an interactive session after a [assignment: *time interval of userinactivity*].

[assignment: time interval of userinactivity].

- User inactivity at the control panel lasting for the specified period of time.

FTA SSL.3(rui) TSF-initiated termination

Hierarchical to: No other components.

Dependencies: No dependencies.

FTA_SSL.3.1(rui) The TSF shall terminate an interactive session after a [assignment: *time interval of userinactivity*].

[assignment: time interval of userinactivity].

- User inactivity at the remote UI lasting for 15 minutes.

6.1.2 Function Use Restriction Function

FMT MSA.1(exec-job) Management of security attributes

Hierarchical to: No other components

Dependencies: [FDP ACC.1 Subset access control, or

FDP_IFC.1 Subset information flow control]

FMT_SMR.1 Security roles

FMT_SMF.1 Specification of Management Functions

FMT_MSA.1.1(exec-job) The TSF shall enforce the **TOE Function Access Control SFP**, [assignment: *access control SFP(s), information flow control SFP(s)*] to restrict the ability to [selection:



change_default, query, modify, delete, [assignment: other operations]] the security attributes [assignment: list of security attributes] to [assignment: the authorised identified roles].

[assignment: access control SFP(s), information flow control SFP(s)]

None

[selection: change default, query, modify, delete, [assignment: other operations]]

- query, modify, delete, create

[assignment: list of security attributes]

- Role

[assignment: the authorised identified roles].

U.ADMINISTRATOR

FMT MSA.3(exec-job) Static attribute initialisation

Hierarchical to: No other components.

Dependencies: FMT_MSA.1 Management of security attributes

FMT_SMR.1 Security roles

FMT_MSA.3.1(exec-job) The TSF shall enforce the **TOE Function Access Control Policy**, [assignment: access control SFP, information flow control SFP] to provide [selection, choose one of: restrictive, permissive, [assignment: other property]] default values for security attributes that are used to enforce the SFP.

[assignment: access control SFP, information flow control SFP]

- None

[selection, choose one of: restrictive, permissive, [assignment: other property]]

Restrictive

[refinement]

TOE Function Access Control Policy → TOE Function Access Control SFP

FMT_MSA.3.2(exec-job) The TSF shall allow the [assignment: *the authorized identified roles*] to specify alternative initial values to override the default values when an object or information is created.

[assignment: the authorized identified roles]

Nobody

FDP_ACC.1(exec-job) Subset access control

Hierarchical to: No other components.

Dependencies: FDP_ACF.1 Security attribute based access control

FDP_ACC.1.1(exec-job) The TSF shall enforce the TOE Function Access Control SFP on users as subjects, TOE functions as objects, and the right to use the functions as operations.

FDP ACF.1(exec-job) Security attribute based access control



Hierarchical to: No other components.

Dependencies: FDP ACC.1 Subset access control

FMT_MSA.3 Static attribute initialisation

FDP_ACF.1.1(exec-job) The TSF shall enforce the TOE Function Access Control SFP to objects based on the following: users and [assignment: list of TOE functions and the security attribute(s) used to determine the TOE Function Access Control SFP].

[assignment: list of TOE functions and the security attribute(s) used to determine the TOE Function Access Control SFP

- objects controlled under the TOE Function Access Control SFP in Table 20, and for each, the indicated security attributes in Table 20.

FDP_ACF.1.2(exec-job) The TSF shall enforce the following rules to determine if an operation among controlled subjects and controlled objects is allowed: [selection: the user is explicitly authorized by U.ADMINISTATOR to use a function, a user that is authorized to use the TOE is automatically authorized to use the functions [assignment: list of functions], [assignment: other conditions]].

[selection: the user is explicitly authorized by U.ADMINISTATOR to use a function, a user that is authorized to use the TOE is automatically authorized to use the functions [assignment: list of functions], [assignment: other conditions]

- [assignment: other conditions]

[assignment: other conditions]

rules specified in the TOE Function Access Control SFP in Table 20 governing access among controlled users as subjects and controlled objects using controlled operations on controlled objects

FDP_ACF.1.3(exec-job) The TSF shall explicitly authorise access of subjects to objects based on the following additional rules: **the user acts in the role U.ADMINISTRATOR**, [assignment: **other** rules, based on security attributes, that explicitly authorise access of subjects to objects].

[assignment: other rules, based on security attributes, that explicitly authorise access of subjects to objects]

- None


FDP_ACF.1.4(exec-job) The TSF shall explicitly deny access of subjects to objects based on the [assignment: rules, based on security attributes, that explicitly deny access of subjects to objects].

[assignment: rules, based on security attributes, that explicitly deny access of subjects to objects]

- None

Table 20 — TOE Function Access Control SFP

Object	Attribute	Operation(s)	Subject	Attribute	Access control rule
[Print]	+PRT	Use of the		Role	For the attribute of the Object,
		function, using	U.USER		the role associated with the
		pointer to the	U.USEK		Subject, must be authorized to
		Object.			perform the Operation.





Object	Attribute	Operation(s)	Subject	Attribute	Access control rule
		Use of the			For the attribute of the Object,
[Copy]	+CPY	function, using	U.USER	Role	the role associated with the
[Сору]	+DSR	pointer to the	O.OBER	Roic	Subject, must be authorized to
		Object.			perform the Operation.
		Use of the			For the attribute of the Object,
[Scan]	+SCN	function, using	U.USER	Role	the role associated with the
[Scan]	+DSR	pointer to the	U.USEK	Koic	Subject, must be authorized to
		Object.			perform the Operation.
		Use of the			For the attribute of the Object,
[Fax]	+FAXOUT	function, using	U.USER	Role	the role associated with the
[rax]		pointer to the	U.USEK		Subject, must be authorized to
		Object.			perform the Operation.
	+FAXIN	Use of the		Role	For the attribute of the Object,
[Fax/I-Fax Inbox]		function, using	U.USER		the role associated with the
		pointer to the	U.USER		Subject, must be authorized to
		Object.			perform the Operation.
		Use of the			For the attribute of the Object,
[Access Stored	+DSR	function, using	U.USER	Role	the role associated with the
Files]	IDSK	pointer to the	U.USEK	Koic	Subject, must be authorized to
		Object.			perform the Operation.
Remote UI [Access		Use of the			If the role associated with the
Received/Stored	+DSR	function, using	U.USER	Role	Subject is Administrator, the
Files]	+FAXIN	pointer to the	O.OBLK	Roic	Operation is permitted.
1 1100]		Object.			operation is permitted.

6.1.3 Job Output Restriction Functions

6.1.3.1 Delete Job

FMT MSA.1(delete-job) Management of security attributes

Hierarchical to: No other components

Dependencies: [FDP_ACC.1 Subset access control, or

FDP_IFC.1 Subset information flow control]

FMT_SMR.1 Security roles

FMT_SMF.1 Specification of Management Functions

FMT_MSA.1.1(delete-job) The TSF shall enforce the **Common Access Control SFP in Table 22**, [assignment: access control SFP(s), information flow control SFP(s)] to restrict the ability to [selection: change_default, query, modify, delete, [assignment: other operations]] the security attributes [assignment: list of security attributes] to [assignment: the authorised identified roles].

[assignment: access control SFP(s), information flow control SFP(s)]


- In The Job Access Control SFP in Table 23

[selection: change_default, query, modify, delete, [assignment: other operations]]

- Refer to "**Operation**" in Table 21.

[assignment: list of security attributes]

- Refer to "Security Attributes" in Table 21.





[assignment: the authorised identified roles] - Refer to "Role" in Table 21.

Table 21 —Management of security attributes

Security Attributes	Operation	Role				
User name	delete, create, query	U.ADMINISTRATOR				
Box PINs	modify, create	U.ADMINISTRATOR				
PIN of own Mail Box	modify	U.NORMAL				

FMT MSA.3(delete-job) Static attribute initialisation

Hierarchical to: No other components.

Dependencies: FMT MSA.1 Management of security attributes

FMT SMR.1 Security roles

FMT_MSA.3.1(delete-job) The TSF shall enforce the Common Access Control SFP in Table 22, [assignment: access control SFP, information flow control SFP] to provide [selection, choose one of: restrictive, permissive, [assignment: other property]] default values for security attributes that are used to enforce the SFP.

[assignment: access control SFP, information flow control SFP]

- Common Access Control SFP in Table 22
- In The Job Access Control SFP in Table 23

[selection, choose one of: restrictive, permissive, [assignment: other property]]

FMT_MSA.3.2(delete-job) The TSF shall allow the [assignment: *the authorized identified roles*] to specify alternative initial values to override the default values when an object or information is created.

[assignment: the authorized identified roles]

- Nobody

FDP ACC.1(delete-job) Subset access control

Hierarchical to: No other components.

Dependencies: FDP ACF.1 Security attribute based access control

FDP_ACC.1.1(delete-job) The TSF shall enforce the Common Access Control SFP in Table 22 on the list of users as subjects, objects, and operations among subjects and objects covered by the Common Access Control SFP in Table 22.

FDP ACF.1(delete-job) Security attribute based access control



Hierarchical to: No other components.

Dependencies: FDP ACC.1 Subset access control

FMT_MSA.3 Static attribute initialisation

FDP_ACF.1.1(delete-job) The TSF shall enforce the Common Access Control SFP in Table 22 to objects based on the following: the list of users as subjects and objects controlled under the Common Access Control SFP in Table 22, and for each, the indicated security attributes in Table 22.

FDP_ACF.1.2(delete-job) The TSF shall enforce the following rules to determine if an operation among controlled subjects and controlled objects is allowed: rules specified in the Common Access Control SFP in Table 22 governing access among controlled users as subjects and controlled objects using controlled operations on controlled objects.

FDP_ACF.1.3(delete-job) The TSF shall explicitly authorise access of subjects to objects based on the following additional rules: [assignment: rules, based on security attributes, that explicitly authorise access of subjects to objects].

[assignment: rules, based on security attributes, that explicitly authorise access of subjects to objects]

- U.ADMINISTRATOR is authorized to delete any D.DOC/D.FUNC.
- U.ADMINISTRATOR is authorized to modify any +CPY, +SCN, +DSR, +FAXOUT D.FUNC.
- **FDP_ACF.1.4(delete-job)** The TSF shall explicitly deny access of subjects to objects based on the [assignment: rules, based on security attributes, that explicitly deny access of subjects to objects].

[assignment: rules, based on security attributes, that explicitly deny access of subjects to objects]

- None

Table 22 — Common Access Control SFP

Object	Attribute	Operation(s)	Subject	Access control rule
D.DOC	+PRT,+SCN,+CPY,	Delete	U.NORMAL	Denied, except for his/her own
	+FAXOUT,			documents
	+DSR			
D.DOC	+FAXIN	Delete	U.NORMAL	Denied
D.FUNC	+PRT,+SCN,+CPY,	Modify;	U.NORMAL	Denied, except for his/her own
	+FAXOUT	Delete		function data
	+DSR			
D.FUNC	+FAXIN	Modify	U.USER	Denied
D.FUNC	+FAXIN	Delete	U.NORMAL	Denied

6.1.3.2 In The Job

FDP ACC.1(in-job) Subset access control

Hierarchical to: No other components.

Dependencies: FDP_ACF.1 Security attribute based access control



FDP_ACC.1.1(in-job) The TSF shall enforce the In The Job Access Control SFP in Table 23 on the list of subjects, objects, and operations among subjects and objects covered by the In The Job Access Control SFP in Table 23.

FDP_ACF.1(in-job) Security attribute based access control

Hierarchical to: No other components

Dependencies: FDP_ACC.1 Subset access control

FMT MSA.3 Static attribute initialisation

FDP_ACF.1.1(in-job) The TSF shall enforce the In The JOB Access Control SFP in Table 23 to objects based on the following: the list of subjects and objects controlled under the In The JOB Access Control SFP in Table 23, and for each, the indicated security attributes in Table 23.

FDP_ACF.1.2(in-job) The TSF shall enforce the following rules to determine if an operation among controlled subjects and controlled objects is allowed: rules specified in the In The Job Access Control SFP in Table 23 governing access among Users and controlled objects using controlled operations on controlled objects.

FDP_ACF.1.3(in-job) The TSF shall explicitly authorise access of subjects to objects based on the following additional rules: [assignment: rules, based on security attributes, that explicitly authorise access of subjects to objects].

[assignment: rules, based on security attributes, that explicitly authorise access of subjects to objects]

U.ADMINISTRATOR is authorized to read any +FAXIN/+DSR D.DOC

FDP_ACF.1.4(in-job) The TSF shall explicitly deny access of subjects to objects based on the [assignment: rules, based on security attributes, that explicitly deny access of subjects to objects].

[assignment: rules, based on security attributes, that explicitly deny access of subjects to objects]

None


Table 23 —In The Job Access Control SFP

Object	Attribute(s)	Operation	Subject	Access control rule
D.DOC	+PRT	Read	U.USER	Denied, except for his/her own documents
D.DOC	+SCN	Read	U.USER	Denied, except for his/her own documents
D.DOC	+CPY	Read	U.USER	Denied
D.DOC	+FAXIN	Read	U.NORMAL	Denied
D.DOC	+FAXOUT	Read	U.USER	Denied, except for his/her own documents
D.DOC	+DSR	Read	U.NORMAL	Denied, except for his/her own documents

6.1.4 Forward Received Jobs Function

FPT FDI EXP.1 Restricted forwarding of data to external interfaces

Hierarchical to: No other components.





Dependencies: FMT_SMF.1 Specification of Management Functions FMT SMR.1 Security roles.

FPT_FDI_EXP.1.1 The TSF shall provide the capability to restrict data received on any external Interface from being forwarded without further processing by the TSF to any Shared-medium Interface.

6.1.5 HDD Data Erase Function

FDP RIP.1 Subset residual information protection

Hierarchical to: No other components.

Dependencies: No dependencies

FDP_RIP.1.1 The TSF shall ensure that any previous information content of a resource is made unavailable upon the [selection: allocation of the resource to, deallocation of the resource from] the following objects: **D.DOC**, [assignment: list of objects].

[selection: allocation of the resource to, deallocation of the resource from]

- deallocation of the resource from

[assignment: *list of objects*] - None

6.1.6 HDD Data Encryption Function

6.1.6.1 Encryption/Decryption Function

FCS COP.1(h) Cryptographic operation

Hierarchical to: No other components.

Dependencies: [FDP_ITC.1 Import of user data without security attributes, or

FDP_ITC.2 Import of user data with security attributes, or

FCS_CKM.1 Cryptographic key generation FCS_CKM.4 Cryptographic key destruction

FCS_COP.1.1(h) The TSF shall perform [assignment: *list of cryptographic operations*] in accordance with a specified cryptographic algorithm [assignment: *cryptographic algorithm*] and cryptographic key sizes [assignment: *cryptographic key sizes*] that meet the following: [assignment: *list of standards*].

[assignment: list of cryptographic operations]

Encryption of data written to the HDD

- Decryption of data read out from the HDD


[assignment: cryptographic algorithm]

- AES

[assignment: cryptographic key sizes]

- 256 bit

[assignment: list of standards]





FIPS PUB 197

6.1.7 LAN Data Protection Function

6.1.7.1 IP Packet Encryption Function

FCS COP.1(n) Cryptographic operation

Hierarchical to: No other components.

Dependencies: [FDP_ITC.1 Import of user data without security attributes, or

FDP ITC.2 Import of user data with security attributes, or

FCS_CKM.1 Cryptographic key generation FCS_CKM.4 Cryptographic key destruction

FCS_COP.1.1(n) The TSF shall perform [assignment: *list of cryptographic operations*] in accordance with a specified cryptographic algorithm [assignment: *cryptographic algorithm*] and cryptographic key sizes [assignment: *cryptographic key sizes*] that meet the following: [assignment: *list of standards*].

[assignment: list of cryptographic operations]

- Encryption of IP packets sent to the LAN

Decryption of IP packets received from the LAN

[assignment: cryptographic algorithm]

- Refer to "*cryptographic algorithm*" in Table 24.

[assignment: cryptographic key sizes]

- Refer to "cryptographic key sizes" in Table 24.

[assignment: *list of standards*]

- Refer to "list of standards" in Table 24.

Table 24 — IPSec cryptographic algorithm, key sizes and standards

cryptographic algorithm	cryptographic key sizes	list of standards
3DES-CBC	168 bit	FIPS PUB 46-3
AES-CBC	128 bit, 192bit, 256 bit	FIPS PUB 197
AES-GCM	128 bit, 192bit, 256 bit	SP800-38D

FTP ITC.1 Inter-TSF trusted channel

Hierarchical to: No other components.

Dependencies: No dependencies.

FTP_ITC.1.1 The TSF shall provide a communication channel between itself and another trusted IT product that is logically distinct from other communication channels and provides assured identification of its end points and protection of the communicated data from modification or disclosure.

FTP_ITC.1.2 The TSF shall permit the TSF, another trusted IT product to initiate communication via the trusted channel.

Date of Issue: 2017/03/21



FTP_ITC.1.3 The TSF shall initiate communication via the trusted channel for communication of D.DOC, D.FUNC, D.PROT, and D.CONF over any Shared-medium Interface.

6.1.8 Self-Test Function

FPT TST.1 TSF testing

Hierarchical to: No other components

Dependencies: No dependencies

FPT_TST.1.1 The TSF shall run a suite of self tests [selection: during initial start-up, periodically during normal operation, at the request of the authorised user, at the conditions [assignment: conditions under which self test should occur]] to demonstrate the correct operation of [selection: [assignment: parts of TSF], the TSF].

[selection: during initial start-up, periodically during normal operation, at the request of the authorised user, at the conditions [assignment: conditions under which self test should occur]]

during initial start-up

[selection: [assignment: parts of TSF], the TSF]

- Cryptographic algorithms used with the LAN Data Protection Function (AES, 3DES)

FPT_TST.1.2 The TSF shall provide authorised users with the capability to verify the integrity of [selection: [assignment: *parts of TSF*], *TSF Data*].

[selection: [assignment: parts of TSF], TSF Data]

• [assignment: parts of TSF]

[assignment: parts of TSF]

Audit log

FPT_TST.1.3 The TSF shall provide authorised users with the capability to verify the integrity of stored TSF executable code.


6.1.9 Audit Log Function

FAU GEN.1 Audit data generation

Hierarchical to: No other components.

Dependencies: FPT_STM.1 Reliable time stamps

- **FAU_GEN.1.1** The TSF shall be able to generate an audit record of the following auditable events:
 - a) Start-up and shutdown of the audit functions;
 - b) All auditable events for the [selection, choose one of: *minimum, basic, detailed, not specified*] level of audit; and





c) All Auditable Events as each is defined for its Audit Level (if one is specified) for the **Relevant SFR in Table 25**; [assignment: *other specifically defined auditable events*].

[selection, choose one of: minimum, basic, detailed, not specified]

not specified

[assignment: other specifically defined auditable events]

FAU GEN.1.2 The TSF shall record within each audit record at least the following information:

- Date and time of the event, type of event, subject identity (if applicable), and the outcome (success or failure) of the event; and
- b) For each audit event type, based on the auditable event definitions of the functional components included in the PP/ST, for each Relevant SFR listed in Table 25: (1) information as defined by its Audit Level (if one is specified), and (2) all Additional **Information (if any is required);** [assignment: other audit relevant information].

[assignment: other audit relevant information]

None

Table 25 —Audit data requirements

Auditable event	Relevant SFR	Audit level	Additional
			information
Job completion	FDP_ACF.1	Not specified	Type of job
Both successful and unsuccessful use of the	FIA_UAU.1	Basic	None required
authentication mechanism			
Both successful and unsuccessful use of the	FIA_UID.1	Basic	Attempted user
identification mechanism			identity, if available
Use of the management functions	FMT_SMF.1	Minimum	None required
Modifications to the group of users that are	FMT_SMR.1	Minimum	None required
part of a role			
Changes to the time	FPT_STM.1	Minimum	None required
Termination of an interactive session by the	FTA_SSL.3	Minimum	None required
session locking mechanism ⁴			
Failure of the trusted channel functions	FTP_ITC.1	Minimum	None required

FAU GEN.2 User identity association

Hierarchical to: No other components.

Dependencies: FAU GEN.1 Audit data generation

FIA UID.1 Timing of identification

FAU GEN.2.1 For audit events resulting from actions of identified users, the TSF shall be able to associate each auditable event with the identity of the user that caused the event.

In IEEE Std 2600.1, this is indicated as "Locking of an interactive session by the session locking mechanism" but notes that this is a transcription error.

Copyright CANON INC 2016

⁴ See "Section 14.1 IEEE Std 2600.1 Errata" in the PP Guide.

Date of Issue: 2017/03/21



FPT STM.1 Reliable time stamps

Hierarchical to: No other components.

Dependencies: No dependencies.

FPT STM.1.1 The TSF shall be able to provide reliable time stamps.

FAU SAR.1 Audit review

Hierarchical to: No other components.

Dependencies: FAU_GEN.1 Audit data generation

FAU_SAR.1.1 The TSF shall provide [assignment: *authorised users*] with the capability to read [assignment: *list of audit information*] from the audit records.

[assignment: authorised users]

- U.ADMINISTRATOR

[assignment: list of audit information]

- Refer to the audit logs listed in Table 25.

FAU_SAR.1.2 The TSF shall provide the audit records in a manner suitable for the user to interpret the information.

FAU SAR.2 Restricted audit review

Hierarchical to: No other components.

Dependencies: FAU_SAR.1 Audit review

FAU_SAR.2.1 The TSF shall prohibit all users read access to the audit records, except those users that have been granted explicit read-access.

FAU STG.1 Protected audit trail storage

Hierarchical to: No other components.

Dependencies: FAU_GEN.1 Audit data generation


FAU STG.1.1 The TSF shall protect the stored audit records in the audit trail from unauthorised deletion.

FAU_STG.1.2 The TSF shall be able to [selection, choose one of: *prevent, detect*] unauthorised modifications to the stored audit records in the audit trail.

[selection, choose one of: prevent, detect]

prevent

FAU STG.4 Prevention of audit data loss





Hierarchical to: FAU STG.3 Action in case of possible audit data loss

Dependencies: FAU STG.1 Protected audit trail storage

FAU_STG.4.1 The TSF shall [selection, choose one of: "ignore audited events," "prevent audited events, except those taken by the authorised user with special rights," "overwrite the oldest stored audit records] and [assignment: other actions to be taken in case of audit storage failure] if the audit trail is full.

[selection, choose one of: "ignore audited events," "prevent audited events, except those taken by the authorised user with special rights," "overwrite the oldest stored audit records]"

- "overwrite the oldest stored audit records"

[assignment: other actions to be taken in case of audit storage failure]

- None

6.1.10 Management Function

6.1.10.1 User Management Function

FIA_SOS.1 Verification of secrets

Hierarchical to: No other components.

Dependencies: No dependencies

FIA_SOS.1.1 The TSF shall provide a mechanism to verify that secrets meet [assignment: *a defined quality metric*].

[assignment: a defined quality metric]

- Use a password 4 to 32 characters in length
- Prohibit the use of 3 or more consecutive characters
- Use at least one uppercase character (A to Z)
- Use at least one lowercase character (a to z)
- Use at least one number (0-9)
- Use at least one non-alphabet characters ($^-(@[]::,./¥!"#$\%&'()=\sim|{^+*}|?><)$
- Allowed characters
 - All characters other than control characters

FMT_MTD.1(user-mgt) Management of TSF Data


Hierarchical to: No other components.

Dependencies: FMT_SMR.1 Security roles

FMT SMF.1 Specification of Management Functions

FMT_MTD.1.1 (user-mgt) The TSF shall restrict the ability to [selection: change_default, query, modify, delete, clear, [assignment: other operations]] the [assignment: list of TSF Data associated with a U.NORMAL or TSF Data associated with documents or jobs owned by a U.NORMAL] to [selection, choose one of: Nobody, [selection: U.ADMINISTRATOR, the U.NORMAL to whom such TSF Data are associated]].

[selection: change default, query, modify, delete, clear, [assignment: other operations]]





- Refer to "Operation" in Table 26.

[assignment: list of TSF Data associated with a U.NORMAL or TSF Data associated with documents or jobs owned by a U.NORMAL]

- Refer to "TSF Data" in Table 26.

[selection, choose one of: Nobody, [selection: U.ADMINISTRATOR, the U.NORMAL to whom such TSF Data are associated]]

- Refer to "Role" in Table 26.

Table 26 — User information management

TSF Data	Role	Operation
User name	U.ADMINISTRATOR	delete, create, query
Role	U.ADMINISTRATOR	modify, delete, create, query
Passwords	U.ADMINISTRATOR	modify, delete, create
Own password	U.NORMAL	modify

FMT SMR.1 Security roles

Hierarchical to: No other components.

Dependencies: FIA_UID.1 Timing of identification

FMT_SMR.1.1 The TSF shall maintain the roles U.ADMINISTRATOR, U.NORMAL, [selection: *Nobody*, [assignment: *the authorised identified roles*]].

[selection: *Nobody*, [assignment: the authorised identified roles]]
- Nobody

FMT_SMR.1.2 The TSF shall be able to associate users with roles, except for the role "Nobody" to which no user shall be associated.

6.1.10.2 Cryptographic Key Management Function

FCS_CKM.1(h) Cryptographic key generation

Hierarchical to: No other components.

Dependencies: [FCS_CKM.2 Cryptographic key distribution, or

FCS_COP.1 Cryptographic operation]
FCS_CKM.4 Cryptographic key destruction

FCS_CKM.1.1(h) The TSF shall generate cryptographic keys in accordance with a specified cryptographic key generation algorithm [assignment: cryptographic key generation algorithm] and specified cryptographic key sizes [assignment: cryptographic key sizes] that meet the following: [assignment: list of standards].


[assignment: cryptographic key generation algorithm]

- Random number generation algorithm according to SP800-90A using Hash_DRBG

[assignment: cryptographic key sizes]

- 256 bit

[assignment: list of standards]
- Not specified





FCS CKM.1(n) Cryptographic key generation

Hierarchical to: No other components.

Dependencies: [FCS_CKM.2 Cryptographic key distribution, or

FCS_COP.1 Cryptographic operation FCS_CKM.4 Cryptographic key destruction

FCS_CKM.1.1(n) The TSF shall generate cryptographic keys in accordance with a specified cryptographic key generation algorithm [assignment: cryptographic key generation algorithm] and specified cryptographic key sizes [assignment: cryptographic key sizes] that meet the following: [assignment: list of standards].

[assignment: *cryptographic key generation algorithm*]

- Cryptographic key generation algorithm according to FIPS PUB 186-2

[assignment: cryptographic key sizes]

- 128bit, 168bit, 192bit, 256 bit

[assignment: *list of standards*] - FIPS PUB 186-2

FCS CKM.2 Cryptographic key distribution

Hierarchical to: No other components.

Dependencies: [FDP_ITC.1 Import of user data without security attributes, or

FDP ITC.2 Import of user data with security attributes, or

FCS_CKM.1 Cryptographic key generation FCS_CKM.4 Cryptographic key destruction

FCS_CKM.2.1 The TSF shall distribute cryptographic keys in accordance with a specified cryptographic key distribution method [assignment: *cryptographic key distribution method*] that meets the following: [assignment: *list of standards*].

[assignment: cryptographic key distribution method]

DH (Diffie Hellman) and ECDH (Elliptic Curve Diffie Hellman)

[assignment: *list of standards*] - SP800-56A

6.1.10.3 Device Management Function

FMT_MTD.1(device-mgt) Management of TSF Data

Hierarchical to: No other components

Dependencies: FMT SMR.1 Security roles

FMT_SMF.1 Specification of Management Functions

FMT_MTD.1.1(device-mgt) The TSF shall restrict the ability to [selection: *change_default, query, modify, delete, clear, [assignment: other operations]*] the [assignment: *list of TSF data*] to



[selection, choose one of: *Nobody*, [selection: *U.ADMINISTRATOR*, [assignment: the authorized identified roles except *U.NORMAL*]]].

[selection: change_default, query, modify, delete, clear, [assignment: other operations]]

- Refer to "Operation" in Table 27.

[assignment: list of TSF data]

- Refer to "TSF Data Table 27.

[selection, choose one of: *Nobody*, [selection: *U.ADMINISTRATOR*, [assignment: the authorized identified roles except *U.NORMAL*]]]

- Refer to "Role" in Table 27.

Table 27 — Device management function

TSF Data	Role	Operation
Date/Time settings	U.ADMINISTRATOR	modify
HDD Data Erase settings	U.ADMINISTRATOR	query, modify
IPSec settings	U.ADMINISTRATOR	query, modify
Auto Reset settings	U.ADMINISTRATOR	query, modify
Lockout policy settings	U.ADMINISTRATOR	query, modify
Password policy settings	U.ADMINISTRATOR	query, modify
Audit log	U.ADMINISTRATOR	query, delete

FMT_SMF.1 Specification of Management Functions

Hierarchical to: No other components.

Dependencies: No dependencies.

FMT_SMF.1.1 The TSF shall be capable of performing the following management functions: [assignment: list of management functions to be provided by the TSF].

[assignment: list of management functions to be provided by the TSF]

- Refer to "Management Function" in Table 28.

Table 28 —The management of security requirements

Management Function	Operation
Date/Time settings	modify
HDD Data Erase settings	query, modify
IPSec settings	query, modify
Auto Reset settings	query, modify
Lockout policy settings	query, modify
Password policy settings	query, modify
Audit log	query, delete
Username	delete, create, query
Role	modify, delete, create, query
Password	modify, delete, create
Box PIN	modify, create
Own password	modify
PIN of own Mail Box	modify



6.2 Security Assurance Requirements

Table 29 lists the Security Assurance Requirements for 2600.2-PP, Protection Profile for Hardcopy Devices, Operational Environment B, and related SFR Packages, EAL 2 augmented by ALC FLR.2.

Table 29 — IEEE 2600.2 Security Assurance Requirements

Assurance class	Assurance components
ADV: Development	ADV_ARC.1 Security architecture description
	ADV_FSP.2 Security-enforcing functional specification
	ADV_TDS.1 Basic design
AGD: Guidance documents	AGD_OPE.1 Operational user guidance
	AGD_PRE.1 Preparative procedures
ALC: Life-cycle support	ALC_CMC.2 Use of a CM system
	ALC_CMS.2 Parts of the TOE CM coverage
	ALC_DEL.1 Delivery procedures
	ALC_FLR.2 Flaw reporting procedures (augmentation of EAL2)
ASE: Security Target evaluation	ASE_CCL.1 Conformance claims
	ASE_ECD.1 Extended components definition
	ASE_INT.1 ST introduction
	ASE_OBJ.2 Security objectives
	ASE_REQ.2 Derived security requirements
	ASE_SPD.1 Security problem definition
	ASE_TSS.1 TOE summary specification
ATE: Tests	ATE_COV.1 Evidence of coverage
	ATE_FUN.1 Functional testing
	ATE_IND.2 Independent testing - sample
AVA: Vulnerability assessment	AVA_VAN.2 Vulnerability analysis

6.3 Security functional requirements rationale

6.3.1 The completeness of security requirements

Table 30 provides a mapping of TOE Security Objectives and security functional requirements. This shows how each of the security functional requirements corresponds to at least one TOE Security Objective. **Bold typeface** items provide principal (P) fulfillment of the objectives, and normal typeface items provide supporting (S) fulfillment.



Table 30 —The completeness of security requirements

	Objectives										
SFRs	O.DOC.NO_DIS	O.DOC.NO_ALT	O.FUNC.NO_ALT	O.PROT.NO_ALT	O.CONF.NO_DIS	O.CONF.NO_ALT	O.USER.AUTHORIZED	O.INTERFACE.MANAGED	O.SOFTWARE.VERIFIED	O.AUDIT.LOGGED	O.STORAGE.CRYPTED
FIA_AFL.1							S				
FIA_ATD.1							S	В			
FIA_UAU.1							P	P			
FIA_UAU.7	0	C	C	C	0	0	S	В		0	
FIA_UID.1	S	S	S	S	S	S	P	P		S	
FIA_USB.1							P	В			
FTA_SSL.3(lui)							P	P			
FTA_SSL.3(rui)							P	P			
FMT_MSA.1(exec-job)							S				
FMT_MSA.3(exec-job)							S				
FDP_ACC.1(exec-job)							P				
FDP_ACF.1(exec-job)	~	~	~				S				
FMT_MSA.1(delete-job)	S	S	S								
FMT_MSA.3(delete-job)	S	S	S								
FDP_ACC.1(delete-job)	P	P	P								
FDP_ACF.1(delete-job)	S	S	S								
FDP_ACC.1(in-job)	P										
FDP_ACF.1(in-job)	S										
FPT_FDI_EXP.1								P			
FDP_RIP.1	P										
FCS_COP.1(h)	S				S						P
FCS_COP.1(n)	S	S	S	S	S	S					
FTP_ITC.1	P	P	P	P	P	P					
FCS_CKM.1(h)	S				S						P
FCS_CKM.1(n)	S	S	S	S	S	S					
FCS_CKM.2	S	S	S	S	S	S					
FPT_TST.1									P		
FAU_GEN.1										P	
FAU_GEN.2										P	
FAU_SAR.1										P	
FAU_SAR.2										P	
FAU_STG.1										P	
FAU_STG.4										P	
FPT_STM.1										S	
FIA_SOS.1							S				
FMT_MTD.1(user-mgt)				P	P	P					
FMT_SMR.1	S	S	S	S	S	S	S				
FMT_MTD.1(device-mgt)				P	P	P					
FMT_SMF.1	S	S	S	S	S	S					



6.3.2 The sufficiency of security requirements

This section provides the rationale on how the security functional requirements are sufficient to satisfy the Security Objectives.

O.DOC.NO_DIS is the security objective that ensures user document data is protected from unauthorized disclosure. O.DOC.NO DIS is addressed by the following:

Based on user identification information resulting from FIA_UID.1, roles managed by FMT_SMR.1 are assigned for access control.

The identified users are allowed to cancel only his/her own job according to FMT_MSA.1(delete-job)/FMT_MSA.3(delete-job), FDP_ACC.1(delete-job)/FDP_ACF.1(delete-job).

The identified users are allowed to access only his/her own document data in print job, according to FDP_ACC.1(in-job)/FDP_ACF.1(in-job), and Nobody is allowed to access any document data in other job types.

Furthermore, by FDP_RIP.1, complete deletion of residual information of user document data created as a result of job processing is ensured. By FCS_COP.1(h) and FCS_CKM.1(h), User Data and TSF Data in the HDD are protected from unauthorized disclosure. By FCS_COP.1(n), FTP_ITC.1, FCS_CKM.1(n), and FCS_CKM.2, User Data and TSF Data sent over the LAN are protected from unauthorized alteration and disclosure. By FMT_SMF.1, management functions related to these actions, are provided.

O.DOC.NO_ALT is the security objective that ensures protection of user document data from unauthorized alteration. O.DOC.NO_ALT is addressed by the following:

Based on user identification information resulting from FIA_UID.1, roles managed by FMT_SMR.1 are assigned for access control.

The identified users are allowed to operate only his/her own job according to FMT_MSA.1(delete-job)/FMT_MSA.3(delete-job), FDP_ACC.1(delete-job)/FDP_ACF.1(delete-job).

Furthermore, by FCS_COP.1(n), FTP_ITC.1, FCS_CKM.1(n), and FCS_CKM.2, User Data and TSF Data sent over the LAN are protected from unauthorized alteration and disclosure. By FMT_SMF.1, management functions related to these actions, are provided.

O.FUNC.NO_ALT is the security objective that ensures protection of user function data from unauthorized alteration. O.FUNC.NO ALT is addressed by the following:

Based on user identification information resulting from FIA_UID.1, roles managed by FMT_SMR.1 are assigned for access control.

The identified users are allowed to operate only his/her own job according to FMT_MSA.1(delete-job)/FMT_MSA.3(delete-job), FDP_ACC.1(delete-job)/FDP_ACF.1(delete-job).

Furthermore, by FCS_COP.1(n), FTP_ITC.1, FCS_CKM.1(n), and FCS_CKM.2, User Data and TSF Data sent over the LAN are protected from unauthorized alteration and disclosure. By FMT_SMF.1, management functions related to these actions, are provided.


O.PROT.NO_ALT is the security objective that ensures protection of TSF protected data from unauthorized alteration. O.PROT.NO_ALT is addressed by the following:

Based on user identification information managed by FMT_MTD.1(user-mgt) and resulting from FIA_UID.1, roles managed by FMT_SMR.1 are assigned for the Device Management function as specified by FMT_SMR.1, FMT_MTD.1(device-mgt), and FMT_SMF.1.

Furthermore, by FCS_COP.1(n), FTP_ITC.1, FCS_CKM.1(n), and FCS_CKM.2, User Data and TSF Data sent over the LAN are protected from unauthorized alteration and disclosure.

O.CONF.NO_DIS is the security objective that ensures protection of TSF confidential data from unauthorized disclosure. O.CONF.NO_DIS is addressed by the following:

Based on user identification information managed by FMT_MTD.1(user-mgt) and resulting from FIA_UID.1, roles managed by FMT_SMR.1 are assigned for the Device Management function as specified by FMT_SMR.1, FMT_MTD.1(device-mgt), and FMT_SMF.1.





Furthermore, by FCS_COP.1(h) and FCS_CKM.1(h), User Data and TSF Data in the HDD are protected from unauthorized disclosure. By FCS_COP.1(n), FTP_ITC.1, FCS_CKM.1(n), and FCS_CKM.2, User Data and TSF Data sent over the LAN are protected from unauthorized alteration and disclosure.

O.CONF.NO_ALT is the security objective that ensures protection of TSF confidential data from unauthorized alteration. O.CONF.NO ALT is addressed by the following:

Based on user identification information managed by FMT_MTD.1(user-mgt) and resulting from FIA_UID.1, roles managed by FMT_SMR.1 are assigned for the Device Management function as specified by FMT_SMR.1, FMT_MTD.1(device-mgt), and FMT_SMF.1.

Furthermore, by FCS_COP.1(n), FTP_ITC.1, FCS_CKM.1(n), and FCS_CKM.2, User Data and TSF Data sent over the LAN are protected from unauthorized alteration and disclosure.

O.USER.AUTHORIZED is the security objective that ensures user identification and authentication. O.USER.AUTHORIZED is addressed by the following:

Users authenticated by the identification and authentication mechanism specified by FIA_UAU.1, FIA_UID.1, FIA_UAU.7, and FIA_AFL.1, with user sessions managed by FIA_ATD.1, FIA_USB.1, and FTA_SSL.3(lui)/FTA_SSL.3(rui), are granted use of the function, as determined by access control specified by FDP_ACC.1(exec-job)/FDP_ACF.1(exec-job).

Furthermore, authorized user information are managed by FIA_SOS.1, FMT_MSA.1(exec-job), FMT_MSA.3(exec-job), and FMT_SMR.1.

O.INTERFACE.MANAGED is the security objective that ensures control of operations of the I/O interfaces in accordance with security policy. O.INTERFACE.MANAGED is addressed by the following: By FIA_UAU.1, FIA_UID.1, FTA_SSL.3(lui)/FTA_SSL.3(rui), the user interface is managed. By FPT FDI EXP.1, restricted forwarding of data to the LAN is specified.

O.SOFTWARE. VERIFIED is addressed by providing the self-test procedures specified by FPT TST.1.

O.AUDIT.LOGGED is addressed by providing the Audit Log function as specified by FAU_GEN.1, FAU_GEN.2, FAU_SAR.1, FAU_SAR.2, FAU_STG.1, and FAU_STG.4. FIA_UID.1 and FPT_STM.1 provide the means for user information and timestamps generated on audit logs.

O.STORAGE.CRYPTED is addressed by providing the Encryption/Decryption function of FCS_COP.1(h) and Cryptographic Key Management function of FCS_CKM.1(h)

6.3.3 The dependencies of security requirements


This section provides the justification for any dependencies not met.

Table 31 —The dependencies of security requirements

Functional Requirement	Dependencies required by CC	Dependencies satisfied by ST	Reason for not meeting dependencies
FIA_AFL.1	FIA_UAU.1	FIA_UAU.1	N/A (dependencies are satisfied)
FIA_ATD.1	No dependencies.	No dependencies.	N/A (no dependencies)
FIA_UAU.1	FIA_UID.1	FIA_UID.1	N/A (dependencies are satisfied)
FIA_UAU.7	FIA_UAU.1	FIA_UAU.1	N/A (dependencies are satisfied)
FIA_UID.1	No dependencies.	No dependencies.	N/A (no dependencies)
FIA_USB.1	FIA_ATD.1	FIA_ATD.1	N/A (dependencies are satisfied)
FTA_SSL.3(lui)	No dependencies.	No dependencies.	N/A (no dependencies)
FTA_SSL.3(rui)	No dependencies.	No dependencies.	N/A (no dependencies)
FMT_MSA.1(exec-job)	[FDP_ACC.1 or FDP_IFC.1] FMT_SMR.1 FMT_SMF.1	FDP_ACC.1(exec-job) FMT_SMR.1 FMT_SMF.1	N/A (dependencies are satisfied)



Functional Requirement	Dependencies required by CC	Dependencies satisfied by ST	Reason for not meeting dependencies
FMT_MSA.3(exec-job)	FMT_MSA.1 FMT_SMR.1	FMT_MSA.1(exec-job) FMT_SMR.1	N/A (dependencies are satisfied)
FDP_ACC.1(exec-job)	FDP_ACF.1	FDP_ACF.1(exec-job)	N/A (dependencies are satisfied)
FDP_ACF.1(exec-job)	FDP_ACC.1 FMT_MSA.3	FDP_ACC.1(exec-job) FMT_MSA.3(exec-job)	N/A (dependencies are satisfied)
FMT_MSA.1(delete-job)	[FDP_ACC.1 or FDP_IFC.1] FMT_SMR.1 FMT_SMF.1	FDP_ACC.1(delete-job) FMT_SMR.1 FMT_SMF.1	N/A (dependencies are satisfied)
FMT_MSA.3(delete-job)	FMT_MSA.1 FMT_SMR.1	FMT_MSA.1(delete-job) FMT_SMR.1	N/A (dependencies are satisfied)
FDP_ACC.1(delete-job)	FDP_ACF.1	FDP_ACF.1(delete-job)	N/A (dependencies are satisfied)
FDP_ACF.1(delete-job)	FDP_ACC.1 FMT_MSA.3	FDP_ACC.1(delete-job) FMT_MSA.3(delete-job)	N/A (dependencies are satisfied)
FDP_ACC.1(in-job)	FDP_ACF.1	FDP_ACF.1(in-job)	N/A (dependencies are satisfied)
FDP_ACF.1(in-job)	FDP_ACC.1 FMT_MSA.3	FDP_ACC.1(in-job) FMT_MSA.3(delete-job)	N/A (dependencies are satisfied)
FPT_FDI_EXP.1	FMT_SMF.1 FMT_SMR.1	FMT_SMF.1 FMT_SMR.1	N/A (dependencies are satisfied)
FDP_RIP.1	No dependencies.	No dependencies.	N/A (no dependencies)
FCS_COP.1(h)	[FDP_ITC.1 or FDP_ITC.2 or FCS_CKM.1(h)] FCS_CKM.4	FCS_CKM.1(h)	FCS_CKM.4 is not claimed because: Cryptographic keys are stored in RAM, and disappear when power is shut off. Also, extraction of cryptographic keys is prevented by the design of the system. As such, cryptographic keys are managed securely enough not to require any method for their destruction.
FTP_ITC.1	No dependencies.	No dependencies.	N/A (no dependencies)
FCS_COP.1(n)	[FDP_ITC.1 or FDP_ITC.2 or FCS_CKM.1(n)] FCS_CKM.4	FCS_CKM.1(n)	FCS_CKM.4 is not claimed because: Cryptographic keys are stored in RAM, and disappear when power is shut off. Also, extraction of cryptographic keys is prevented by the design of the system. As such, cryptographic keys are managed securely enough not to require any method for their destruction.
FCS_CKM.1(h)	FCS_COP.1 FCS_CKM.4	FCS_COP.1(h)	FCS_CKM.4 is not claimed because: Cryptographic keys are stored in RAM, and disappear when power is shut off. Also, extraction of cryptographic keys is prevented by the design of the system. As such, cryptographic keys are managed securely enough not to require any method for their destruction.
FCS_CKM.1(n)	[FCS_CKM.2 or FCS_COP.1(n)] FCS_CKM.4	FCS_COP.1(n)	FCS_CKM.4 is not claimed because: Cryptographic keys are stored in RAM, and disappear when power is shut off. Also, extraction of cryptographic keys is prevented by the design of the system. As such, cryptographic keys are managed securely enough not to require any method for their destruction.






Functional Requirement	Dependencies required by CC	Dependencies satisfied by ST	Reason for not meeting dependencies
FCS_CKM.2	[FDP_ITC.1 or FDP_ITC.2 or FCS_CKM.1(n)] FCS_CKM.4	FCS_CKM.1(n)	FCS_CKM.4 is not claimed because: Cryptographic keys are stored in RAM, and disappear when power is shut off. Also, extraction of cryptographic keys is prevented by the design of the system. As such, cryptographic keys are managed securely enough not to require any method for their destruction.
FPT_TST.1	No dependencies.	No dependencies.	N/A (no dependencies)
FAU_GEN.1	FPT_STM.1	FPT_STM.1	N/A (dependencies are satisfied)
FAU_GEN.2	FAU_GEN.1 FIA_UID.1	FAU_GEN.1 FIA_UID.1	N/A (dependencies are satisfied)
FPT_STM.1	No dependencies.	No dependencies.	N/A (no dependencies)
FAU_SAR.1	FAU_GEN.1	FAU_GEN.1	N/A (dependencies are satisfied)
FAU_SAR.2	FAU_SAR.1	FAU_SAR.1	N/A (dependencies are satisfied)
FAU_STG.1	FAU_GEN.1	FAU_GEN.1	N/A (dependencies are satisfied)
FAU_STG.4	FAU_STG.1	FAU_STG.1	N/A (dependencies are satisfied)
FIA_SOS.1	No dependencies.	No dependencies.	N/A (no dependencies)
FMT_MTD.1(user-mgt)	FMT_SMR.1 FMT_SMF.1	FMT_SMR.1 FMT_SMF.1	N/A (dependencies are satisfied)
FMT_SMR.1	FIA_UID.1	FIA_UID.1	N/A (dependencies are satisfied)
FMT_MTD.1(devicemgt)	FMT_SMR.1 FMT_SMF.1	FMT_SMR.1 FMT_SMF.1	N/A (dependencies are satisfied)
FMT_SMF.1	No dependencies.	No dependencies.	N/A (no dependencies)

6.4 Security assurance requirements rationale

This Protection Profile has been developed for Hardcopy Devices to be used in commercial information processing environments that require a moderate level of document security, network security, and security assurance. The TOE will be exposed to only a low level of risk because it is assumed that the TOE will be located in a restricted or monitored environment that provides almost constant protection from unauthorized and unmanaged access to the TOE and its data interfaces. Agents cannot physically access any nonvolatile storage without disassembling the TOE except for removable nonvolatile storage devices, where protection of User and TSF Data are provided when such devices are removed from the TOE environment. Agents have limited or no means of infiltrating the TOE with code to effect a change and the TOE self-verifies its executable code to detect unintentional malfunctions. As such, the Evaluation Assurance Level 2 is appropriate.

EAL 2 is augmented with ALC_FLR.2, Flaw reporting procedures. ALC_FLR.2 ensures that instructions and procedures for the reporting and remediation of identified security flaws are in place, and their inclusion is expected by the consumers of this TOE.





7 TOE Summary specification

This section describes the TOE summary specifications.

7.1 User Authentication Function

Supported functional requirements: FIA_UAU.1, FIA_UID.1, FIA_UAU.7, FIA_ATD.1, FIA_USB.1, FIA_AFL.1, FTA_SSL.3(lui), FTA_SSL.3(rui)

When the control panel or a remote UI is used to operate the MFP, before permitting such operations, the TOE requires user authentication in order to identify and authenticate valid users. However, the submission of print jobs, fax jobs, and I-fax jobs is always permitted. [FIA UAU.1, FIA UID.1]

Two methods of user authentication are supported:

- External Authentication

Authentication is based on user information registered in the authentication server. This may be an Active Directory server that uses Kerberos authentication, or LDAP server that uses LDAP authentication.

- Internal Authentication

Authentication is based on user information registered in the device.

For user authentication, the TOE prompts input of the user name, password, and the login destination. User authentication succeeds only if the user name and password matches the one at the specified destination. For security, note that the password is masked by asterisks in the text field. [FIA UAU.7]

The TOE issues an Access Control Token (ACT) to each user successfully authenticated.

The ACT is an object that contains the user's name and role, as well as the access permissions to the application functions that are specified for each user role. [FIA_ATD.1, FIA_USB.1]

The TOE provides a lockout function in order to minimize invalid login attempts. [FIA AFL.1]

- This function locks out any user that fails to login successfully within the maximum number of failed authentication attempts. A value from 1 to 10 can be specified as the number of attempts before lockout (Initial value: 3).
- Any user that is locked out will not be able to login until the lockout time passes. A value from 1 to 60 minutes can be specified as the lockout time (Initial value: 3 minutes).

The TOE terminates an interactive session when there is no user activity at the control panel or remote UI lasting for a specified period of time. [FTA_SSL.3(lui), FTA_SSL.3(rui)]

- At the control panel, session timeout occurs after a specified period of user inactivity. A value from 10 seconds to 9 minutes can be specified (Initial value: 2 minutes).
- At a remote UI, session timeout occurs after 15 minutes of user inactivity.

7.2 Function Use Restriction Function

- Supported functional requirements: FDP_ACC.1(exec-job), FDP_ACF.1(exec-job), FMT_MSA.1(exec-job), FMT_MSA.3(exec-job), FMT_SMF.1



For each UI, the TOE provides Function Use Restriction, which controls access based on the contents of the ACT issued to authenticated users. Any queries, modifications, deletions, and additions to the role contained in the ACT, are performed by U.ADMINISTRATORs only. For Function Use Restriction, the attribute of the Object is the functions itself, and is therefore fixed.

When the control panel is used, Function Use Restriction Function permits or denies use of functions depending on the settings in "Application Restrictions", which are based on the role contained in the ACT.

When a remote UI is used, Function Use Restriction Function permits or denies use of functions based on attribute values associated with the role in the ACT.

Only U.ADMINISTRATORs are allowed use of all functions.

UI	Object	Condition	Operation
Control panel	Pointer to [Print]	The role associated with U.USER must have	Executed by
		permission to the [Print] function.	activating the Object.
	Pointer to [Copy]	The role associated with U.USER must have	Executed by
		permission to the [Copy] function	activating the Object.
	Pointer to [Scan and	The role associated with U.USER must have	Executed by
	Send]	permission to the [Scan and Send] function	activating the Object.
	Pointer to [Fax]	The role associated with U.USER must have	Executed by
		permission to the [Scan and Send] function	activating the Object.
	Pointer to [Fax/I-Fax	The role associated with U.USER must have	Executed by
	Inbox]	permission to the [Access Stored Files]	activating the Object.
		function	activating the Object.
	Pointer to [Access	The role associated with U.USER must have	Executed by
	Stored Files]	permission to the [Access Stored Files]	activating the Object.
		function	activating the Object.
	Pointer to [Scan and	The role associated with U.USER must have	Executed by
	Store]	permission to the [Scan and Store] function	activating the Object.
Remote UI	Pointer to [Access	The role associated with U.USER is	Cannot be executed.
	Received/Stored		
	Files]	anything other than Administrator.	

Table 32 — Function Use Restriction Policy

7.3 Job Output Restriction Functions

For Print, Copy, Scan, and Fax TX jobs, the TOE provides the following security functions. Job Output Restriction restricts access to submitted jobs, to the user that executed the job.


7.3.1 Job Cancel

- Supported functional requirements: FDP_ACC.1(delete-job), FDP_ACF.1(delete-job), FMT_MSA.1(delete-job), FMT_SMF.1

TOE can delete Print, Copy, Scan, and Fax TX jobs according to following. The user name of these jobs is initialized by username of the user that executed the job.

- U.NORMAL is authorized to delete his/her own job.
- U.ADMINISTRATOR is authorized to delete all jobs.

With the cancellation of the job, the attribute value to be attached to the job is deleted.





7.3.2 In The JOB Access Control

Supported functional requirements: FDP_ACC.1(in-job), FDP_ACC.1(delete-job),
 FDP_ACF.1(in-job), FDP_ACF.1(delete-job), FMT_MSA.1(delete-job), FMT_MSA.3(delete-job),
 FMT SMF.1

TOE provides the following access control functions for documents in each jobs. User name of these jobs is initialized by username of the user that executed the job.

Copy, Scan, Fax TX Jobs

- Nobody is authorized to read documents in any copy jobs.
- Nobody is authorized to read documents in any scan, and Fax TX jobs, except in case of 7.3.3 Temporarily Stored FAX TX Jobs.

Temporarily Stored Print Jobs

If a print job is submitted, the job is temporarily stored in the machine without being output. Additionally, it uses the user name associated with the print job to determine its owner, in order to realize access restriction as described below.

For temporarily stored jobs, the following operations are available to U.USERs, only if the user's name matches the user name associated with the desired job.

- Print
- Change priority for printing
- Delete

For jobs to which print is instructed, U.ADMINISTRATOR is allowed to execute the following:

- Delete


Received Fax Jobs

For documents received by fax/I-fax, the TOE provides the Memory RX Inbox where these jobs may be stored as files, to be output at a later time. Since these are stored in the Memory RX Inbox, access control to this inbox, is equivalent to access control to the stored document data. A seven digit PIN can be assigned to the Memory RX Inbox, to prevent unauthorized access by a user.

Only U.ADMINISTRATORs are authorized to initialize, set, or modify the PIN on the Memory RX Inbox, which means only U.ADMINISTRATORS are allowed access to the stored document data. The TOE realizes access restriction, by determining the U.ADMINISTRATOR that enters the correct PIN to be the owner of the stored document data, preventing any U.NORMAL from executing print, send or delete operations on the document data.

If the control panel is used, U.ADMINISTRATOR is allowed access to the following operations without entering any PIN.

- Print
- Send
- Delete





If a remote UI is used, U.ADMINISTRATOR is allowed access to the following operations only by entering the correct PIN.

- Print
- Send
- Delete

Document Data Stored in Mail Box

For Copy, Scan, or Send jobs, the TOE provides Mail Boxes where these jobs may be stored as document data, to be printed or sent at a later time. Since these are stored in Mail Boxes, access control to Mail Boxes, is equivalent to access control to the stored document data.

A seven digit PIN can be assigned to a Mail Box, to help prevent unauthorized access by a user.

No PIN is required when storing document data in a Mail Box. The TOE realizes access restriction, by determining the U.USER that enters the correct PIN, to be the owner of the stored document data.

For document data stored in a Mail Box, the following operations are made available to U.NORMAL only by entering the correct PIN.

- Print
- Change print settings
- Preview
- Send
- Delete


If the control panel is used, U.ADMINISTRATOR is allowed access to the following operations without entering any PIN.

- Print
- Change print settings
- Preview
- Send
- Delete

If a remote UI is used, U.ADMINISTRATOR is allowed access to the following operations only by entering the correct PIN.

- Print
- Change print settings
- Preview
- Send
- Delete

[Box PIN]





For the PIN set on Mail Boxes/Memory RX Inbox, only U.ADMINISTRATORs assigned the Administrator role are allowed to set, change any PIN. Note however, that U.NORMALs are allowed to change the PIN for the Mail Box they use.

7.3.3 Temporarily Stored FAX TX Jobs

- Supported functional requirements: FDP_ACC.1(in-job), FDP_ACF.1(in-job), FDP ACC.1(delete-job), FDP ACF.1(delete-job)

There are two types of Send Jobs: Fax TX job and Scan job. And there are Delayed Send function and Preview function as Temporarily Stored FAX TX Jobs function to store jobs temporarily.

Delayed Send

When the TOE receives a FAX TX job with transmission time specified, it is first stored temporarily, until sending at the specified time.

For temporarily stored FAX TX jobs, the following operations are available to U.NORMALs, only if the user's name matches the user name associated with the desired job.

- Change destination

For all temporarily stored FAX TX jobs, U.ADMINISTRATOR is allowed to execute the following:

- Change destination

Preview

When the TOE receives a FAX TX job with Preview setting, it is first stored temporarily and previewed, later it is sent.

For temporarily stored FAX TX jobs, the following operations are available to U.USERs, only if the user's name matches the user name associated with the desired job.

- Preview
- Delete Pages
- Delete Jobs

7.4 Forward Received Jobs Function

- Supported functional requirements: FPT FDI EXP.1

The design of the TOE prevents received data from being forwarded directly to a server or computer. This function enables the user to restrict forwarding of received jobs to the LAN.

7.5 HDD Data Erase Function

- Supported functional requirements: FDP_RIP.1

By overwriting with random data, the TOE permanently erases document data (including temporary image files) in the HDD, to ensure that no trace of the document data remains on the HDD.

The user can choose one of the following erasure methods:



- Overwrite using the DoD standard
- Overwrite with random data three times
- Overwrite once with random data
- Overwrite once with null data

The timing in which data are erased is specified below.

- Image files temporarily stored in the HDD as a result of job processing is completely erased during or after processing of the job.
- Document data are completely erased from the HDD, immediately after being deleted from Mail Box/Memory RX Inbox.
- Residual information that remained unerased due to a sudden power shutdown, are completely erased from the HDD upon startup of the TOE.

7.6 HDD Data Encryption Function

The security functions provided by the HDD data encryption chip mounted on the TOE controller board are described below.

The encryption/decryption function provides confidentiality protection for User Data and TSF Data stored in the HDD.

7.6.1 Encryption/Decryption Function

- Supported functional requirements: FCS COP.1(h)

To protect the confidentiality of User Data and TSF Data stored in the HDD, the TOE performs the following cryptographic operations to encrypt all data stored in the HDD.

- Encryption of data written to the HDD.
- Decryption of data read out from the HDD.

The cryptographic algorithm and cryptographic key size are specified below:


- AES algorithm (FIPS PUB 197)
- 256 bit key length

7.6.2 Cryptographic Key Management Function

- Supported functional requirements: FCS CKM.1(h)

The TOE uses the following specifications for generating the cryptographic key that is used by the HDD data encryption function.

- Uses a random number generation algorithm according to NIST SP800-90A Hash_DRBG(SHA-256) for cryptographic key generation
- Generates a cryptographic key with 256 bit key length





The cryptographic key is managed as follows.

- Upon startup, the TOE reads the seed information stored in FlashROM and generates a cryptographic key.
- After generating the cryptographic key, the TOE stores the key in RAM.

No method is available for acquiring the seed from the encryption chip. Note also, that because the cryptographic key is stored in volatile RAM memory, it disappears when the power is shut off.

7.7 LAN Data Protection Function

LAN Data Protection Function encrypts/decrypts all IP packets that are used in communication with an IT device.

7.7.1 IP Packet Encryption Function

- Supported functional requirements: FCS COP.1(n), FTP ITC.1

To ensure confidentiality and integrity of User Data and TSF Data communicated to and from an IT device, the TOE uses IPSec to encrypt/decrypt all IP packets.

- Encryption of IP packets sent to the LAN
- Decryption of IP packets received from the LAN

The following cryptographic algorithm and cryptographic key sizes are used.

- See Table 24

7.7.2 Cryptographic Key Management Function

- Supported functional requirements: FCS CKM.1(n), FCS CKM.2

The TOE uses the following specifications for generating the cryptographic key that is used by the IP packet encryption function.

- Uses a cryptographic key generation algorithm according to FIPS PUB 186-2
- Generates a cryptographic key with 128/168/192/256 bit key length

The following method is used by the TOE, to transmit the cryptographic key used by the IP Packet Encryption Function, to the other party

- ECDH (Elliptic Curve Diffie Hellman) and DH (Diffie Hellman) according to SP800-56A

7.8 Self-Test Function

- Supported functional requirements: FPT TST.1

At startup, the TOE performs the following self-test.



- Checks whether cryptographic algorithms are running properly (AES, 3DES)
- Checks the integrity of the audit log
- Checks the integrity of the executable code of the cryptographic algorithm

7.9 Audit Log Function

- Supported functional requirements: FAU_GEN.1, FAU_GEN.2, FPT_STM.1, FAU_SAR.1, FAU_SAR.2, FAU_STG.1, FAU_STG.4

The TOE generates logs for the following events.

- Startup
- Shutdown
- Job completion
- User authentication success/failure
- Logout
- Use of device management functions
- Use of user management functions
- Changes to the date/time setting
- IPSec connection failures

The items that are recorded on each log, are listed below. The date/time is provided by the TOE. The TOE's date/time information is set by the Management Function, or is set by time synchronization when the accurate time is obtained from the Time Server.

- Date/Time, User Name, Event Type, Outcome (Success/Failed)

Other log events may have additional items as described below.

- Job type (job completion)
- Name of the user that failed authentication (authentication failure)

Also, export of audit logs can be performed from a remote UI, in order to read out log records, although use of this function is restricted to U.ADMINISTRATORs only.

Users other than U.ADMINISTRATOR are not allowed to export audit logs when logged in to the TOE from a remote UI.

When accessing the TOE from a remote UI, another capability restricted to U.ADMINISTRATORs only is the deletion of log records from the [Deleting Collected Logs] menu.

Users other than U.ADMINISTRATOR are not allowed access to this capability when logged in to the TOE from a remote UI, thus preventing unauthorized alterations from occurring.

A maximum of 40,000 audit records can be maintained. Once this becomes full, the oldest audit record is overwritten with the newest.



7.10 Management Functions

7.10.1 User Management Function

- Supported functional requirements: FIA_SOS.1, FMT_MTD.1(user-mgt), FMT_MSA.1(exec-job), FMT_MSA.1(delete-job), FMT_MSA.3(delete-job), FMT_SMR.1, FMT_SMF.1

In the TOE, only U.ADMINISTRATORs assigned the Administrator role can set, change, or delete user, role, and access restriction information and box PINs. General users or U.NORMAL, can only change their own passwords and the PIN for the Mail Box they use.

[Setting/Changing/Deleting User, Role, and Access Restriction Information]

New users are registered by setting the user name and password, and assigning a role to the user. Registered user information can be modified by changing the password, or the assigned role, or the user's registration can be deleted altogether. User specified passwords are checked to see that they are consistent with the password policy.

Four roles exist, which are called "Base Roles": Administrator, Power User, General User, and Limited User. To create a new "Custom Role" different than these, any one of these four base roles, is used as a template for the new role, which can then be registered.

The Administrator role is a role whose base role is "Administrator", and has administrative privileges.

The access restriction information that determines whether use of certain functions is permitted or denied, is specified by the "Application Restrictions" setting, which depends on what role is assigned. Although the initial value for "Application Restrictions" is fixed for base roles, the initial value of "Application Restrictions" can be changed for custom roles.

[Types of Users]

There are two types of users: U.ADMINISTRATOR and U.NORMAL.

- U.ADMINISTRATOR

User assigned the Administrator role and has administrative privileges.

- U.NORMAL

General user assigned a role other than Administrator role.

7.10.2 Device Management Function

- Supported functional requirements: FMT_MTD.1(device-mgt), FMT_SMF.1


To provide for the effective enforcement of security functions, the TOE allows only U.ADMINISTRATORS to set the device management settings in Table 27.

The following settings are also provided.

[Password Policy Settings]

To encourage the use of strong passwords, the following password policy may be set.

- Use a password 4 to 32 characters in length
- Prohibit the use of 3 or more consecutive characters
- Use at least one uppercase characters (A to Z)
- Use at least one lowercase characters (a to z)
- Use at least one number (0-9)





- Use at least one non-alphabet characters (^-@[]:;,./\frac{\pmailer}!"#\\$\\&'()=\\[\frac{\pmailer}{\pmailer}!\]\!
- Allowed characters: All characters other than control characters

[Lockout Policy Settings]

The number of attempts before lockout and the lockout time can be set.

- Number of attempts before lockout

Select a value from 1 to 10 (Initial value: 3)

- Lockout time

Select a value from 1 to 60 minutes (Initial value: 3 minutes)

END