

# [ Ouranos 4D Spatio-temporal ID ]

## Definitions of Spatial ID, Spatial Voxel, and Extended Specifications (Version 1.2)

Ministry of Economy, Trade and Industry  
Ministry of Land, Infrastructure, Transport and Tourism  
Geospatial Information Authority of Japan  
New Energy and Industrial Technology Development Organization  
Information-technology Promotion Agency

## Revision History

Revision Date	Revised Section	Description of Revision
Mar 3, 2025	-	Release of gamma version
Oct 24, 2025	-	Release version 1.1 <ul style="list-style-type: none"> <li>• Review of the text and addition of extended specifications.</li> </ul>
Mar 25, 2026	-	Release version 1.2 beta <ul style="list-style-type: none"> <li>• 1.4.2 Computing each index of Spatial ID <ul style="list-style-type: none"> <li>➤ Added equivalent expressions/formulas</li> </ul> </li> <li>• 1.5.1 Extensions Overview <ul style="list-style-type: none"> <li>➤ Added the notation/format for standard Spatial ID</li> </ul> </li> <li>• 1.5.4 Newly added Polar Spatial ID section</li> </ul>
Jun 4, 2026		Release version 1.2 <ul style="list-style-type: none"> <li>• 1.5.4 Polar Spatial ID <ul style="list-style-type: none"> <li>➤ Revised the description of the Transverse Mercator projection</li> </ul> </li> </ul>

**Preface** - Positioning of this document

The Ouranos Ecosystem is an initiative promoted by the Ministry of Economy, Trade and Industry in Japan to collaborate and utilize data across companies and industries.

In the Ouranos Ecosystem, "Ouranos 4D Spatio-temporal ID" (abbreviated as Spatio-temporal ID) serves as an index for easily integrating, retrieving, and freely distributing a wide variety of spatial information (including temporal information).

"Spatio-temporal ID" is a combination of "Spatial ID," which is an identifier in three-dimensional space, and "Temporal ID," which is an identifier in the time axis.

# Table of Contents

1.	Introduction.....	5
1.1.	Overview of Spatial ID.....	5
1.2.	Features and Significance of Spatial ID.....	5
1.3.	Spatial Voxel.....	6
1.3.1.	Concept of Spatial Voxel.....	6
1.3.2.	Basic Elements of Spatial Partitioning Methods with Spatial Voxel.....	7
1.4.	Spatial ID.....	14
1.4.1.	Spatial ID Format.....	14
1.4.2.	Formulas for Calculating Each Element of Spatial ID.....	14
1.4.3.	Spatial ID Format for Data without Height Value.....	16
1.5.	Extensions.....	16
1.5.1.	Overview.....	16
1.5.2.	Local Spatial ID.....	17
1.5.3.	Spatio-temporal ID.....	25
1.5.4.	Polar Spatial ID.....	29

Appendix-1 Glossary


Appendix-2 Case Studies

## 1. Introduction

### 1.1. Overview of Spatial ID

Spatial ID uniquely identifies a specific region on the Earth. Each region, called Spatial Voxel, is a rectangular cuboid in a three-dimensional grid. The Spatial Voxel can be subdivided to represent areas from global to several centimeters in size, and each voxel receives a unique Spatial ID.


By linking information within each Spatial Voxel to its Spatial ID and using the voxel as the unit of distribution, information sharing becomes standardized and searching or integrating data is easier. Abstracting data by voxel also helps to understand the overall spatial area. Figure 1-1 shows the image of Spatial ID.

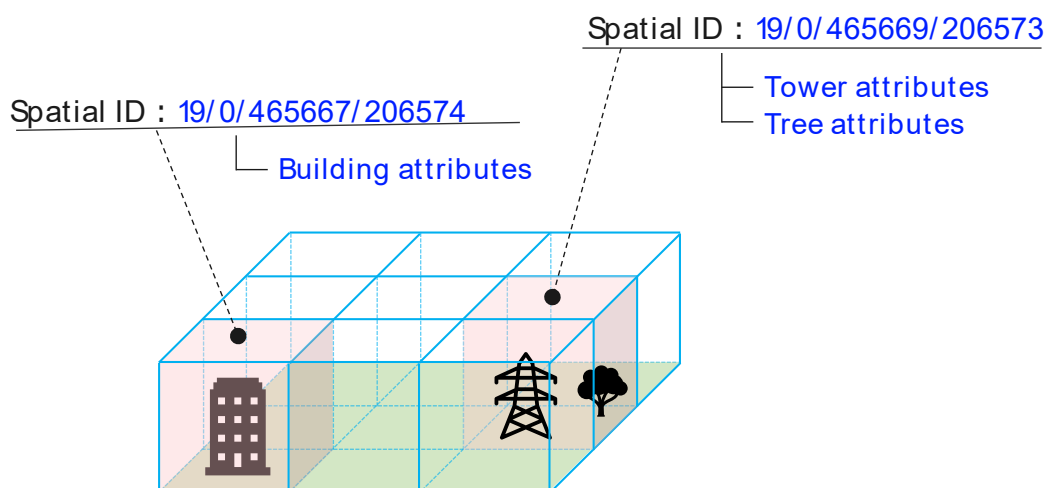

**Figure 1-1 Image of Spatial ID**

### 1.2. Features and Significance of Spatial ID

Spatial ID offers features like four-dimensional space-time handling, unified assignment rules, computable ID generation, and hierarchical structure. They enable interoperability, efficient spatial information use, and reduce processing and communication loads. Concrete benefits depend on each use case. Figure 1-2 summarizes these features, significance, and their relationships.

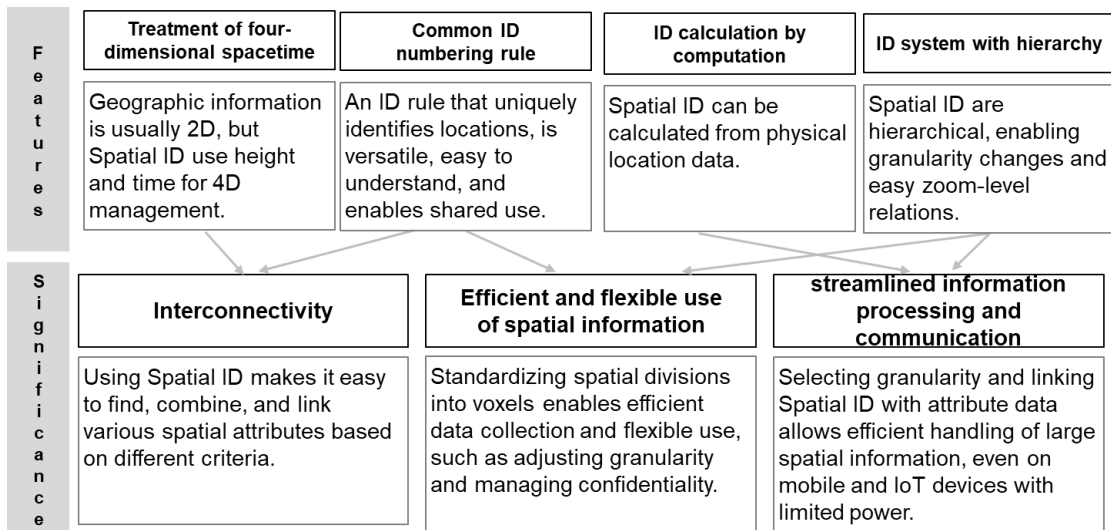

**Figure 1-2 Significance of Spatial ID**

### 1.3. Spatial Voxel


#### 1.3.1. Concept of Spatial Voxel

The spatial area of each rectangular parallelepiped obtained by dividing every space on the Earth, including the air, the ground, the underground, indoors, and the sea, into a rectangular grid is called a "Spatial Voxel." "Spatial ID" is assigned to each Spatial Voxel, which can uniquely identify its position even if the spatial information is based on different specifications.

The Spatial Voxel has the following structure.

- The highest hierarchical level is set to zoom level 0, and the Spatial Voxel is divided into 8 segments each time the zoom level is increased.
- The Spatial Voxel of the upper zoom level and the Spatial Voxel of the lower zoom level divided from it have a parent-child relationship.
- There is no overlapping Spatial Voxel at the same zoom level.

Figure 1-3 shows an image of Spatial Voxel and Spatial ID.

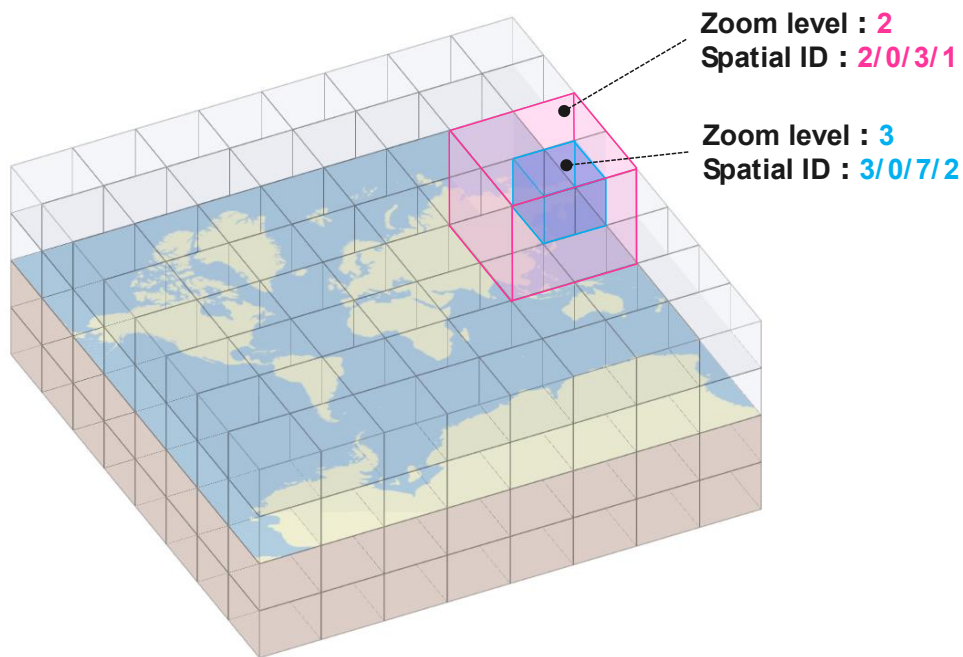


**Figure 1-3 Image of Spatial Voxel and Spatial ID**

### 1.3.2. Basic Elements of Spatial Partitioning Methods with Spatial Voxel

There are three basic elements to define the Spatial Voxel partitioning method. The following sections describe each element in detail.

- (1) The height basis for placing Spatial Voxel
- (2) Horizontal spatial partitioning method
- (3) Vertical spatial partitioning method

In deciding the spatial partitioning method, the following were taken into consideration: affinity with generally distributed geospatial information and related services, convenience of voxel shape and size, and global availability. Figure 1-4 shows the basic elements of the spatial partitioning scheme.

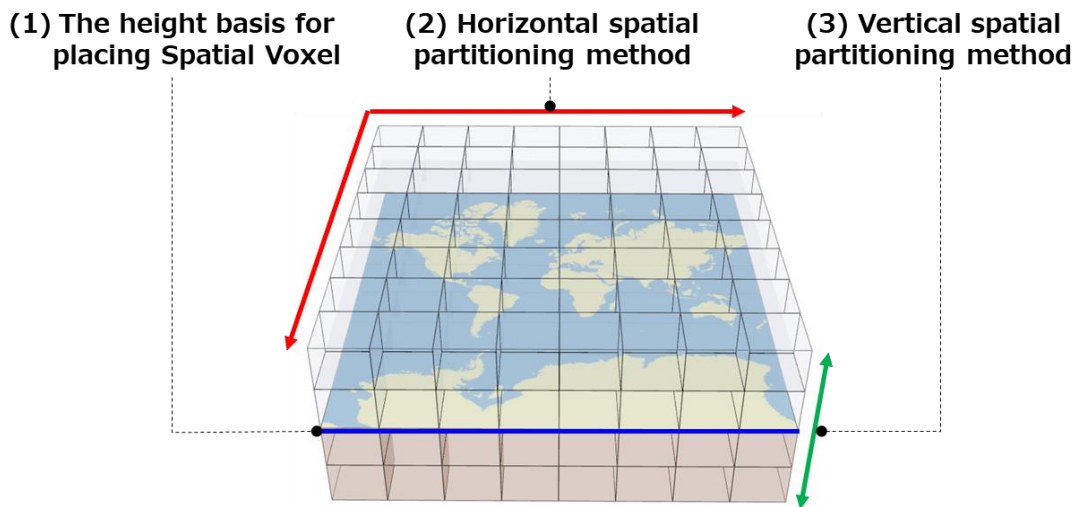

**Figure 1-4 Basic elements of the spatial partitioning scheme**


(1) The height basis for placing Spatial Voxel

i. Reference plane for placing Spatial Voxel

The reference plane for placing Spatial Voxel in three-dimensional space on the Earth is a geoid (plane with equal potential energy due to the Earth's gravity), and the Spatial Voxel is placed in a coordinate space with a plane with an elevation of 0 m as a flat plane.

The height value of the Spatial Voxel corresponds to the elevation value (Orthometric Height), and the spatial attribute information created based on the elevation can be directly related to the Spatial Voxel. Figure 1-5 shows the relationship between ellipsoid height, geoid height, and orthometric height.

$$h=H+N$$

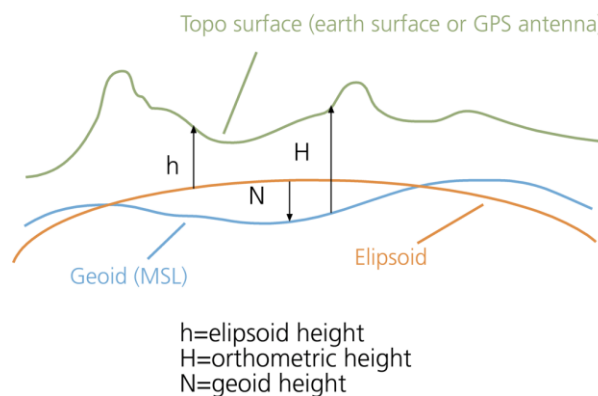

**Figure 1-5 Relationship between ellipsoid height, geoid height and orthometric height**

Source: Witold Fraczek, Esri Applications Prototype Lab  
<https://www.esri.com/news/arcuser/0703/geoid1of3.html>

## ii. Geoid model

The "geoid model" is used as the data to obtain the elevation from the ellipsoid height obtained by satellite positioning. The geoid model is used depending on the country or region, and the basis of the height should be specified as metadata. In Japan, the geoid is defined by the mean sea level of Tokyo Bay and is used as the reference surface for elevation.

## (2) Horizontal spatial partitioning method

### i. Horizontal spatial partitioning

Horizontal partitioning is performed across the entire extent excluding the polar regions (above approximately 85.0511°N and below approximately 85.0511°S), where latitude and longitude in the World Geodetic System are transformed into a square.<sup>1</sup>

The target area of the Earth is as follows:

Longitude (X): 180°W to 180°E

Latitude (Y): 85.0511°S to 85.0511°N

The above area is set to zoom level 0, and 4 divisions (Divide east-west direction in two, divide north-south direction in two) are repeated each time the zoom level increases by 1. This partitioning method is the same as XYZ tiles (Slippy map tile names) adopted by many Web map services.

### ii. Geodetic system

The geodetic system of the map used for horizontal partitioning shall be the World Geodetic System (Japan Geodetic System 2024 (JGD2024) or WGS 84). If necessary, the geodetic system adopted in the application area is specified as metadata of the data related to the Spatial ID.

### iii. Assigning x and y indexes

The x-index for longitude (east-west direction) and the y-index for latitude (north-south direction) are assigned as identification numbers for each divided grid.

Starting from the northwest point (180°W, 85.0511°N) at (0,0), x increments eastward, y increments southward.

#### x-index value

Left-most columns:  $x = 0$ , right-most columns:  $x = 2^{\text{Zoom level}} - 1$

(Increments from 0 of the left-most columns to the next one on the right)

---


<sup>1</sup> The same extent as the GSI Tiles provided by the Geospatial Information Authority of Japan (<https://maps.gsi.go.jp/development/siyou.html>)

y-index value

Top rows:  $y = 0$ , Bottom rows:  $y = 2^{\wedge} \text{Zoom level} - 1$

(Increments from 0 of the top-most rows to the next one on the bottom)

Figure 1-6 shows horizontal partitioning and index assignment.

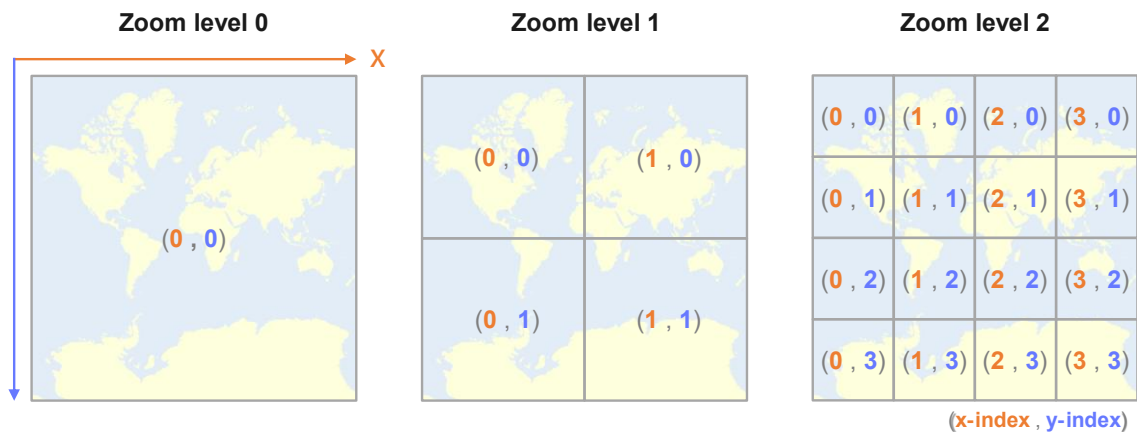

**Figure 1-6 Horizontal partitioning and index assignment**

(3) Vertical spatial partitioning method

i. Vertical spatial partitioning

Vertical spatial partitioning is based on the positive and negative height ranges. Each range is as follows:

Positive height range (elevation): 0 m to 33,554,432 m


Negative height range (elevation): -33,554,432 m to 0 m

The above positive height range and negative height range are set to zoom level 0, and equal division is repeated every time the zoom level increases by 1.

ii. Assigning an f-index

A f-index is assigned to each range divided in the vertical direction. For each additional zoom level, the positive direction assigns a value incremented by 1 from 0 in the positive direction. The negative direction assigns a value decremented by 1 from -1 in the negative direction.

Figure 1-7 shows vertical divisions and index assignment.

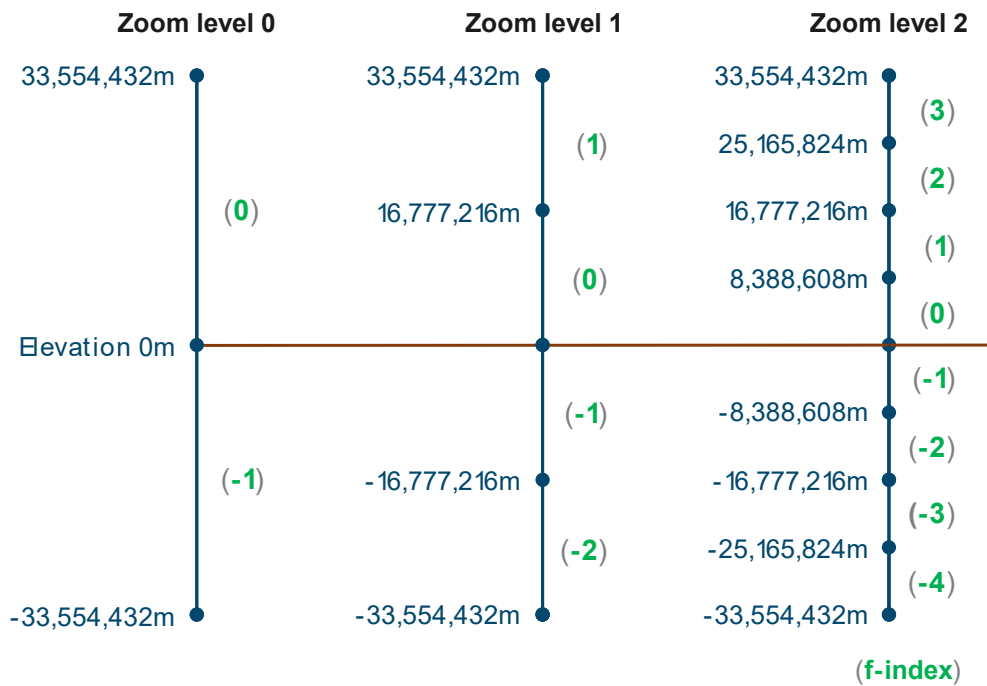

**Figure 1-7 Vertical divisions and assigning Indexes**

\* Elevation values that serve as split points are included in the upper index.


Example) The f-index of 8,338,608 m at zoom level 2 is 1.

### 1.3.2.1. Zoom Level and Size of Spatial Voxel

The Spatial Voxel is divided into 8 segments each time the zoom level increases by 1 from zoom level 0, decreasing in size. Examples of the horizontal (east-west and north-south directions) and vertical sizes of Spatial Voxel at zoom level 0-26 are shown below. Zoom levels 27 and higher can also be defined.

**Table 1-1 Examples of Spatial Voxel sizes at zoom level 0~26**

Zoom Level	Horizontal		Vertical direction (m)
	East-West direction (m)	North-South direction (m)	
0	40,075,016.68	40,075,016.68	33,554,432.00
1	20,037,508.34	20,037,508.34	16,777,216.00
2	10,018,754.17	10,018,754.17	8,388,608.00
3	5,009,377.09	5,009,377.09	4,194,304.00
4	2,504,688.54	2,504,688.54	2,097,152.00
5	1,252,344.27	1,252,344.27	1,048,576.00
6	626,172.14	626,172.14	524,288.00
7	313,086.07	313,086.07	262,144.00
8	156,543.03	156,543.03	131,072.00
9	78,271.52	78,271.52	65,536.00
10	39,135.76	39,135.76	32,768.00
11	19,567.88	19,567.88	16,384.00
12	9,783.94	9,783.94	8,192.00
13	4,891.97	4,891.97	4,096.00
14	2,445.98	2,445.98	2,048.00
15	1,222.99	1,222.99	1,024.00
16	611.50	611.50	512.00
17	305.75	305.75	256.00
18	152.87	152.87	128.00
19	76.44	76.44	64.00
20	38.22	38.22	32.00
21	19.11	19.11	16.00
22	9.55	9.55	8.00
23	4.78	4.78	4.00
24	2.39	2.39	2.00
25	1.19	1.19	1.00
26	0.60	0.60	0.50

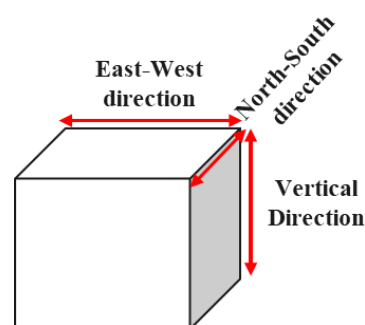

The distances in the east-west and north-south directions in the above table indicate distances at 0 degrees of latitude, and the distances become shorter at higher latitudes.

The vertical distances are the same for all longitudes and latitudes as shown in Table 1-1.

The east-west distance of the Spatial Voxel at each latitude can be calculated by the following formula:

$$\text{East-west distance} = \text{Equatorial radius} * 2 * \text{PI} * \cos(\text{latitude}) / 2^{\text{Zoom level}}$$

(The equatorial radius for geodetic systems JGD2024 and WGS 84 is 6,378,137 m.)

Source: OpenStreetMap

[https://wiki.openstreetmap.org/wiki/Zoom\\_levels](https://wiki.openstreetmap.org/wiki/Zoom_levels)

For reference, the following shows the Spatial Voxel sizes at zoom level 16-26 for cities in Japan (Naha, Tokyo, and Sapporo). Figure 1-8 shows the locations of Naha, Tokyo, and Sapporo.

**Table 1-2 Examples of Spatial Voxel sizes at zoom level 16~26 for Naha, Tokyo, and Sapporo**

<b>Naha</b> (Naha City Hall) Latitude : 26.21 degrees north				<b>Tokyo</b> (Tokyo Metropolitan Government Building) Latitude : 35.89 degrees north				<b>Sapporo</b> (Sapporo City Hall) Latitude : 43.06 degrees north			
Zoom Level	Horizontal		Vertical direction (m)	Zoom Level	Horizontal		Vertical direction (m)	Zoom Level	Horizontal		Vertical direction (m)
	East-West direction (m)	North-South direction (m)			East-West direction (m)	North-South direction (m)			East-West direction (m)	North-South direction (m)	
16	548.98	546.01	512.00	16	497.22	495.01	512.00	16	447.48	445.86	512.00
17	274.49	273.00	256.00	17	248.61	247.51	256.00	17	223.73	222.92	256.00
18	137.24	136.50	128.00	18	124.31	123.75	128.00	18	111.86	111.46	128.00
19	68.62	68.25	64.00	19	62.15	61.88	64.00	19	55.93	55.73	64.00
20	34.31	34.13	32.00	20	31.08	30.94	32.00	20	27.97	27.87	32.00
21	17.16	17.06	16.00	21	15.54	15.47	16.00	21	13.98	13.93	16.00
22	8.58	8.53	8.00	22	7.77	7.73	8.00	22	6.99	6.97	8.00
23	4.29	4.27	4.00	23	3.88	3.87	4.00	23	3.50	3.48	4.00
24	2.14	2.13	2.00	24	1.94	1.93	2.00	24	1.75	1.74	2.00
25	1.07	1.07	1.00	25	0.97	0.97	1.00	25	0.87	0.87	1.00
26	0.54	0.53	0.50	26	0.49	0.48	0.50	26	0.44	0.44	0.50

※ Horizontal length is given by the geodesic distance on the GRS80 ellipsoid.  
If the east-west distance between the top edge (north side) and bottom edge (south side) of the horizontal plane of the Spatial Voxel is different, indicate the distance of the bottom edge.



© Earthstar Geographics

**Figure 1-8 Locations of Naha, Tokyo, and Sapporo**

## 1.4. Spatial ID

### 1.4.1. Spatial ID Format

Spatial ID consists of z, f, x, and y elements, which are connected by forward slashes (/).

Elements that make up Spatial ID

**{z}**: Zoom level

**{f}**: Elevation (vertical direction) index

**{x}**: Longitude (east-west direction) index


**{y}**: Latitude (north-south direction) index

Array of Spatial ID

**{z}/{f}/{x}/{y}**

Example: 20/1/931369/413142

Figure 1-9 shows an image of the Spatial ID of a Spatial Voxel.

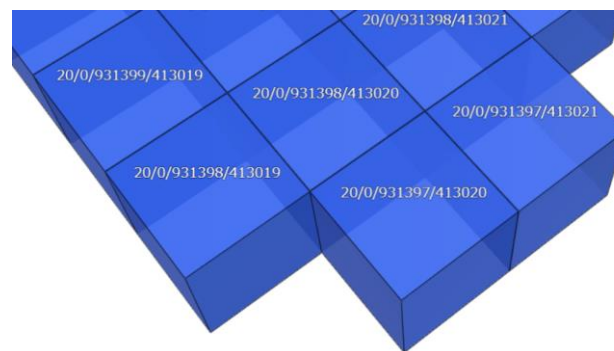

**Figure 1-9 Image showing the Spatial ID of Spatial Voxel**

### 1.4.2. Formulas for Calculating Each Element of Spatial ID

The formulas for calculating each element (f, x, y) of Spatial ID from longitude, latitude, elevation, and zoom level are as follows:

-----  
*lng*: Longitude [Decimal Degree]  
*lat*: Latitude [Decimal Degree], *lat\_rad*: Latitude [Radians]  
*h*: Elevation [m]  
*z*: Zoom Level

$$\begin{aligned}
 n &= 2^z \\
 Z &= 25 \text{ (The zoom level at which the voxel height is 1m)} \\
 H &= 2^Z \text{ [m]} \\
 f &= \text{floor}\left(n * \frac{h}{H}\right) \\
 x &= \text{floor}\left(n * \left(\frac{lng + 180}{360}\right)\right) \\
 y &= \text{floor}\left(n * \frac{1 - \frac{\log\left(\tan(lat\_rad) + \frac{1}{\cos(lat\_rad)}\right)}{PI}}{2}\right)
 \end{aligned}$$

-----  
 Source: UN Vector Tile Toolkit  
<https://github.com/unvt/zfxy-spec>

For consistency of notation and program formulas, the following provide equivalent expressions for the x and y indices with longitude and latitude unified in radians. Polar Spatial ID described later is organized in the same format.

-----  
*lng<sub>rad</sub>*: Longitude [Radians]  
*lat<sub>rad</sub>*: Latitude [Radians]  
*z*: Zoom Level

$$\begin{aligned}
 n &= 2^z \\
 Z &= 25 \text{ (The zoom level at which the voxel height is 1m)} \\
 x &= \text{floor}\left(n * \left(\frac{1}{2} + \frac{1}{2\pi} lng\_rad\right)\right) \\
 y &= \text{floor}\left(n * \left(\frac{1}{2} - \frac{1}{2\pi} \log\left(\tan(lat\_rad) + \frac{1}{\cos(lat\_rad)}\right)\right)\right)
 \end{aligned}$$

-----  
 The *n* following the floor function represents the number of subdivisions of Spatial ID corresponding to zoom level (*z*). The expression in parentheses following *n* is a normalization of the defined overall extent to real values in the range [0–1]. The first term in the parentheses, “1/2” shifts the domain of the subsequent expression from [-1/2 to +1/2] to [0–1]. Here, log denotes the natural logarithm.

### 1.4.3. Spatial ID Format for Data without Height Value


In spatial data, there are many two-dimensional data (E.G., demographics, zoning, land use) without height value. When these data are related to Spatial ID, the following ID format excluding the f-index is applied because the f-index indicating elevation is not necessary.

Array of Spatial ID corresponding to data without height value

**{z}/{x}/{y}**

Example: 20/931369/413142

This is the same array as XYZ tiles numbers in web map services such as Geographical Survey Institute Maps. Figure 1-10 shows an example of a Spatial ID corresponding to data without a height value.

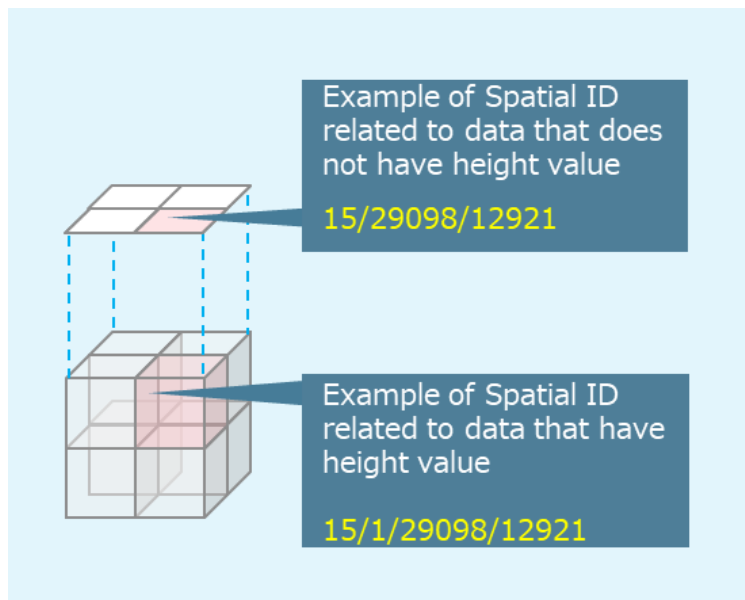

**Figure 1-10 Example of Spatial ID corresponding to data without height value**

## 1.5. Extensions

### 1.5.1. Overview

This section describes the specifications for "Local Spatial ID," which applies the role of Spatial ID to managing local spatial information, "Spatio-temporal ID," which applies the role of Spatial ID to managing information that changes or moves over time, and "Polar Spatial ID," which covers the polar regions outside the extent of Spatial ID. Additionally, because Local Spatial ID, Spatio-temporal ID, and Polar Spatial ID are extensions, their application is optional; therefore, their implementation shall be determined according to the needs of the use case.


In this section, the Spatial ID is referred to as "standard Spatial ID" to explicitly contrast with the extensions.

### 1.5.2. Local Spatial ID

Local Spatial ID is a common rule that can be used to manage spatial information when information needs to be shared within a local area. Specifically, Local Spatial ID is intended to be applied in cases such as when data managed in a local coordinate system indoors, e.g., in buildings is handled; when real spaces and digital spaces are linked in entertainment use cases to utilize spaces at various positions, and when the local coordinate system itself moves, such as inside a vehicle's bed.

#### (1) Spatial partitioning method for Local Spatial ID


The spatial partitioning method for Local Spatial ID in the horizontal direction is as follows:

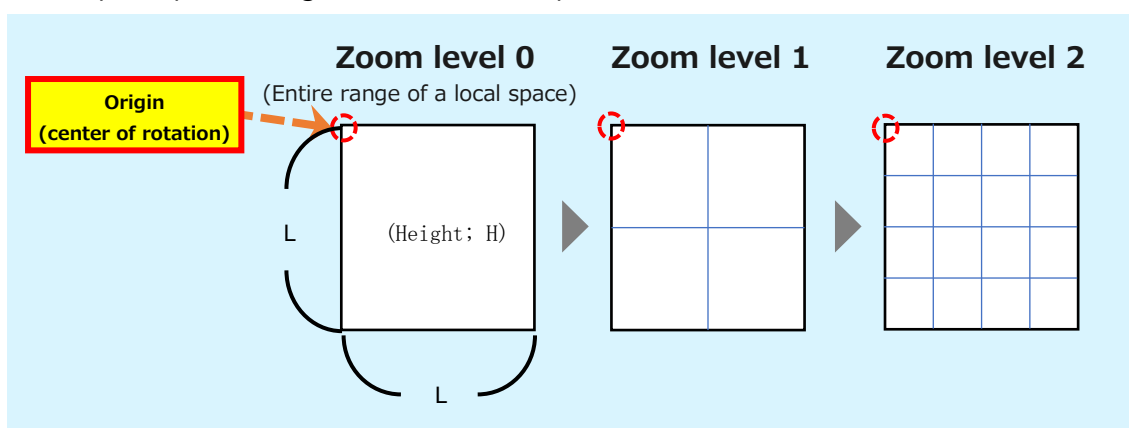

**Figure 1-11 Spatial partitioning method for Local Spatial ID (horizontal direction)**

The entire range of local spaces is defined in accordance with the interoperability and the reusability of codes based on the same concepts and logic as standard Spatial ID, and subdivision into four parts is repeated in a two-dimensional space; subdivision into eight parts is repeated in a three-dimensional space by the same method as standard Spatial ID.

The spatial partitioning method for the vertical direction of Local Spatial ID is as follows:

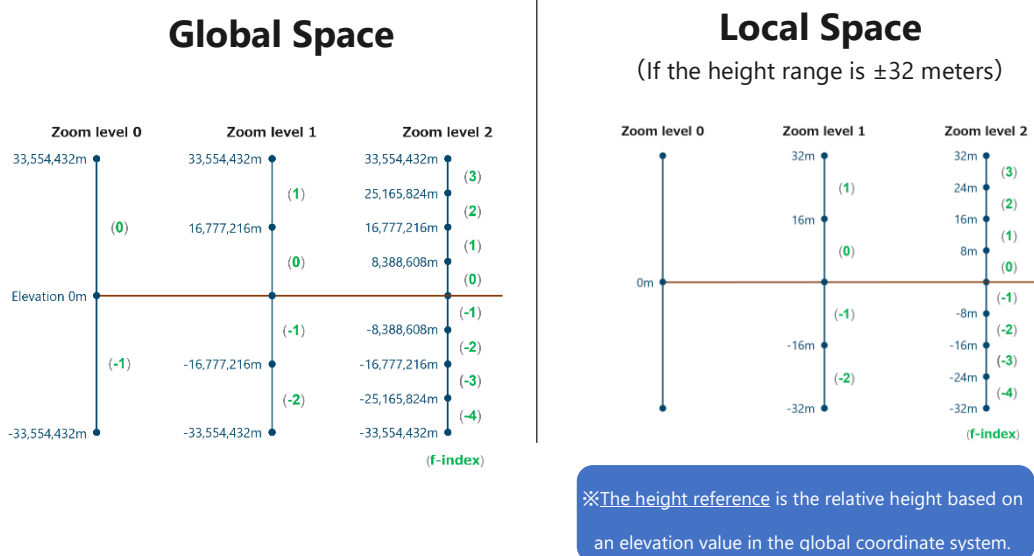

**Figure 1-12 Spatial partitioning method for Local Spatial ID (vertical direction)**

(2) Local Spatial ID format

Spatial ID consists of z, f, x, and y elements, which are connected by forward slashes (/). The format is the same as that of standard Spatial ID.

Elements that make up Spatial ID

- {z}: Zoom level
- {f}: f-index
- {x}: X-index
- {y}: Y-index

Array of Spatial ID

**{z}/{f}/{x}/{y}**

Example: 2/0/1/3

The illustrative image below shows the Local Spatial ID for each Spatial Voxel<sup>2</sup>. This example uses “zoom level 2,” creating an array of “4 × 4 cells” in a two-dimensional space. Figure 1-13 shows an image of the Spatial ID of a Spatial Voxel.

<sup>2</sup> SDK demo for Local Spatial ID <https://geolonia.github.io/local-spatial-id-js-sdk/>

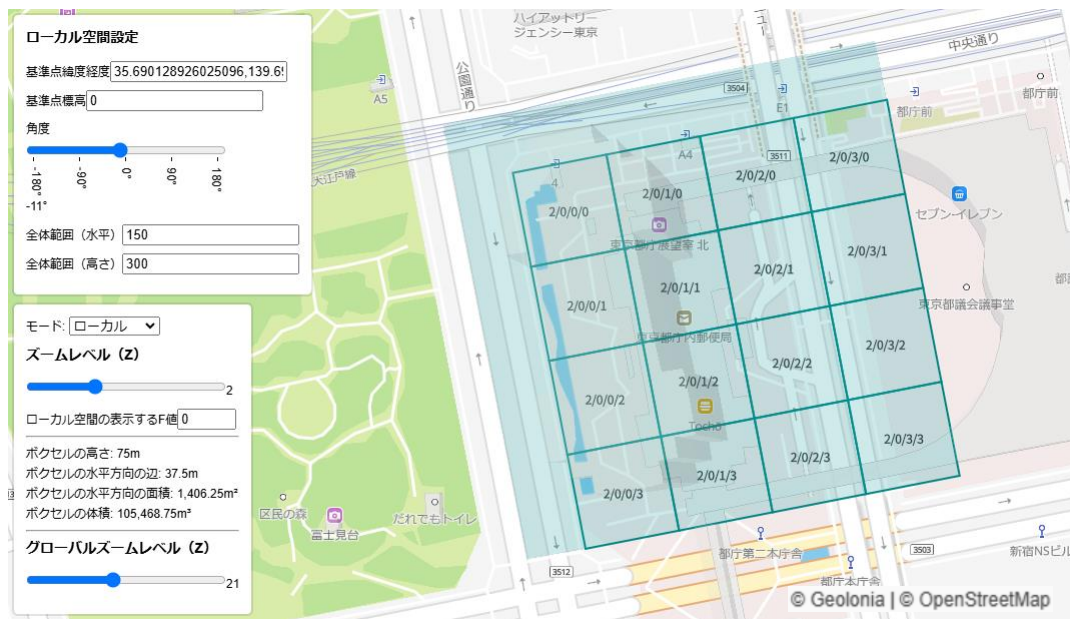


Figure 1-13 Image showing the Spatial ID of Spatial Voxel

(3) Formulas for calculating each index of Spatial ID

The formulas for calculating each index ( $f$ ,  $x$ ,  $y$ ) of Local Spatial ID from local space coordinates ( $X$ ,  $Y$ ), height, and zoom level are as follows:

[Formulas for calculating each index of Local Spatial ID]

$$x = \text{floor} ( n * X / L )$$

$$y = \text{floor} ( n * Y / L )$$

$$f = \text{floor} ( n * h / H )$$

$$\text{※} n = 2^z (z: \text{Zoom level})$$

$(X, Y)$  = Local space coordinates[m]

$h$  = Height (based on the elevation of the origin in the global coordinate system) [m]


$[L, H]$ : Length of one side of the entire range(L; horizontal, H; vertical)

$f$ :  $f$  – index

$x$ :  $X$  – index

$y$ :  $Y$  direction index


The coordinate axes and entire range of Local Spatial ID are defined as follows:

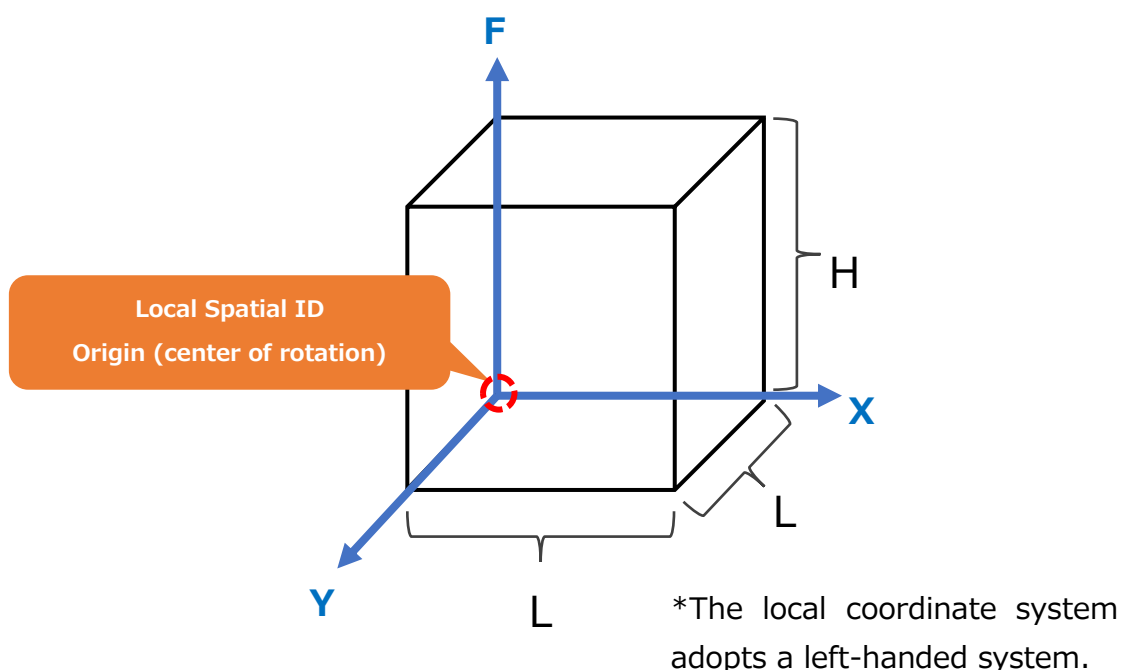

**Figure 1-14 Definition of coordinate axes and entire range of Local Spatial ID**

The local coordinate system adopts a left-handed system. The figure shows the origin of the Local Spatial ID as a red circle, which is the center of rotation for positioning relative to the global coordinates. Besides, the length of one side of the entire range of Local Spatial ID can be defined independently as L (length of X and Y are the same) in the horizontal direction and H in the vertical direction.

Example calculations based on the formulas for Local Spatial ID are as follows:

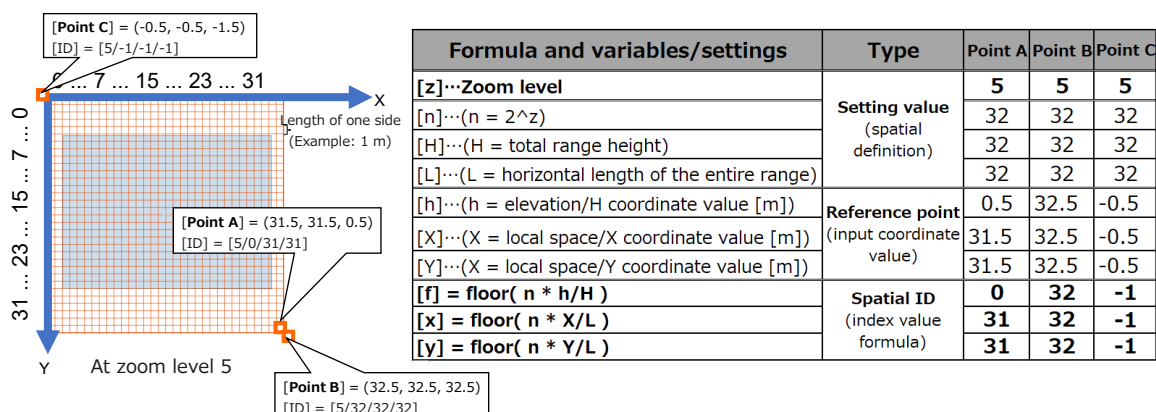

### Figure 1-15 Example calculations using calculation formulas for Local Spatial ID

In the Local Spatial ID specifications, the start point of the indexes in the horizontal (X- and Y-) direction is based on the origin of the local coordinate system. The results of trial calculations with simple settings using formulas in the Local Spatial ID specifications are shown as an example. Below is an example calculation using the Local Spatial ID calculation formulas (assuming the entire range is a cubic voxel measuring  $32 \times 32 \times 32$  m).

[Point A]: The first voxel with the largest coordinate values and a height value close to 0 within the entire range in the local coordinate system

$$\Rightarrow (X,Y,h) = (31.5,31.5,0.5)$$

[Point B]: The first voxel outside the entire range in the positive direction  $\Rightarrow (X,Y,h) = (32.5,32.5,32.5)$

[Point C]: The first voxel outside the entire range in the negative direction  $\Rightarrow (X,Y,h) = (-0.5,-0.5,-0.5)$

#### (4) Definition of coordinate in Local Spatial ID


The definition of coordinate in Local Spatial ID consists of the following elements. Defining coordinate information enables correspondence with standard Spatial ID.

- ① Length of each side of the entire range [in meters]  
 $\Rightarrow$  Let the length of both sides in the horizontal direction (X, Y) be [L].  
The length in the vertical direction can be defined with a length [H], which is different from [L].
- ② Origin position\* (latitude, longitude, and elevation)  
 $\Rightarrow$  Set the upper left corner of the entire range as the coordinate origin and the center of rotation.
- ③ Rotation angle\* (Euler angle;  $-180$  to  $+180^\circ$ ) [degrees]  
 $\Rightarrow$  [Rotation angle ( $\psi$ ) around the Z axis (X-Y plane)]

\*When used only locally, the definition is optional.

※In cases where the local coordinates themselves move, a possible operation is to update the information of ii and iii after the movement is complete, rather than updating the coordinates dynamically during the movement.

The following is an example of the entire range of Local Spatial ID overlaid on standard Spatial ID based on coordinate definition information.

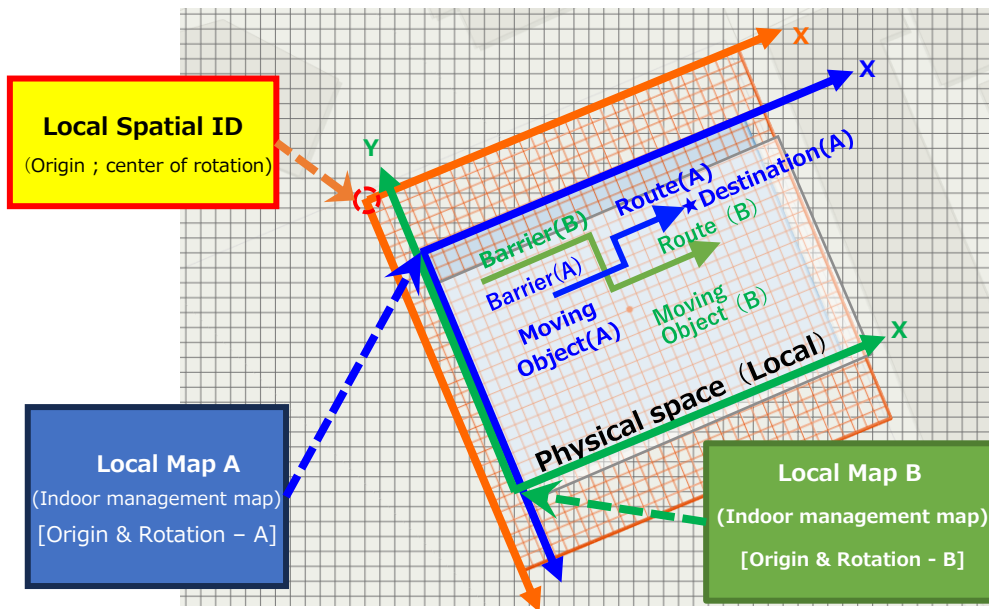

**Figure 1-16 Local Spatial ID overlaid on standard Spatial ID based on coordinate definition information**

(5) Zoom level and voxel size of Local Spatial ID

The relationship between zoom level and voxel size in Local Spatial ID is as follows:


Zoom level	Entire range	Voxel size[m]	Zoom level	Entire range	Voxel size[m]
<b>0</b>	32	<b>32</b>	<b>0</b>	25.6	<b>25.6</b>
1	32	16	1	25.6	12.8
2	32	8	2	25.6	6.4
3	32	4	3	25.6	3.2
4	32	2	4	25.6	1.6
<b>5</b>	32	<b>1</b>	5	25.6	0.8
6	32	0.5	6	25.6	0.4
7	32	0.25	7	25.6	0.2
8	32	0.125	<b>8</b>	25.6	<b>0.1</b>

**Figure 1-17 Zoom level and voxel size of Local Spatial ID**

In the example on the left above, when the entire range is defined to have 32-m sides, zoom level [5] creates 1-m voxels, which can be used as the operational reference unit. To set the reference unit to '0.1 m (10 cm),' set the length of one side of the entire range to 25.6 m so that zoom level [8] creates 10-cm voxels. In other words, to arbitrarily define the operational reference unit, you should specify the size of the entire range as 'the reference unit multiplied by the powers of 2.'

(6) Handling of areas outside the range of Local Spatial ID

The handling of areas outside the entire range of Local Spatial ID is as follows:

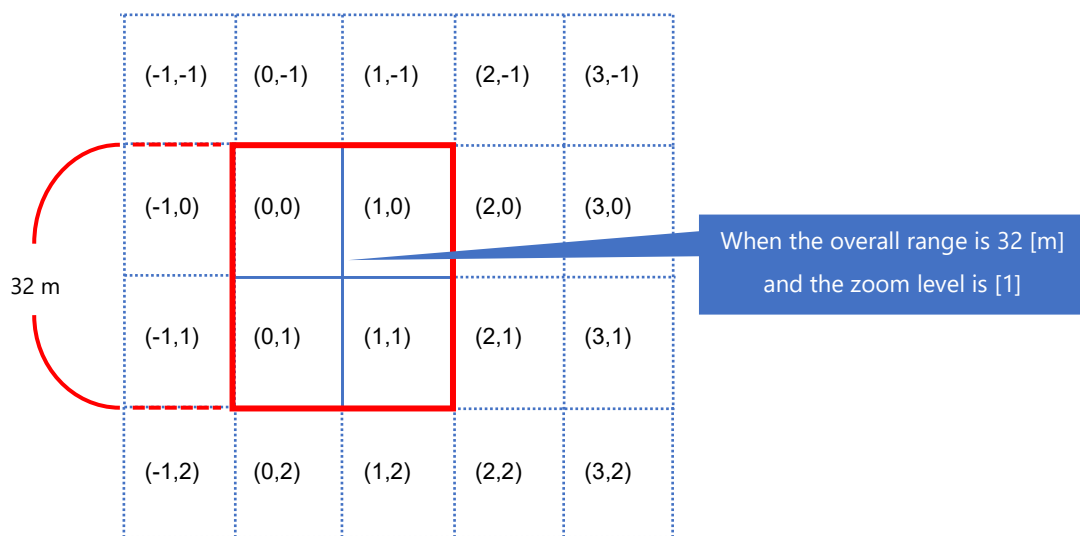

**Figure 1-18 Handling of areas outside the entire range of Local Spatial ID**

Areas outside the defined entire range (including negative directions) can also be indexed. However, considering the influence on tools such as libraries, IDs outside the entire range cannot be used.

Regarding the connection processing of the left and right boundaries of the entire range, when the adjacency of voxels is determined based on the boundary in the left-right direction (definition range: 180° west longitude to 180° east longitude) of standard Spatial ID, the two ends are connected as being adjacent. However, in Local Spatial ID, the left and right ends are not connected (similar to the vertical direction).

(7) Correspondence of Local Spatial ID and standard Spatial ID

The following is an example of corresponding Local Spatial ID with standard Spatial ID in a 3D viewer.

### Local Spatial ID/common library

The following is an example of display in a 3D viewer based on the definition information of Local Spatial ID coordinate using a demo site.

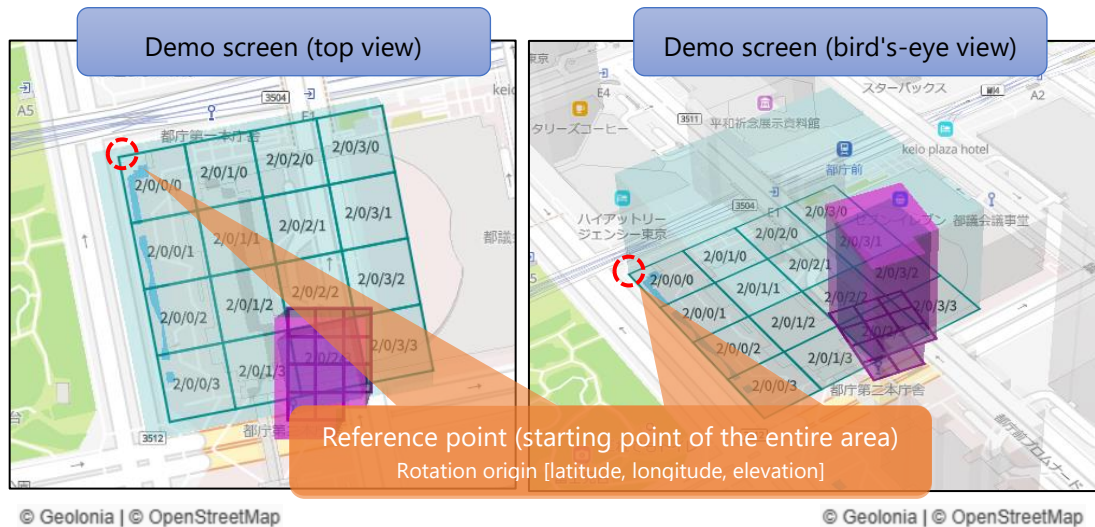


Figure 1-19 Example display of Local Spatial ID using 3D viewer

The following settings and operations are available on the demo site. Selecting a part of Local Spatial ID enables to obtain the voxels of corresponding standard Spatial ID (purple voxels in the figure).

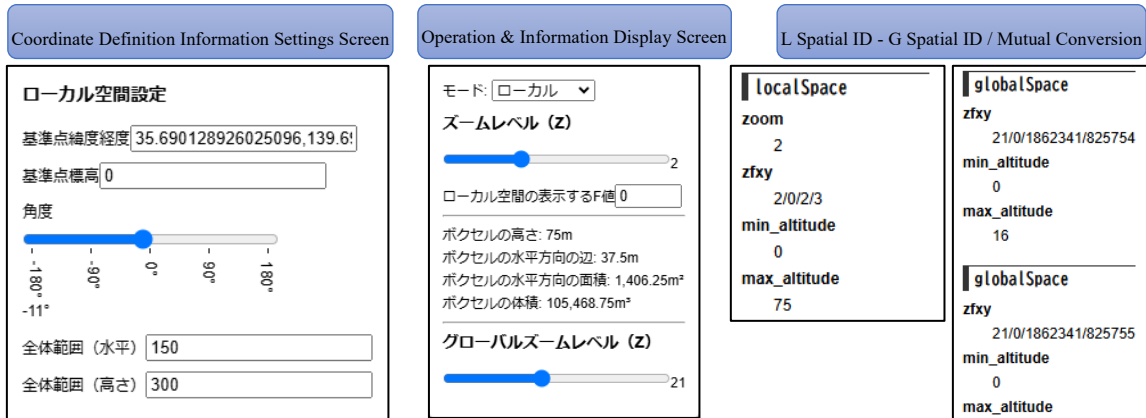


Figure 1-20 Demo site settings screen and information confirmation screen<sup>3</sup>

<sup>3</sup> The demonstration site interface is currently available only in Japanese. The language used in the screenshot does not affect the technical specifications described in this guideline.

In the above settings screen, the following information is set as the coordinate definition information shown in Figure 1-19, and the related information can be checked on the screen.


- Coordinate definition information: [Latitude and longitude of the reference point][Elevation][Angle][Entire range (horizontal)][Entire range (vertical)]  
Example: [35.690128926025096,139.69097558834432][0][-11][150][300]
- Mode selection (local or global)
- Zoom level [local, global]

### 1.5.3. Spatio-temporal ID

Spatio-temporal ID is defined so that its role as a search key for searching and integrating spatial information of Spatial ID can be applied to information that changes and moves over time. By linking and integrating information on moving objects and events to Spatio-temporal ID created by dividing the time axis into equal intervals, it is possible to identify the general situation (number of moving objects, pedestrian traffic, weather conditions, etc.) at a specific time and space. This can be used to identify Spatio-temporal points with high congestion or risk levels.

#### (1) Structure of Spatio-temporal ID

Spatio-temporal ID consists of Spatial ID and Temporal ID, with the Temporal ID being optional. Figure 1-21 shows a comparison of Spatial ID and Spatio-temporal ID.

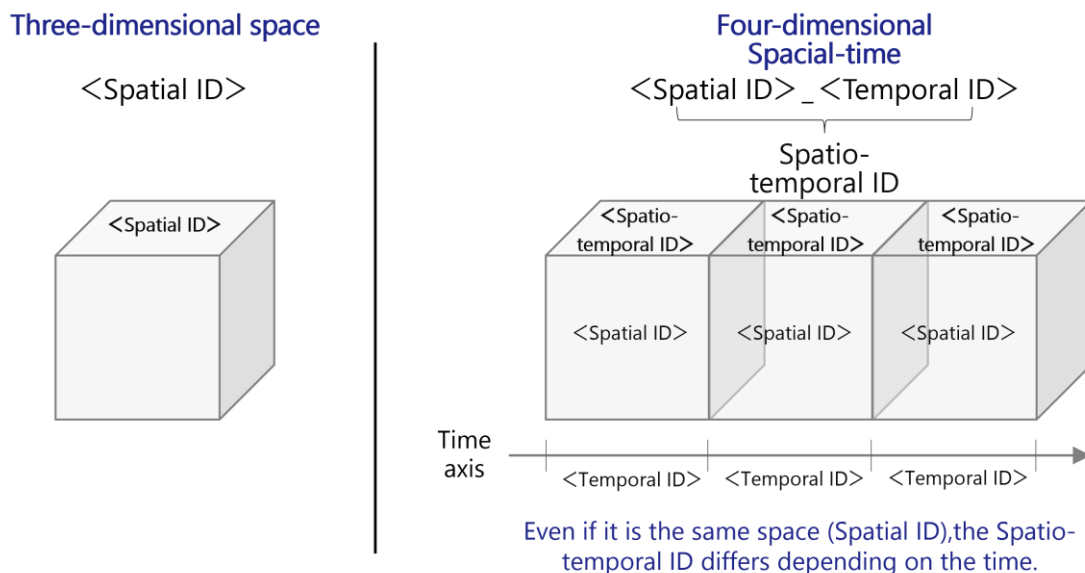


**Figure 1-21 Image of comparison of Spatial ID and Spatio-temporal ID**

## (2) Time axis partitioning method

The time axis is divided into equal intervals [arbitrarily specified intervals (unit: seconds)] starting from the starting point of the time axis [1970/1/1, 0:00], and a unique identifier is assigned to each time interval. The defined items and their description for time axis partitioning are as follows:

Starting point of time axis: 1970/1/1, 0:00 (Coordinated Universal Time (UTC))

Time unit: seconds

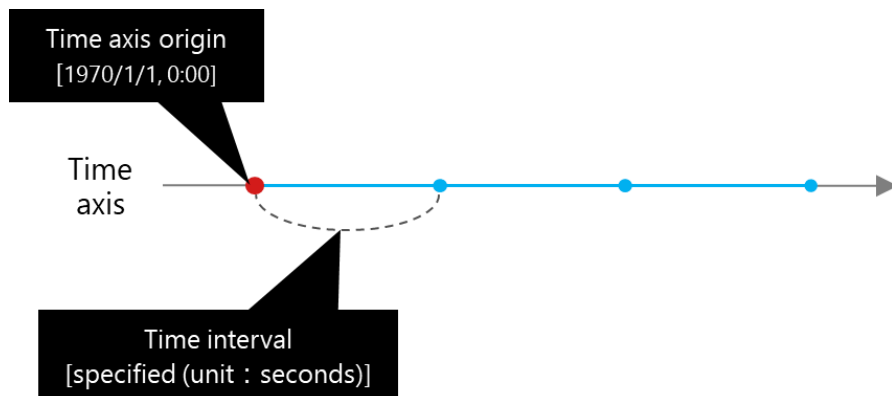

**Figure 1-22 Time axis partitioning**

The starting point of the time axis is 1970/1/1 0:00 (Coordinated Universal Time (UTC)), which is the starting point of UNIX time, and the number of seconds elapsed from the starting point is equivalent to UNIX time. UNIX time is not affected by time differences between countries and regions or daylight-saving time, so globally unified Temporal ID can be defined. Because UNIX time is based on Coordinated Universal Time (UTC), the time used to calculate Temporal ID is unified to Coordinated Universal Time (UTC).

Time intervals can be specified as any number of seconds. Multiple levels can be defined, and they are independent of the zoom level of Spatial ID.

## (3) Calculation method for time index


The following formula is used to calculate the time index, which is the identifier for each time interval, from UNIX time and the time interval (seconds). Figure 1-23 shows the components of a divided time axis.

-----

$t$  : Time index(The identifier for each time interval)  
 $u$  : UNIX time (The number of seconds elapsed from 1970/1/1 0:00)  
 $i$  : The time interval (seconds)

$$t = \text{floor}(u / i)$$

-----

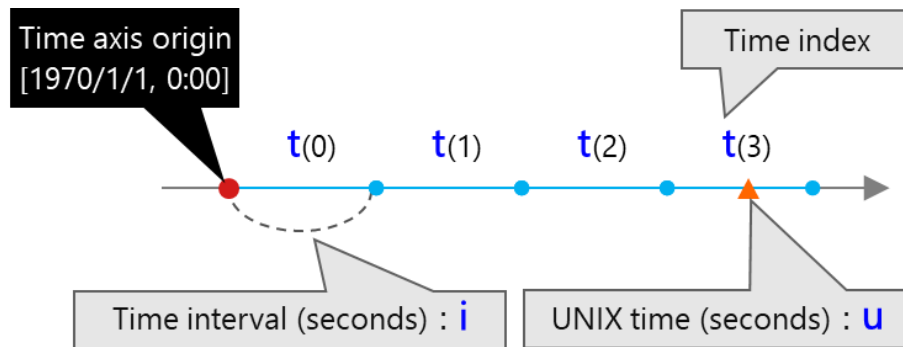

**Figure 1-23 Components in a divided time axis**

(4) Format of Spatio-temporal ID

Spatio-temporal ID is created by adding Temporal ID (consisting of a time interval and a time index) to Spatial ID ( $\{z\}/\{f\}/\{x\}/\{y\}$ ).

The character used to link the Spatial ID and Temporal ID is an underscore (\_). (Although a slash (/) is used as the linking character between indexes for Spatial ID, the underscore is employed to avoid confusion with Spatial ID, which use Spatial ID that correspond to data without height information ( $\{z\}/\{x\}/\{y\}$ .)

Components of Temporal ID

**{i}**: Time interval (seconds)

**{T}**: Time index

Array of Spatio-temporal ID

**{z}/\{f\}/\{x\}/\{y\}\_\{i\}/\{t}**

Example: 12/0/3638/1614\_1800/809712


(5) Identification of the relationship between Temporal ID with different time interval definitions

Calculating the elapsed time in seconds from the origin based on Temporal ID components enables the identification of the relationship between Temporal ID with different time interval definitions (such as overlap and inclusion).

Formula for calculating the start point (seconds) of the time range of Temporal ID  
 $i * t$  [Time interval \* Time index]

Formula for calculating the end point (seconds) of the time range of Temporal ID  
 $(i * t) + t$  [(Time interval \* Time index) + Time interval]

Figure 1-24 shows the conversion from a Temporal ID to a time range in seconds.

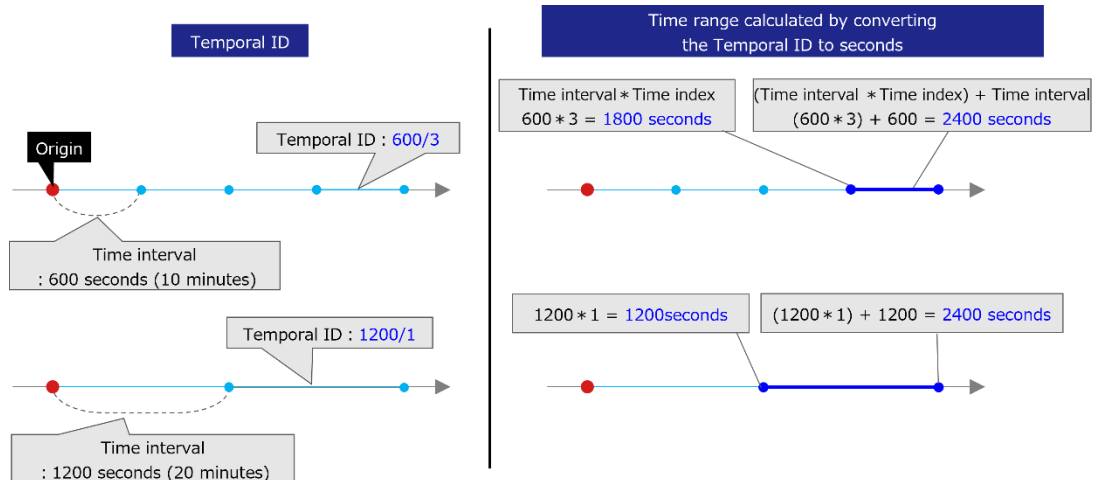

**Figure 1-24 Conversion from Temporal ID to time range in seconds**

#### 1.5.4. Polar Spatial ID

As described in Section 1.3.2, the map extent covered by standard Spatial ID ranges from 85.0511°S to 85.0511°N.

Therefore, as an extension of standard Spatial ID to cover the polar regions beyond 85.0511°S and 85.0511°N, Polar Spatial ID which applies the Transverse Mercator projection is defined. By combining standard Spatial ID and Polar Spatial ID, the entire Earth, including the polar regions, can be uniquely identified. In Polar Spatial ID, areas within an angular distance of 4.9489° (= 90° – 85.0511°) centered on the two points at latitude 0° and longitude ±90° are excluded. Each boundary is a circle on the sphere.

By combining standard Spatial ID and Polar Spatial ID, the entire Earth, including the polar regions, can be uniquely identified.


##### (1) Transverse Mercator projection

For horizontal subdivision in Polar Spatial ID, the Transverse Mercator projection is used with the central meridian set to the prime meridian (longitude 0°). It is similar to the Mercator projection, but differs in that the cylinder is tangent to the sphere or ellipsoid along a meridian rather than along the equator.

- In Polar Spatial ID, as in the standard Spatial ID, the formulas treat the Earth as a sphere.

In Polar Spatial ID, the overall extent (both east–west and north–south) is defined as the Earth’s equatorial circumference (40,075,016.69 m), in the same manner as the overall extent of the standard Spatial ID. A conceptual diagram of the projections and overall extents of the standard Spatial ID and the Polar Spatial ID is shown in Figure 2-25.

In the Transverse Mercator projection, the central meridian is set to the prime meridian, and—analogueous to the North/South Poles in the Mercator projection—the so-called East/West Poles cannot be rendered. Along the equator on the near side of the Earth (the hemisphere including longitude 0°), the display range extends from 85.0511°E to 85.0511°W, whereas on the far side (the hemisphere including longitude 180°), the display range along the equator extends from 94.9489°E to 94.9489°W.

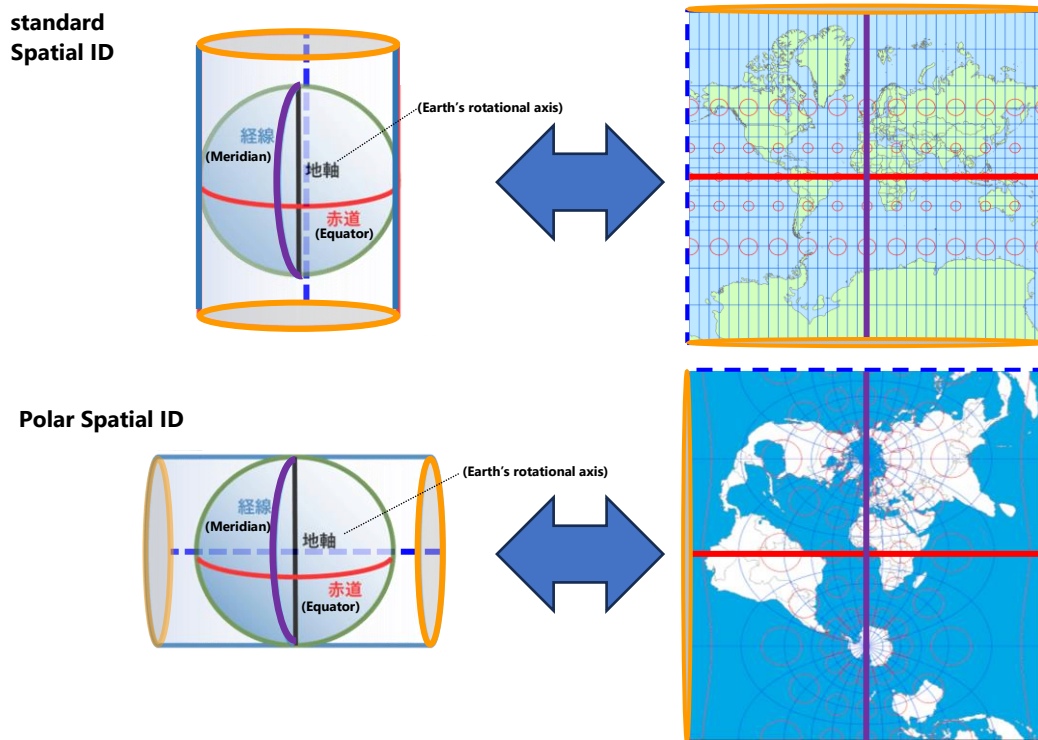

Sources: Adapted from  
「Webメルカトル (ウェブメルカトル)」の由来と真相  
(The Origin and Background of “Web Mercator”) : <https://www.wingfield.gr.jp/archives/4294>  
横メルカトル図法の詳しい解説

(A Detailed Explanation of the Transverse Mercator Projection): <https://www.wingfield.gr.jp/archives/12068>

**Figure 1-25 Conceptual diagram of the projections and overall extents of the Standard Spatial ID and the Polar Spatial ID**

Apart from the orientation of the cylinder (vertical or horizontal), the Standard Spatial ID and the Polar Spatial ID can be regarded as being based on the same mechanism. In the former, the cylinder is placed vertically so that it is tangent to the equator and projected; the cylinder is then unrolled into a plane (cut along the blue line on the back side), and the length of the cylinder is limited to a fixed span from the equator so that the overall extent becomes square. In the latter, the cylinder is placed horizontally so that it is tangent to a meridian and projected; the cylinder is then unrolled into a plane, and the length of the cylinder is limited to a fixed span from the central meridian so that the overall extent becomes square.


## (2) Positioning of Polar Spatial ID

Polar Spatial ID targets regions beyond  $\pm 85.0511^\circ$  latitude that lie outside the map extent defined by standard Spatial ID. The polar regions correspond to the areas indicated by the

red dashed lines in Figure 2-26. In latitude–longitude coordinates, they are the areas at the top and bottom edges of the display range (from 90°S to 90°N); in the standard Spatial ID, they lie outside the northern and southern bounds of its extent; and in the Polar Spatial ID, they are the areas near the red circles, corresponding to the poles (top: North Pole / bottom: South Pole).

The definitions for vertical spatial subdivision, as well as the zoom levels and sizes of spatial voxels, are the same as those in standard Spatial ID.

Standard Spatial ID and Polar Spatial ID are not mutually exclusive; overlap between their extents is permitted. When converting from latitude/longitude to Spatial ID, coordinates within the extent of the standard Spatial ID (within  $\pm 85.0511^\circ$  latitude) are converted to standard Spatial ID, while polar regions (beyond  $\pm 85.0511^\circ$  latitude) are converted to Polar Spatial ID. However, even within the map extent of the standard Spatial ID, if use of Polar Spatial ID is explicitly specified, conversion shall be made to Polar Spatial ID regardless of the map extent.

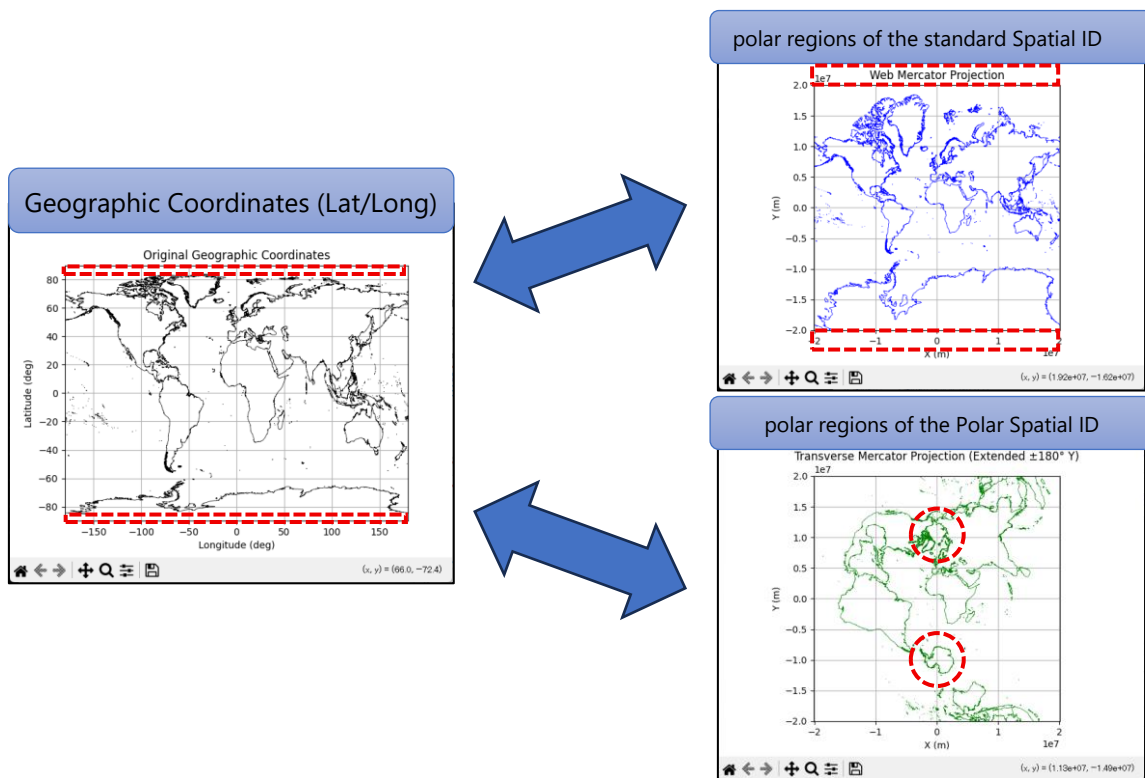

**Figure 1-26 Polar regions (Web Mercator vs Transverse Mercator)**

### (3) Format of Polar Spatial ID

To distinguish it from standard Spatial ID, a minus sign is prefixed to the zoom level (z).

- standard Spatial ID:  $\{z\}/\{f\}/\{x\}/\{y\}$
- Polar Spatial ID:  $-\{z\}/\{f\}/\{x\}/\{y\}$

### (4) Computation of Polar Spatial ID

The formulas for computing the indices (f, z, x, y) of Spatial ID from longitude, latitude, height, and zoom level in Polar Spatial ID are as follows. As with standard Spatial ID, longitude and latitude are expressed in radians.

---

$lng_{rad}$ : Longitude [Radians]

$lat_{rad}$ : Latitude [Radians]

$h$ : Elevation [m]

$z$ : Zoom Level

$$n = 2^z$$

$Z = 25$  (The zoom level at which the voxel height is 1m)

$$H = 2^Z \text{ [m]}$$

$$f = \text{floor}\left(n * \frac{h}{H}\right)$$

$$x = \text{floor}\left(n * \left(\frac{1}{2} + \frac{1}{2\pi} \tanh^{-1}(\cos(lat_{rad}) \cdot \sin(lng_{rad}))\right)\right)$$

$$y = \text{floor}\left(n * \left(\frac{1}{2} - \frac{1}{2\pi} \tan^{-1}\left(\frac{\tan(lat_{rad})}{\cos(lng_{rad})}\right)\right)\right)$$

---

Here, in the y-index formula for Polar Spatial ID, the use of atan requires care: to allow the Transverse Mercator projection used in Polar Spatial ID to represent almost the entire globe, the near-side hemisphere (relative to the prime meridian, i.e., longitude  $0^\circ \pm 85.0511^\circ$ ) and the far-side hemisphere (around longitude  $180^\circ \pm 85.0511^\circ$ ) must be handled separately. Specifically, the computation must be quadrant-aware, taking into account the signs of both the numerator and the denominator of atan's argument; in practice, use a two-argument arctangent such as atan2.<sup>4</sup>

---

<sup>4</sup> Many programming languages provide a function called atan2, a two-argument arctangent function. Given y (numerator) and x (denominator), it returns the arctangent of y/x in the correct quadrant. Note that the argument order varies by language or library, so be sure to check the documentation.