



KONICA MINOLTA

**KONICA MINOLTA AccurioPrint 2100
Security Target**

This document is a translation of the evaluated and certified security target written in Japanese.

Version 1.16

2022/05/25

KONICA MINOLTA, INC.

<Update History>

| Date | Ver | Department in charge | Approver | Confirmed by | Author | Updated contents |
|------------|------|--|----------|--------------|----------|----------------------|
| 2021/09/30 | 1.00 | PP system control development department | Haga | Yoshino | Yasukaga | First edition |
| 2021/10/15 | 1.01 | PP system control development department | Haga | Yoshino | Yasukaga | Correction of errors |
| 2021/11/30 | 1.02 | PP system control development department | Haga | Yoshino | Yasukaga | Correction of errors |
| 2021/12/13 | 1.03 | PP system control development department | Haga | Yoshino | Yasukaga | Correction of errors |
| 2022/01/05 | 1.04 | PP system control development department | Haga | Yoshino | Yasukaga | Correction of errors |
| 2022/01/06 | 1.05 | PP system control development department | Haga | Yoshino | Yasukaga | Correction of errors |
| 2022/01/21 | 1.06 | PP system control development department | Haga | Yoshino | Yasukaga | Correction of errors |
| 2022/02/16 | 1.07 | PP system control development department | Haga | Yoshino | Yasukaga | Correction of errors |
| 2022/02/21 | 1.08 | PP system control development department | Haga | Yoshino | Yasukaga | Correction of errors |
| 2022/03/04 | 1.09 | PP system control development department | Haga | Yoshino | Yasukaga | Correction of errors |
| 2022/03/25 | 1.10 | PP system control development department | Haga | Yoshino | Yasukaga | Correction of errors |
| 2022/04/08 | 1.11 | PP system control development department | Haga | Yoshida | Yasukaga | Correction of errors |
| 2022/04/14 | 1.12 | PP system control development department | Haga | Yoshida | Yasukaga | Correction of errors |
| 2022/04/19 | 1.13 | PP system control development department | Haga | Yoshida | Yasukaga | Correction of errors |
| 2022/04/20 | 1.14 | PP system control development department | Haga | Yoshida | Yasukaga | Correction of errors |
| 2022/04/21 | 1.15 | PP system control development department | Haga | Yoshida | Yasukaga | Correction of errors |
| 2022/05/25 | 1.16 | PP system control development department | Haga | Yoshida | Yasukaga | Correction of errors |
| | | | | | | |

Table of Contents

1. ST introduction 6

1.1. ST reference 6

1.2. TOE reference 6

1.3. TOE overview 6

 1.3.1. Type of TOE.....6

 1.3.2. Usage and key security features6

 1.3.3. Operating environment.....7

 1.3.4. Non-TOE hardware/software required for TOE.....8

1.4. TOE description.....8

 1.4.1. Physical scope of the TOE.....8

 1.4.2. Logical scope of the TOE..... 11

1.5. Term..... 13

2. Conformance claims 15

2.1. CC Conformance claims 15

2.2. PP claim 15

2.3. PP Conformance rationale..... 15

3. Security Problem Definition 16

3.1. Users 16

3.2. Assets..... 16

 3.2.1. User Data16

 3.2.2. TSF Data16

3.3. Threats 17

3.4. Organizational Security Policies 17

3.5. Assumptions 17

4. Security Objectives 19

4.1. Security Objectives for the Operational environment..... 19

5. Extended components definition 20

5.1. FAU_STG_EXT Extended: External Audit Trail Storage 20

5.2. FCS_CKM_EXT Extended: Cryptographic Key Management 20

5.3. FCS_IPSEC_EXT Extended: IPsec selected 21

5.4. FCS_KYC_EXT Extended: Cryptographic Operation (Key Chaining) 23

5.5. FCS_RBG_EXT Extended: Cryptographic Operation (Random Bit Generation)..... 24

5.6. FDP_DSK_EXT Extended: Protection of Data on Disk..... 25

5.7. FIA_PMG_EXT Extended: Password Management..... 25

5.8. FIA_PSK_EXT Extended: Pre-Shared Key Composition 26

5.9. FPT_KYP_EXT Extended: Protection of Key and Key Material..... 27

5.10. FPT_SKP_EXT Extended: Protection of TSF Data..... 28

5.11. FPT_TST_EXT Extended: TSF testing..... 29

5.12. FPT_TUD_EXT Extended: Trusted Update 29

6. Security Requirements 31

6.1. Security functional requirements 31

 6.1.1. Class FAU: Security audit31

 6.1.2. Class FCS: Cryptographic support.....32

 6.1.3. Class FDP: User data protection.....36

 6.1.4. Class FIA: Identification and authentication.....39

 6.1.5. Class FMT: Security management 41

| | |
|---|-----------|
| 6.1.6. Class FPT: Protection of the TSF | 44 |
| 6.1.7. Class FTA: TOE access | 45 |
| 6.1.8. Class FTP: Trusted path/channels | 45 |
| 6.1.9. Class FPT: Protection of the TSF | 47 |
| 6.1.10. Class FCS: Cryptographic support..... | 47 |
| 6.1.11. Class FDP: User data protection..... | 47 |
| 6.1.12. Class FCS: Cryptographic support..... | 48 |
| 6.1.13. Class FCS: Cryptographic support..... | 49 |
| 6.1.14. Class FCS: Cryptographic support..... | 51 |
| 6.1.15. Class FIA: Identification and authentication..... | 51 |
| 6.1.16. Class FCS: Cryptographic support..... | 52 |
| 6.2. Security assurance requirements | 52 |
| 6.3. Security requirements rationale..... | 53 |
| 6.3.1. The dependencies of security requirements..... | 53 |
| 7. TOE Summary specification..... | 56 |
| 7.1. Identification and authentication function | 56 |
| 7.2. Access control function | 58 |
| 7.3. Storage encryption function | 59 |
| 7.4. Trusted communications function | 63 |
| 7.5. Security management function..... | 66 |
| 7.6. Audit function..... | 67 |
| 7.7. Software update verification function..... | 69 |
| 7.8. Self-testing function | 70 |

Table of figures

| | |
|---------------------------------------|----|
| Figure 1-1 Use of TOE | 7 |
| Figure 1-2 Physical scope of TOE..... | 9 |
| Figure 1-3 Logical scope of TOE..... | 11 |

Table of Contents

| | |
|--|----|
| Table 1-1 Evaluated Configuration | 8 |
| Table 1-2 configuration | 9 |
| Table 1-3 TOE firmware configuration | 10 |
| Table 1-4 Guidance List | 10 |
| Table 1-5 Components of TOE..... | 11 |
| Table 1-6 Basic functions of TOE | 11 |
| Table 1-7 Security function of TOE | 12 |
| Table 1-8 Terms | 13 |
| Table 3-1 User Categories | 16 |
| Table 3-2 Asset categories | 16 |
| Table 3-3 User Data Type..... | 16 |
| Table 3-4 TSF Data | 16 |
| Table 3-5 Threats for the TOE..... | 17 |
| Table 3-6 Organizational Security Policies for the TOE..... | 17 |
| Table 3-7 Assumptions for the TOE..... | 18 |
| Table 4-1 Security Objectives for the Operational environment..... | 19 |
| Table 6-1 Audit data requirements | 31 |

| | |
|--|----|
| Table 6-2 D.USER.DOC Access Control SFP | 37 |
| Table 6-3 D.USER.JOB Access Control SFP..... | 38 |
| Table 6-4 Authentication failure handling..... | 39 |
| Table 6-5 Management of Security Functions behavior | 42 |
| Table 6-6 Management of Object Security Attribute | 42 |
| Table 6-7 Operation of TSF Data (1) | 43 |
| Table 6-8 Operation of TSF Data (2) | 43 |
| Table 6-9 Operation of TSF Data (3) | 43 |
| Table 6-10 list of management functions | 43 |
| Table 6-11 TOE Security Assurance Requirements | 52 |
| Table 6-12 The dependencies of security requirements | 53 |
| Table 7-1 List of Security Functions | 56 |
| Table 7-2 Special Characters Available for Passwords | 57 |
| Table 7-3 Cryptographic algorithm | 59 |
| Table 7-4 Encryption Key for Storage Encryption..... | 60 |
| Table 7-5 Data to be encrypted for each device (field-replaceable nonvolatile storage device) | 61 |
| Table 7-6 Data to be encrypted for each device (other than field-replaceable nonvolatile storage device) | 61 |
| Table 7-7 Storage and destruction of keys | 63 |
| Table 7-8 Reliable path (FTP_TRP.1(a)) available to the administrator..... | 64 |
| Table 7-9 Encrypted communication provided by TOE..... | 64 |
| Table 7-10 Destination and Destination of Key | 66 |
| Table 7-11 Administrative functions provided to U.ADMIN | 66 |
| Table 7-12 Administrative functions provided to U.NORMAL | 67 |
| Table 7-13 List of Audited Events..... | 67 |
| Table 7-14 Audit Log Information Specifications..... | 69 |

1. ST introduction

1.1. ST reference

- ST name : KONICA MINOLTA AccurioPrint 2100 Security Target
- ST version : 1.16
- Creation date : May 25, 2022
- Author : KONICA MINOLTA, INC.

1.2. TOE reference

- TOE name : KONICA MINOLTA AccurioPrint 2100
- Version : GM2-10

The TOE consists of the main unit (KONICA MINOLTA AccurioPrint 2100, firmware version GM2-10). The TOE version GM2-10 consists of the combination of the firmware type and version name listed in Table1-3, which is the information to identify the firmware.

KONICA MINOLTA AccurioPrint 2100 can be purchased in Japan and overseas, but the TOE evaluation is performed only for domestic use. There are some differences in the overseas version, such as the English version of the accompanying guidance and the different language setting of the operation panel.

1.3. TOE overview

This TOE is a digital multifunction device (hereinafter referred to as MFP) used in a commercial information processing environment where medium document security, network security, and information assurance are basically required. This environment typically handles confidential and non-confidential information that is handled in day-to-day business operations.

1.3.1. Type of TOE

TOE is an MFP used in the network environment (LAN) and has a function for copy, scan, print, and store and retrieve documents. This TOE does not have a fax function.

1.3.2. Usage and key security features

The TOE is connected to a LAN and has functions that allow users to scan, copy, print, and store and retrieve documents. In addition, the following security features are provided to protect user documents and security-related data: Identification and authentication function that identifies users and allows only authorized users to use the TOE. Access control function that restricts access to documents and various TOE operations according to the authority given to the user. Security management function that restricts security function settings to users with administrator privileges. Audit function that records security-related events and sends them to a log server. Trusted communications function that protects the communication between the TOE and external IT devices by IPsec. Storage encryption function that encrypts the data recorded on HDD / SSD. Software update verification function that prevents updates due to unauthorized firmware. Self-testing function that demonstrates the normal operation of TSF.

1.3.3. Operating environment

Figure 1-1 shows the TOE operation environment. TOE is connected to the LAN. The user can operate the TOE by communicating via the TOE's operation panel or LAN.

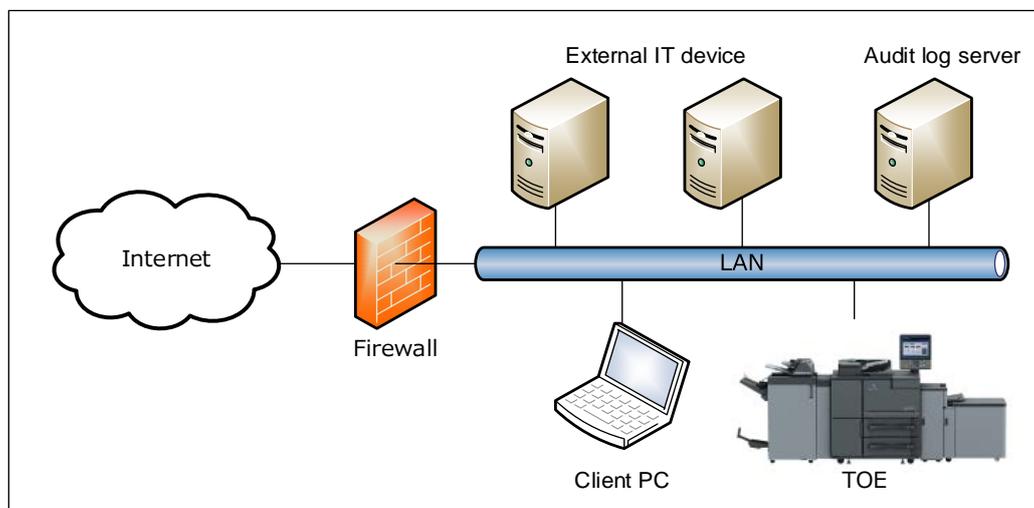


Figure 1-1 Use of TOE

(1) TOE (MFP body)

TOE is connected to the office LAN. The user can perform the following processing from the operation panel.

- Various settings of TOE
- Copy of paper documents, storage as electronic documents, and network transmission
- Printing and deleting stored documents

(2) LAN

The network used in the TOE installation environment.

(3) Firewall

Device to prevent network attacks from the Internet to the in-office LAN.

(4) Client PC

The web browser software can be used to access TOE from the client PC and perform the following operations.

- Web Connection (after administrator authentication, TOE's firmware version can be viewed on the browser)

Users can access TOE from a client PC by installing a printer driver on the client PC to perform the following operations.

- Storing and printing electronic documents

(5) Audit log server

The server to which the TOE audit function is to be sent. The user can specify the syslog server as the destination for audit log information.

(6) External IT device (to which electronic documents are sent)

An external IT device to which electronic documents are sent. The user can specify a WebDAV server, an SMB server, or an FTP server as the destination.

1.3.4. Non-TOE hardware/software required for TOE

The configuration used to evaluate TOE as the hardware/software required for using TOE is shown below.

Table 1-1 Evaluated Configuration

| Hardware/software | Versions used in the evaluation |
|-------------------|--|
| Client PC (OS) | Windows 10 Pro |
| Web browser | Microsoft Edge 93 |
| Printer driver | KONICA MINOLTA AccurioPrint 2100 PS Plug-in driver Ver 1.0.562 KONICA MINOLTA AccurioPrint 2100 PCL driver Ver1.0.3.0 |
| IPsec | Built-in operating system |
| Audit log server | Rsyslog 8.1901.0 |
| IPsec | Strongswan 5.8.0 |
| FTP server | Vsftpd 3.0.3 |
| IPsec | Strongswan 5.8.0 |
| WebDAV server | Apache2 2.4.38 |
| IPsec | Strongswan 5.8.0 |
| SMB server | Samba 4.9.5 |
| IPsec | Strongswan 5.8.0 |

1.4. TOE description

This chapter outlines the physical and logical scope of the TOE.

1.4.1. Physical scope of the TOE

1.4.1.1. Physical configuration of TOE

As shown in the figure below, the TOE physical scope is an MFP consisting of an operation panel, scanner unit, printer unit, control board, HDD/SSD, USB I/F, and Network I/F.

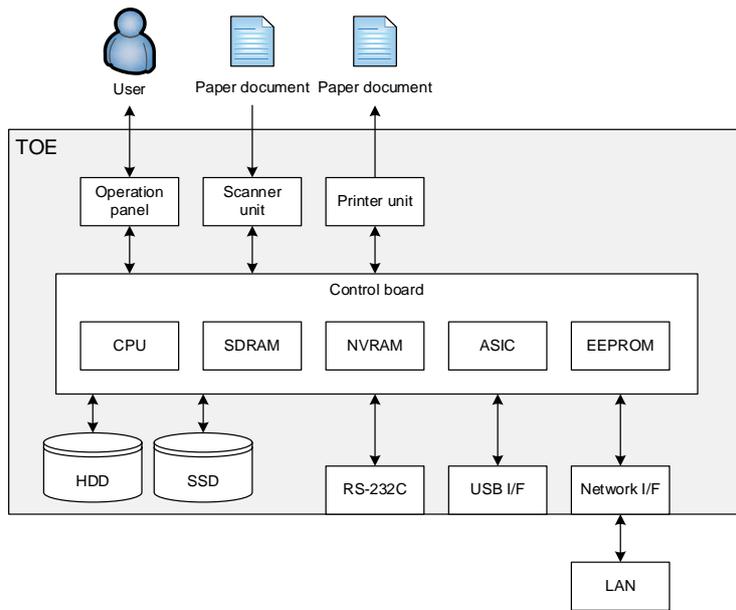


Figure 1-2 Physical scope of TOE

Table 1-2 configuration

| No. | Function | Definition |
|-----|-----------------|---|
| 1 | Operation panel | A device for operating TOE with a touch panel liquid crystal display and hardware keys such as start and stop keys. |
| 2 | Scanner unit | A device for reading figures and pictures from paper and converting them into electronic data. |
| 3 | Printer unit | A device for printing and outputting image data converted for printing by instructions from a control board. |
| 4 | Control board | A device that controls TOE. |
| 5 | CPU | Central processing unit |
| 6 | RAM | Volatile memory used as a working area. |
| 7 | ASIC | Integrated circuit for specific use that incorporates the compression deployment function of image data. |
| 8 | NVRAM | A non-volatile memory in which setting data or TSF data that determines the operation of the TOE are stored. |
| 9 | EEPROM | Semiconductor storage that stores the encryption key (KEK). It is not a field-replaceable nonvolatile storage device. The device is mounted directly on a substrate and cannot be detached. |
| 10 | HDD- SSD | It is used as a field-replaceable nonvolatile storage device for storing image data, temporary image data, and work area. |
| 11 | RS-232C I/F | An interface that can be serially connected. It can be used for the remote diagnostic function (CS Remote Care) by connecting to a modem connected to a public line, but its use is prohibited in TOE. |
| 12 | Network I/F | An interface that supports 10BASE-T, 100BASE-TX, and Gigabit Ethernet. |
| 13 | USB I/F | A USB interface that connects operation devices such as a keyboard and a mouse and USB memory and rewrites firmware and stores and retrieves image data. However, the use of USB devices is prohibited in TOE |

| No. | Function | Definition |
|-----|----------|--|
| | | (excluding the use of USB memory in the firmware update function). |

1.4.1.2. TOE's firmware configuration

The TOE firmware components are as follows.

Table 1-3 TOE firmware configuration

| Type of firmware | ROM type | Definition | Version name (GM2-10 configuration FW) |
|------------------------|----------|--|---|
| Image control system/1 | I1 | Image Control Processing and Operation Part Control | ADF20Y0-00I1-GM2-10 |
| Image control system/2 | I2 | As above | ADF20Y0-00I2-G00-10 |
| Image control system/3 | I3 | As above | ADF20Y0-00I3-GM0-10 |
| Image control system/4 | I4 | As above | ADF20Y0-00I4-G00-10 |
| Image control system/5 | I5 | As above | ADF20Y0-00I5-GM0-10 |
| ADF system | F | Automatic document feeder control | A84K0Y0-00F1-G00-01 |
| Sound source system | T | Audio data of the control unit | ADF20Y0-00T1-G00-10 |
| Browser feature | W | Browser processing | ADF20Y0-00W1-G00-10 |
| Scanner | L | Scanner substrate processing | A85C0Y0-00L1-G00-20 |
| Printer system | C | Print control | ADF20Y0-00C1-G00-10 |
| Network control | P1 | Network control processing | ADF20Y0-00P1-GM0-10 |
| Network control | P2 | Network control processing | ADF2011-00P2-G00-10 |

1.4.1.3. Guidance

The following is a list of guidance. Guidance for general users (User's Guide) is provided by the dealer to the user in the form of html file by contacting the URL to which the manual should be referred. In addition, guidance on security functions (User's Guide Security Function) is provided by the dealer to the user using portable storage media in the format of an exe file.

Table 1-4 Guidance List

| Name | Ver. | Supplement |
|--|---------------------|------------------|
| KONICA MINOLTA AccurioPrint 2100 User's Guide | 01.00.00 | Japanese version |
| KONICA MINOLTA AccurioPrint 2100 User's Guide Security Functions (Administrator) | 1.0 (2022-05-20) | Japanese version |
| KONICA MINOLTA AccurioPrint 2100 User's Guide Security Functions (Users) | 1.0 (2022-04-21) | Japanese version |

1.4.1.4. Identification of the TOE components

The components of the TOE are as follows.

Identification of the MFP body constituting the TOE is as follows.

The MFP main unit is in a format that incorporates the hardware and firmware constituting the TOE, and is provided to the user by the dealer with a technician who performs the initialization.

Table 1-5 Components of TOE

| Component | Identification | FW version |
|---------------|----------------------------------|-------------------|
| MFP main unit | KONICA MINOLTA AccurioPrint 2100 | FW version GM2-10 |

1.4.2. Logical scope of the TOE

The security functions and basic functions of TOE are described below.

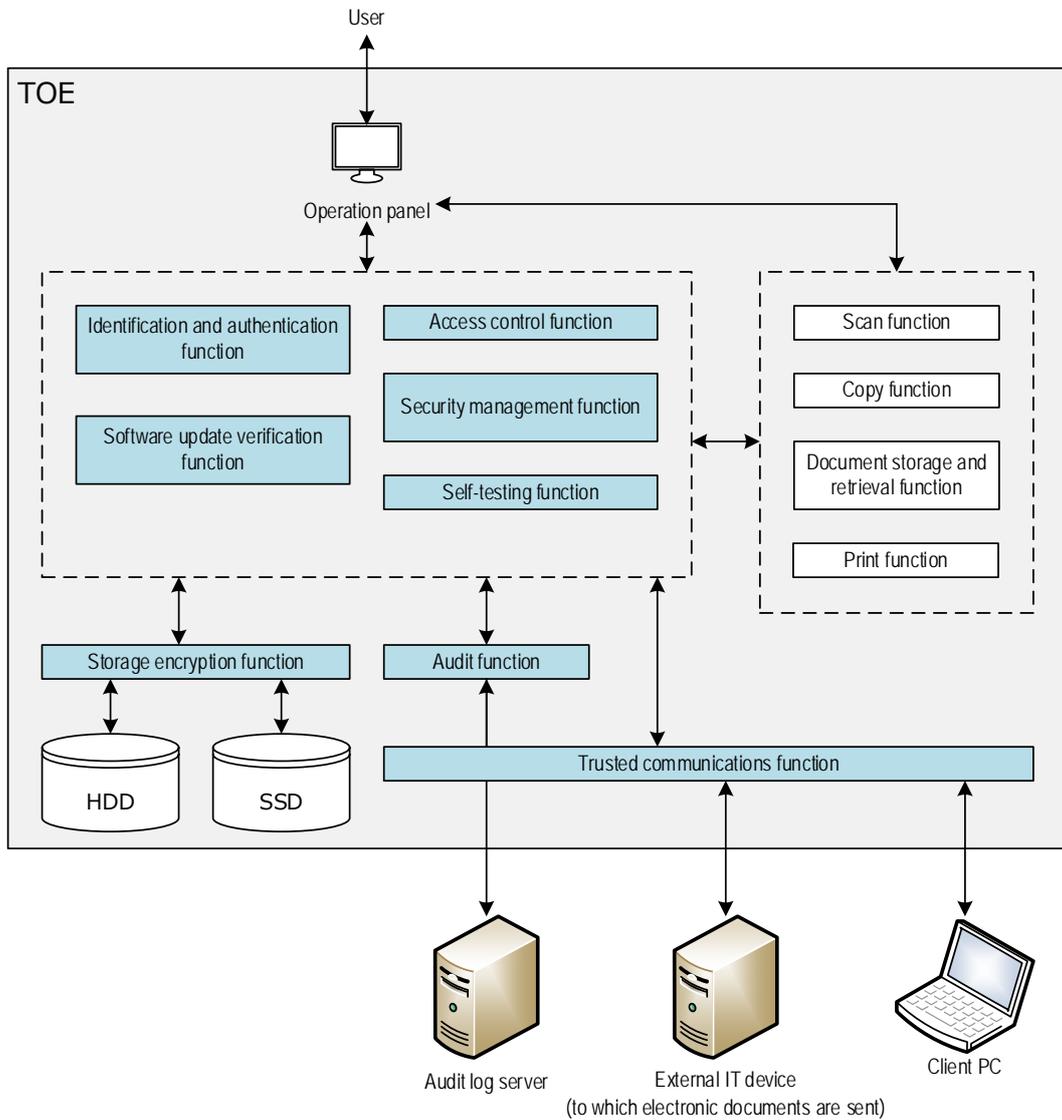


Figure 1-3 Logical scope of TOE

1.4.2.1. Basic functions

TOE has the following basic functions.

Table 1-6 Basic functions of TOE

| No. | Function | Definition |
|-----|---------------|---|
| 1 | Scan function | Ability to read paper documents, generate electronic documents, and send them to external IT devices (WebDAV servers, SMB servers, FTP servers) by manipulating |

| | | |
|---|---|--|
| | | the user's operation panel |
| 2 | Copy function | A function that reads a paper document, generates an electronic document, and prints a copy of the document or saves it in the HDD by the user's operation from the operation panel. |
| 3 | Document storage and retrieval function | This is a function to read paper documents, generate electronic documents, store them on an HDD, or extract stored electronic documents from an HDD and print them. Stored electronic documents can be modified or deleted. |
| 4 | Print function | A function for security printing of document data received from client PCs via LAN. |

1.4.2.2. Security function

The security functions of TOE are described below.

Table 1-7 Security function of TOE

| No. | Function | Definition |
|-----|--|--|
| 1 | Identification and authentication function | A function to verify that a person who intends to use the TOE is an authorized user using identification and authentication information obtained from the user, and to permit the use of the TOE only to a person who is determined to be an authorized user. Only the main unit authentication method in which TOE itself performs identification and authentication can be used for the authentication method. This function includes the following functions. - Function to suspend authentication for a certain period of time when authentication fails on the operation panel or web browser (when Web Connection is used). - When a user authentication fails (three times in a row) when receiving an electronic document output by the printer driver, the user's account is locked and authentication is disabled. - Function to display the entered password in dummy characters at login - Ability to register only the password that meets the minimum password length conditions set by the administrator to protect password quality - Function to terminate the session at the operation panel if there is no operation for a certain period of time by the user who has been identified and authenticated. |
| 2 | Access control function | A function that restricts access to protected assets in the TOE so that only authorized users can access them. |
| 3 | Storage encryption function | Function to encrypt data stored on HDDs and SSDs to protect them from leakage. |
| 4 | Trusted communications function | A function to prevent information leakage due to wiretapping on a network when using a LAN. Communication data between the client PC and the TOE and communication data between the audit log server and external IT devices (servers that can be used as a destination for sending electronic documents; WebDAV server, SMB server, and FTP server) and the TOE is encrypted by IPsec communication. |
| 5 | Security management function | A function that controls the operation of TSF data and controls the behavior of security functions on the basis of the privileges given to the user's role or the privileges given to each user to authorized users of TOE that are authenticated by the identification and authentication function. These include settings for security enhancement, user creation/password changes, audit log server settings, and date and time changes. |
| 6 | Audit function | A function to send logs of events related to TOE use and security (hereinafter |

| | | |
|---|---------------------------------------|---|
| | | referred to as audit events) to an external audit log server together with date and time information. |
| 7 | Software update verification function | Function to perform Digital Signature Verification to ensure the authenticity of firmware before executing firmware updates for TOE |
| 8 | Self-testing function | This is a function to verify that the TSF execution firmware is normal when the TOE starts. |

1.5. Term

The following abbreviations and terms are used in this ST.

Table 1-8 Terms

| Designation | Definition |
|------------------------------|--|
| Electronic document | Electronic documents are electronic data that convert information such as images, letters, and graphics into electronic data. |
| Paper documents | Paper documents are paper documents that contain information such as images, letters, and graphics. |
| Operation panel | The operation panel is the name of the touch panel display and operation button attached to the AccurioPrint 2100 enclosure. |
| SMB | An SMB is an application protocol that enables computers to communicate with each other on a network in a Microsoft operating system. |
| User | A general user whose user name and login password are registered in TOE by the administrator. User ID is associated with successful login identification and authentication function. |
| Administrator | Users who know the administrator password. Associated with Admin ID by successful identification and authentication function required when administrator function is used. |
| Service mode | Setup screens for service engineers (hereinafter referred to as CE) who are engineers to install, maintain, and repair TOE. Functions such as fine tuning of a device such as a storage medium or a scanner print can be performed. The service mode can be checked and changed only from the operation panel. However, this function can be disabled by setting the service login permission setting function (administrator can configure this function). |
| SC code | Error codes displayed on the operation panel when a significant software or hardware error occurs. When the SC code is displayed, the TOE stops the operation and moves to the state where the operation is not accepted. When this code appears, the administrator is guided to call the service engineer. |
| Network Management Functions | This is a function that can be used after an administrator's identification and authentication via the network (remote management function). It includes the Internet ISW function (function to rewrite TOE from an external server using the Internet) and Web Connection (function to change the setting of TOE and check the status using the web browser). When the security enhancement setting is enabled, only the firmware version check function of the Web Connection is available, and other functions are not available. |
| FTP transmission | Function to upload electronic documents to an FTP server. |
| SMB transmission | The ability to send electronic documents to shared folders on computers and servers. |
| WebDAV transmission | The ability to upload electronic documents to a WebDAV server. |
| Auto reset | This function automatically logs out when there is no access at the predetermined auto reset |

| Designation | Definition |
|---------------------------------|--|
| | time during login. |
| Autoreset time | When this time has elapsed, the system automatically logs out. The operation from the operation panel is targeted. |
| Job | Document processing tasks sent to the hardcopy device. A single processing task can process more than one document. |
| Security enhancement settings | This is a function to set the settings related to the behavior of the security function in a secure value and to maintain those settings. By enabling this function, the use of TOE update function via the network, network setting function with low security level, etc. is prohibited, or a warning screen is displayed when using this function. In addition, a warning screen is displayed when changing the set value, and when changing the set value (only the administrator can execute it), the security enhancement setting is disabled. The TOE environment is only enabled when the security enhancement setting is enabled. |
| User ID | Identifier assigned to the general user. The TOE identifies the user by its identifier. |
| Admin ID | Identifier assigned to the administrator. The TOE identifies the user by its identifier. |
| User management | This function registers, changes, and deletes users. |
| Authenticating user identities | Function to authenticate TOE users. There are three types of authentication: main unit authentication, intermediate authentication, and external authentication. Only main unit authentication can be used when the security enhancement setting is valid. |
| Login | Execute identification and authentication in TOE using the username and login password. |
| Audit function | This function generates and records an audit log for the event to be audited and sends the log to the log server. |
| Trusted communications function | A function to encrypt and protect data to be exchanged via a LAN. |
| Security Printing | A function to store electronic documents on HDD. Printing output can be performed from the screen displaying a list of confidential jobs on the operation panel. |
| Temporary Storage | A function to save electronic documents to HDD. Print output is available from the list of temporarily saved jobs display screen on the operation panel. Since there is no mechanism to organize jobs such as folders, this function is mainly used to save jobs for a short period of time. |
| HDD Storage | A function to save electronic documents to HDD. Print output is available from the HDD stored job list display screen on the operation panel. Unlike the temporary storage function, this function is mainly used for long-term job storage because jobs can be stored in user-created folders. |
| Firmware | This software has the function of basic control of TOE and its peripheral equipment (finisher), and TOE consists of multiple firmware. This control firmware and controller firmware are used to realize the TSF function. |
| Firmware update | A function to update firmware using update data obtained through a network or USB memory. Only updates using USB memory can be performed when the security enhancement setting is enabled. Also called ISW. |

2. Conformance claims

2.1. CC Conformance claims

This ST conforms to the following Common Criteria (hereinafter referred to as CC).

CC version : Version 3.1 Release 5
CC conformance : Part2 (CCMB-2017-04-002) Extended,
And Part3 (CCMB-2017-04-003) Conformant

2.2. PP claim

This ST conforms to the following PP.

PP identification :
PP Title : Protection Profile for Hardcopy Devices
PP registration :
PP version : 1.0 dated September 10, 2015
Date : September 10, 2015
Errata : Protection Profile for Hardcopy Devices - v1.0 Errata #1, June 2017

2.3. PP Conformance rationale

The following conditions requested by PP are met and "Exact Conformance" is as requested by PP. Therefore, the TOE type is consistent with PP.

- Required Uses
Printing, Scanning, Copying, Network communications, Administration
- Conditionally Mandatory Uses
Storage and retrieval, Field-Replaceable Nonvolatile Storage
- Optional Uses
None

3. Security Problem Definition

This chapter describes the definition, assumptions, threats, and organisational security policies of users and properties to be protected.

3.1. Users

TOE users are classified as follows.

Table 3-1 User Categories

| Designation | Asset category | Definition |
|-------------|----------------|---|
| U.NORMAL | Normal User | A User who has been identified and authenticated and does not have an administrative role |
| U.ADMIN | Administrator | A User who has been identified and authenticated and has an administrative role |

3.2. Assets

Protected assets are User Data, TSF Data. Each asset is defined as follows:

Table 3-2 Asset categories

| Designation | Asset category | Definition |
|-------------|----------------|--|
| D.USER | User Data | Data created by and for Users that do not affect the operation of the TSF |
| D.TSF | TSF Data | Data created by and for the TOE that might affect the operation of the TSF |

3.2.1. User Data

User Data consists of the following two types.

Table 3-3 User Data Type

| Designation | User Data Type | Definition |
|-------------|--------------------|--|
| D.USER.DOC | User Document Data | Information contained in a User's Document, in electronic or hardcopy form |
| D.USER.JOB | User Job Data | Information related to a User's Document or Document Processing Job |

3.2.2. TSF Data

TSF Data consists of the following two types:

Table 3-4 TSF Data

| Designation | TSF Data type | Definition |
|-------------|-----------------------|---|
| D.TSF.PROT | Protected TSF Data | TSF Data for which alteration by a User who is neither the data owner nor in an Administrator role might affect the security of the TOE, but for which disclosure is acceptable |
| D.TSF.CONF | Confidential TSF Data | TSF Data for which either disclosure or alteration by a User who is neither the data owner nor in an Administrator role might affect the security of the |

| | | |
|--|--|-----|
| | | TOE |
|--|--|-----|

3.3. Threats

This section describes threats to assets described in clause in 3.2.

Table 3-5 Threats for the TOE

| Designation | Definition |
|-----------------------|--|
| T.UNAUTHORIZED_ACCESS | An attacker may access (read, modify, or delete) User Document Data or change (modify or delete) User Job Data in the TOE through one of the TOE's interfaces. |
| T.TSF_COMPROMISE | An attacker may gain Unauthorized Access to TSF Data in the TOE through one of the TOE's interfaces. |
| T.TSF_FAILURE | A malfunction of the TSF may cause loss of security if the TOE is permitted to operate while in a degraded state. |
| T.UNAUTHORIZED_UPDATE | An attacker may cause the installation of unauthorized software on the TOE. |
| T.NET_COMPROMISE | An attacker may access data in transit or otherwise compromise the security of the TOE by monitoring or manipulating network communication. |

3.4. Organizational Security Policies

This section describes the Organizational Security Policies (OSPs) that apply to the TOE. OSPs are used to provide a basis for Security Objectives that are commonly desired by TOE Owners in this operational environment but for which it is not practical to universally define the assets being protected or the threats to those assets.

Table 3-6 Organizational Security Policies for the TOE

| Designation | Definition |
|----------------------|---|
| P.AUTHORIZATION | Users must be authorized before performing Document Processing and administrative functions. |
| P.AUDIT | Security-relevant activities must be audited and the log of such actions must be protected and transmitted to an External IT Entity. |
| P.COMMUNICATION | The TOE must be able to identify itself to other devices on the LAN. |
| P.STORAGE_ENCRYPTION | If the TOE stores User Document Data or Confidential TSF Data on Field-Replaceable Nonvolatile Storage Devices, it will encrypt such data on those devices. |
| P.KEY_MATERIAL | Cleartext keys, submasks, random numbers, or any other values that contribute to the creation of encryption keys for Field-Replaceable Nonvolatile Storage of User Document Data or Confidential TSF Data must be protected from unauthorized access and must not be stored on that storage device. |

3.5. Assumptions

The Security Objectives and Security Functional Requirements defined in subsequent sections of this Protection Profile are based on the condition that all of the assumptions described in this section are satisfied.

Table 3-7 Assumptions for the TOE

| Designation | Definition |
|--------------------|--|
| A.PHYSICAL | Physical security, commensurate with the value of the TOE and the data it stores or processes, is assumed to be provided by the environment. |
| A.NETWORK | The Operational Environment is assumed to protect the TOE from direct, public access to its LAN interface. |
| A.TRUSTED_ADMIN | TOE Administrators are trusted to administer the TOE according to site security policies. |
| A.TRAINED_USERS | Authorized Users are trained to use the TOE according to site security policies. |

4. Security Objectives

4.1. Security Objectives for the Operational environment

This section describes the Security Objectives that must be fulfilled in the operational environment of the TOE.

Table 4-1 Security Objectives for the Operational environment

| Designation | Definition |
|------------------------|--|
| OE.PHYSICAL_PROTECTION | The Operational Environment shall provide physical security, commensurate with the value of the TOE and the data it stores or processes. |
| OE.NETWORK_PROTECTION | The Operational Environment shall provide network security to protect the TOE from direct, public access to its LAN interface. |
| OE.ADMIN_TRUST | The TOE Owner shall establish trust that Administrators will not use their privileges for malicious purposes. |
| OE.USER_TRAINING | The TOE Owner shall ensure that Users are aware of site security policies and have the competence to follow them. |
| OE.ADMIN_TRAINING | The TOE Owner shall ensure that Administrators are aware of site security policies and have the competence to use manufacturer's guidance to correctly configure the TOE and protect passwords and keys accordingly. |

5. Extended components definition


This chapter defines the extended security functional requirements. All extension requirements are defined in HCD-PP.

5.1. FAU_STG_EXT Extended: External Audit Trail Storage

Family Behavior:

This family defines requirements for the TSF to ensure that secure transmission of audit data from TOE to an External IT Entity.

Component leveling:



FAU_STG_EXT.1 External Audit Trail Storage requires the TSF to use a trusted channel implementing a secure protocol.

Management:

The following actions could be considered for the management functions in FMT:

- The TSF shall have the ability to configure the cryptographic functionality.

Audit:

The following actions should be auditable if FAU_GEN Security Audit Data Generation is included in the PP/ST:

- There are no auditable events foreseen.

FAU_STG_EXT.1 Extended: Protected Audit Trail Storage

Hierarchical to : No other components
 Dependencies : FAU_GEN.1 Audit data generation,
 FTP_ITC.1 Inter-TSF trusted channel

FAU_STG_EXT.1.1 The TSF shall be able to transmit the generated audit data to an External IT Entity using a trusted channel according to FTP_ITC.1.

Rationale:

The TSF is required that the transmission of generated audit data to an External IT Entity which relies on a non-TOE audit server for storage and review of audit records. The storage of these audit records and the ability to allow the administrator to review these audit records is provided by the Operational Environment in that case. The Common Criteria does not provide a suitable SFR for the transmission of audit data to an External IT Entity.


This extended component protects the audit records, and it is therefore placed in the FAU class with a single component.

5.2. FCS_CKM_EXT Extended: Cryptographic Key Management

Family Behavior:

This family addresses the management aspects of cryptographic keys. Especially, this extended component is intended for cryptographic key destruction.

Component leveling:



FCS_CKM_EXT.4 Cryptographic Key Material Destruction ensures not only keys but also key materials that are no longer needed are destroyed by using an approved method.

Management:

The following actions could be considered for the management functions in FMT:

- There are no management actions foreseen.

Audit:

The following actions should be auditable if FAU_GEN Security Audit Data Generation is included in the PP/ST:

- There are no auditable events foreseen.

FCS_CKM_EXT.4 Extended: Cryptographic Key Material Destruction

- Hierarchical to : No other components
- Dependencies : [FCS_CKM.1(a) Cryptographic Key Generation (for asymmetric keys), or FCS_CKM.1(b) Cryptographic key generation (Symmetric Keys)], FCS_CKM.4 Cryptographic key destruction

FCS_CKM_EXT.4.1 The TSF shall destroy all plaintext secret and private cryptographic keys and cryptographic critical security parameters when no longer needed.

Rationale:

Cryptographic Key Material Destruction is to ensure the keys and key materials that are no longer needed are destroyed by using an approved method, and the Common Criteria does not provide a suitable SFR for the Cryptographic Key Material Destruction.


This extended component protects the cryptographic key and key materials against exposure, and it is therefore placed in the FCS class with a single component.

5.3. FCS_IPSEC_EXT Extended: IPsec selected

Family Behavior:

This family addresses requirements for protecting communications using IPsec.

Component leveling:



FCS_IPSEC_EXT.1 IPsec requires that IPsec be implemented as specified.

Management:

The following actions could be considered for the management functions in FMT:

- There are no management actions foreseen.

Audit:

The following actions should be auditable if FAU_GEN Security Audit Data Generation is included in the PP/ST:

- Failure to establish an IPsec SA

FCS_IPSEC_EXT.1**Extended: IPsec selected**

Hierarchical to : No other components
 Dependencies : FIA_PSK_EXT.1 Extended:Pre-Shared Key Composition
 FCS_CKM.1(a) Cryptographic Key Generation (for asymmetric keys)
 FCS_COP.1(a) Cryptographic Operation (Symmetric Encryption/decryption)
 FCS_COP.1(b) Cryptographic Operation (for signature Generation/verification)
 FCS_COP.1(c) Cryptographic Operation (Hash Algorithm)
 FCS_COP.1(g) Cryptographic Operation (for keyed-hash message authentication)
 FCS_RBG_EXT.1 Extended: Cryptographic Operation (Random Bit

- FCS_IPSEC_EXT.1.1 The TSF shall implement the IPsec architecture as specified in RFC 4301.
- FCS_IPSEC_EXT.1.2 The TSF shall implement [selection: tunnel mode, transport mode].
- FCS_IPSEC_EXT.1.3 The TSF shall have a nominal, final entry in the SPD that matches anything that is otherwise unmatched, and discards it.
- FCS_IPSEC_EXT.1.4 The TSF shall implement the IPsec protocol ESP as defined by RFC 4303 using [selection: the cryptographic algorithms AES-CBC-128 (as specified by RFC 3602) together with a Secure Hash Algorithm (SHA)-based HMAC, AES-CBC-256 (as specified by RFC 3602) together with a Secure Hash Algorithm (SHA)-based HMAC, AES-GCM-128 as specified in RFC 4106, AES-GCM-256 as specified in RFC 4106].
- FCS_IPSEC_EXT.1.5 The TSF shall implement the protocol: [selection: IKEv1, using Main Mode for Phase 1 exchanges, as defined in RFCs 2407, 2408, 2409, RFC 4109, [selection: no other RFCs for extended sequence numbers, RFC 4304 for extended sequence numbers], and [selection: no other RFCs for hash functions, RFC 4868 for hash functions]; IKEv2 as defined in RFCs 5996, [selection: with no support for NAT traversal, with mandatory support for NAT traversal as specified in section 2.23], and [selection: no other RFCs for hash functions, RFC 4868 for hash functions]].
- FCS_IPSEC_EXT.1.6 The TSF shall ensure the encrypted payload in the [selection: IKEv1, IKEv2] protocol uses the cryptographic algorithms AES-CBC-128, AES-CBC-256 as specified in RFC 3602 and [selection: AES-GCM-128, AES-GCM-256 as specified in RFC 5282, no other algorithm].
- FCS_IPSEC_EXT.1.7 The TSF shall ensure that IKEv1 Phase 1 exchanges use only main mode.
- FCS_IPSEC_EXT.1.8 The TSF shall ensure that [selection: IKEv2 SA lifetimes can be established based on [selection: number of packets/number of bytes; length of time, where the time values can be limited to: 24 hours for Phase 1 SAs and 8 hours for Phase 2 SAs]; IKEv1 SA lifetimes can be established based on [selection: number of packets/number of bytes ; length of time, where the time values can be limited to: 24 hours for Phase 1 SAs and 8 hours for Phase 2 SAs]].
- FCS_IPSEC_EXT.1.9 The TSF shall ensure that all IKE protocols implement DH Groups 14 (2048-bit MODP), and [selection: 24 (2048-bit MODP with 256-bit POS), 19 (256-bit Random ECP), 20 (384-bit Random ECP, 5 (1536-bit MODP)), [assignment: other DH groups that are implemented by the TOE], no other

FCS_IPSEC_EXT.1.10 DH groups].
 The TSF shall ensure that all IKE protocols perform Peer Authentication using the [selection: RSA, ECDSA] algorithm and Pre-shared Keys.

Rationale:

IPsec is one of the secure communication protocols, and the Common Criteria does not provide a suitable SFR for the communication protocols using cryptographic algorithms.


This extended component protects the communication data using cryptographic algorithms, and it is therefore placed in the FCS class with a single component.

5.4. FCS_KYC_EXT Extended: Cryptographic Operation (Key Chaining)

Family Behavior:

This family provides the specification to be used for using multiple layers of encryption keys to ultimately secure the protected data encrypted on the storage.

Component leveling:



FCS_KYC_EXT Key Chaining, requires the TSF to maintain a key chain and specifies the characteristics of that chain.

Management:

The following actions could be considered for the management functions in FMT:

- There are no management actions foreseen.

Audit:

The following actions should be auditable if FAU_GEN Security Audit Data Generation is included in the PP/ST:

- There are no auditable events foreseen.

FCS_KYC_EXT.1 Extended: Key Chaining

Hierarchical to : No other components.
 Dependencies : [FCS_COP.1(e) Cryptographic operation (Key Wrapping), FCS_SMC_EXT.1 Extended: Submask Combining, FCS_COP.1(f) Cryptographic operation (Key Encryption), FCS_KDF_EXT.1 Cryptographic Operation (Key Derivation), and/or FCS_COP.1(i) Cryptographic operation (Key Transport)]

FCS_KYC_EXT.1.1 The TSF shall maintain a key chain of: [selection: one, using a submask as the BEV or DEK; intermediate keys originating from one or more submask(s) to the BEV or DEK using the following method(s): [selection: key wrapping as specified in FCS_COP.1(e), key combining as specified in FCS_SMC_EXT.1, key encryption as specified in FCS_COP.1(f), key derivation as specified in FCS_KDF_EXT.1, key transport as specified in FCS_COP.1(i)]] while maintaining an effective strength of [selection: 128 bits, 256 bits].

Rationale:

Key Chaining ensures that the TSF maintains the key chain, and also specifies the characteristics of that chain. However, the Common Criteria does not provide a suitable SFR for the management of multiple layers of encryption key to protect encrypted data.


This extended component protects the TSF data using cryptographic algorithms, and it is therefore placed in the FCS class with a single component.

5.5. FCS_RBG_EXT Extended: Cryptographic Operation (Random Bit Generation)

Family Behavior:

This family defines requirements for random bit generation to ensure that it is performed in accordance with selected standards and seeded by an entropy source.

Component leveling:



FCS_RBG_EXT.1 Random Bit Generation requires random bit generation to be performed in accordance with selected standards and seeded by an entropy source.

Management:

The following actions could be considered for the management functions in FMT:

- There are no management actions foreseen.

Audit:

The following actions should be auditable if FAU_GEN Security Audit Data Generation is included in the PP/ST:

- There are no auditable events foreseen.

FCS_RBG_EXT.1 Extended: Cryptographic Operation (Random Bit Generation)

Hierarchical to : No other components.
 Dependencies : No dependencies.

FCS_RBG_EXT.1.1 The TSF shall perform all deterministic random bit generation services in accordance with [selection: ISO/IEC 18031:2011, NIST SP 800-90A] using [selection: Hash_DRBG (any), HMAC_DRBG (any), CTR_DRBG (AES)].

FCS_RBG_EXT.1.2 The deterministic RBG shall be seeded by at least one entropy source that accumulates entropy from [selection: [assignment: number of software-based sources] software-based noise source(s), [assignment: number of hardware-based sources] hardware-based noise source(s)] with a minimum of [selection: 128 bits, 256 bits] of entropy at least equal to the greatest security strength, according to ISO/IEC 18031:2011 Table C.1 "Security Strength Table for Hash Functions", of the keys and hashes that it will generate.

Rationale:

Random bits/number will be used by the SFRs for key generation and destruction, and the Common Criteria does not provide a suitable SFR for the random bit generation.

This extended component ensures the strength of encryption keys, and it is therefore placed in the FCS class with a single component.

5.6. FDP_DSK_EXT Extended: Protection of Data on Disk

Family Behavior:

This family is to mandate the encryption of all protected data written to the storage.

Component leveling:



FDP_DSK_EXT.1 Extended: Protection of Data on Disk, requires the TSF to encrypt all the Confidential TSF and User Data stored on the Field-Replaceable Nonvolatile Storage Devices in order to avoid storing these data in plaintext on the devices.

Management:

The following actions could be considered for the management functions in FMT:

- There are no management actions foreseen.

Audit:

The following actions should be auditable if FAU_GEN Security Audit Data Generation is included in the PP/ST:

- There are no auditable events foreseen.

FDP_DSK_EXT.1 Extended: Protection of Data on Disk

Hierarchical to : No other components

Dependencies : FCS_COP.1(d) Cryptographic operation (AES Data Encryption/Decryption).

FDP_DSK_EXT.1.1 The TSF shall [selection: perform encryption in accordance with FCS_COP.1(d) , use a self-encrypting Field-Replaceable Nonvolatile Storage Device that is separately CC certified to conform to the FDE EE cPP], such that any Field-Replaceable Nonvolatile Storage Device contains no plaintext User Document Data and no plaintext Confidential TSF Data.

FDP_DSK_EXT.1.2 The TSF shall encrypt all protected data without user intervention.

Rationale:

Extended: Protection of Data on Disk is to specify that encryption of any confidential data without user intervention, and the Common Criteria does not provide a suitable SFR for the Protection of Data on Disk.


This extended component protects the Data on Disk, and it is therefore placed in the FDP class with a single component.

5.7. FIA_PMG_EXT Extended: Password Management

Family Behavior:

This family defines requirements for the attributes of passwords used by administrative users to ensure that strong passwords and passphrases can be chosen and maintained.

Component leveling:



FIA_PMG_EXT.1 Password management requires the TSF to support passwords with varying composition requirements, minimum lengths, maximum lifetime, and similarity constraints.

Management:

The following actions could be considered for the management functions in FMT:

- There are no management actions foreseen.

Audit:

The following actions should be auditable if FAU_GEN Security Audit Data Generation is included in the PP/ST:

- There are no auditable events foreseen.

FIA_PMG_EXT.1 Extended: Password Management

Hierarchical to : No other components

Dependencies : No dependencies

FIA_PMG_EXT.1.1

The TSF shall provide the following password management capabilities for User passwords:

- Passwords shall be able to be composed of any combination of upper and lower case letters, numbers, and the following special characters: [selection: "!", "@", "#", "\$", "%", "^", "&", "*", "(", ")", [assignment: other characters]];
 - Minimum password length shall be settable by an Administrator, and have the capability to require passwords of 15 characters or greater;

Rationale:

Password Management is to ensure the strong authentication between the endpoints of communication, and the Common Criteria does not provide a suitable SFR for the Password Management.

This extended component protects the TOE by means of password management, and it is therefore placed in the FIA class with a single component.

5.8. FIA_PSK_EXT Extended: Pre-Shared Key Composition

Family Behavior:

This family defines requirements for the TSF to ensure the ability to use pre-shared keys for IPsec.

Component leveling:



FIA_PSK_EXT.1 Pre-Shared Key Composition, ensures authenticity and access control for updates.

Management:

The following actions could be considered for the management functions in FMT:

- There are no management actions foreseen.

Audit:

The following actions should be auditable if FAU_GEN Security Audit Data Generation is included in the PP/ST:

- There are no auditable events foreseen.

| | |
|----------------------|--|
| FIA_PSK_EXT.1 | Extended: Pre-Shared Key Composition |
| | Hierarchical to : No other components |
| | Dependencies : FCS_RBG_EXT.1 Extended: Cryptographic Operation (Random Bit Generation) |
| FIA_PSK_EXT.1.1 | The TSF shall be able to use pre-shared keys for IPsec. |
| FIA_PSK_EXT.1.2 | The TSF shall be able to accept text-based pre-shared keys that are: - 22 characters in length and [selection: [assignment: other supported lengths], no other lengths]; - Composed of any combination of upper and lower case letters, numbers, and special characters (that include: "!", "@", "#", "\$", "%", "^", "&", "*", "(", and ")"). |
| FIA_PSK_EXT.1.3 | The TSF shall condition the text-based pre-shared keys by using [selection: SHA-1, SHA-256, SHA-512, [assignment: method of conditioning text string]] and be able to [selection: use no other pre-shared keys; accept bit-based pre-shared keys; generate bit-based pre-shared keys using the random bit generator specified in FCS_RBG_EXT.1]. |

Rationale:

Pre-shared Key Composition is to ensure the strong authentication between the endpoints of communications, and the Common Criteria does not provide a suitable SFR for the Pre-shared Key Composition.


This extended component protects the TOE by means of strong authentication, and it is therefore placed in the FIA class with a single component.

5.9. FPT_KYP_EXT Extended: Protection of Key and Key Material

Family Behavior:

This family addresses the requirements for keys and key materials to be protected if and when written to nonvolatile storage.

Component leveling:



FPT_KYP_EXT.1 Extended: Protection of key and key material, requires the TSF to ensure that no plaintext key or key materials are written to nonvolatile storage.

Management:

The following actions could be considered for the management functions in FMT:

- There are no management actions foreseen.

Audit:

The following actions should be auditable if FAU_GEN Security Audit Data Generation is included in the PP/ST:

- There are no auditable events foreseen.

| | |
|----------------------|--|
| FPT_KYP_EXT.1 | Extended: Protection of Key and Key Material |
| | Hierarchical to : No other components. |
| | Dependencies : No dependencies. |
| FPT_KYP_EXT.1.1 | The TSF shall not store plaintext keys that are part of the keychain specified by FCS_KYC_EXT.1 in any Field-Replaceable Nonvolatile Storage Device. |

Rationale:

Protection of Key and Key Material is to ensure that no plaintext key or key material are written to nonvolatile storage, and the Common Criteria does not provide a suitable SFR for the protection of key and key material.


This extended component protects the TSF data, and it is therefore placed in the FPT class with a single component.

5.10. FPT_SKP_EXT Extended: Protection of TSF Data

Family Behavior:

This family addresses the requirements for managing and protecting the TSF data, such as cryptographic keys. This is a new family modelled as the FPT Class.

Component leveling:



FPT_SKP_EXT.1 Protection of TSF Data (for reading all symmetric keys), requires preventing symmetric keys from being read by any user or subject. It is the only component of this family.

Management:

The following actions could be considered for the management functions in FMT:

- There are no management actions foreseen.

Audit:

The following actions should be auditable if FAU_GEN Security Audit Data Generation is included in the PP/ST:

- There are no auditable events foreseen.

| | |
|----------------------|---|
| FPT_SKP_EXT.1 | Extended: Protection of TSF Data |
| | Hierarchical to : No other components. |
| | Dependencies : No dependencies. |
| FPT_SKP_EXT.1.1 | The TSF shall prevent reading of all pre-shared keys, symmetric keys, and private keys. |

Rationale:

Protection of TSF Data is to ensure the pre-shared keys, symmetric keys and private keys are protected securely, and the Common Criteria does not provide a suitable SFR for the protection of such TSF data.

This extended component protects the TOE by means of strong authentication using Preshared Key, and it is therefore placed in the FPT class with a single component.

5.11. FPT_TST_EXT Extended: TSF testing

Family Behavior:

This family addresses the requirements for self-testing the TSF for selected correct operation.

Component leveling:



FPT_TST_EXT.1 TSF testing requires a suite of self-testing to be run during initial start-up in order to demonstrate correct operation of the TSF.

Management:

The following actions could be considered for the management functions in FMT:

- There are no management actions foreseen.

Audit:

The following actions should be auditable if FAU_GEN Security Audit Data Generation is included in the PP/ST:

- There are no auditable events foreseen.

| | |
|----------------------|---|
| FPT_TST_EXT.1 | Extended: TSF testing |
| | Hierarchical to : No other components |
| | Dependencies : No dependencies |
| FPT_TST_EXT.1.1 | The TSF shall run a suite of self-tests during initial start-up (and power on) to demonstrate the correct operation of the TSF. |

Rationale:

TSF testing is to ensure the TSF can be operated correctly, and the Common Criteria does not provide a suitable SFR for the TSF testing. In particular, there is no SFR defined for TSF testing.


This extended component protects the TOE, and it is therefore placed in the FPT class with a single component.

5.12. FPT_TUD_EXT Extended: Trusted Update

Family Behavior:

This family defines requirements for the TSF to ensure that only administrators can update the TOE firmware/software, and that such firmware/software is authentic.

Component leveling:



FPT_TUD_EXT.1 Trusted Update, ensures authenticity and access control for updates.

Management:

The following actions could be considered for the management functions in FMT:

- There are no management actions foreseen.

Audit:

The following actions should be auditable if FAU_GEN Security Audit Data Generation is included in the PP/ST:

- There are no auditable events foreseen.

FPT_TUD_EXT.1 Extended: Trusted Update

Hierarchical to : No other components
 Dependencies : FCS_COP.1(b) Cryptographic Operation (for signature generation/verification),
 FCS_COP.1(c) Cryptographic operation (Hash Algorithm).

- FPT_TUD_EXT.1.1 The TSF shall provide authorized administrators the ability to query the current version of the TOE firmware/software.
- FPT_TUD_EXT.1.2 The TSF shall provide authorized administrators the ability to initiate updates to TOE firmware/software.
- FPT_TUD_EXT.1.3 The TSF shall provide a means to verify firmware/software updates to the TOE using a digital signature mechanism and [selection: published hash, no other functions] prior to installing those updates.

Rationale:

Firmware/software is a form of TSF Data, and the Common Criteria does not provide a suitable SFR for the management of firmware/software. In particular, there is no SFR defined for importing TSF Data.

This extended component protects the TOE, and it is therefore placed in the FPT class with a single component.

6. Security Requirements

This chapter describes the security requirements.

6.1. Security functional requirements

This section describes the security function requirements of TOE to implement the security policy specified in Section 4.1. The security function requirements are quoted from the security function requirements specified in CC Part 2. For security functional requirements not specified in CC Part 2, see Section 5.

<How to specify security function requirements "operation">

Decorations are made based on the following rules in the description of the Functional Elements below.

- **The notation given in bold indicates** the part of the SFR that has been completed or elaborated in the PP and relates to the original SFR or Extended Component definition in Common Criteria Part 2.
- *Italic fonts* indicate the text in the SFR selected or assigned in this ST. The selected or assigned values are shown in [blue](#).
- **Balldeutatic font** indicates the text in the SFR selected and/or completed in ST for the portion of the SFR that is completed or detailed in PP. The selected or assigned values are shown in [blue](#).
- **The underscore** shows the results of this ST detail (in the case of tables, only the title is specified).
- SFR components in parentheses followed by characters, e.g., (a), (b),..., indicate repeats.
- Extended components are identified by adding "_EXT" to the SFR identification.

Mandatory SFR

6.1.1. Class FAU: Security audit

| | |
|-------------|--|
| FAU_GEN.1 | <p>Audit data generation</p> <p>(for O.AUDIT)</p> <p>Hierarchical to : No other components</p> <p>Dependencies : FPT_STM.1 Reliable time stamps</p> |
| FAU_GEN.1.1 | <p>The TSF shall be able to generate an audit record of the following auditable events:</p> <p>a) Start-up and shutdown of the audit functions;</p> <p>b) All auditable events for the not specified level of audit; and</p> <p>c) All auditable events specified in Table 6-1, [assignment: <i>other specifically defined auditable events</i>].</p> <p>[assignment: other specifically defined auditable events]</p> <ul style="list-style-type: none"> ▪ None |
| FAU_GEN.1.2 | <p>The TSF shall record within each audit record at least the following information:</p> <p>a) Date and time of the event, type of event, subject identity (if applicable), and the outcome (success or failure) of the event; and</p> <p>b) For each audit event type, based on the auditable event definitions of the functional components included in the PP/ST, additional information specified in Table 6-1, [assignment: <i>other audit relevant information</i>].</p> <p>[assignment: other audit relevant information]</p> <ul style="list-style-type: none"> ▪ None |

Table 6-1 Audit data requirements

| Auditable event | Relevant SFR | Additional | Details |
|-----------------|--------------|------------|---------|
|-----------------|--------------|------------|---------|

| | | Information | |
|--|---|--------------------|--|
| Job completion | FDP_ACF.1 | Type of job | - Completion of copying - Completion of scanning - Saving a copy job - Reading stored jobs - Printing stored jobs - Deleting stored jobs - Modify/Restore (move/duplicate) stored jobs - Printing a print job - Saving a print job |
| Unsuccessful User authentication | FIA_UAU.1 | None | Successful login Login failures |
| Unsuccessful User identification | FIA_UID.1 | None | Successful login Login failures |
| Use of management functions | FMT_SMF.1 | None | - Using Security Management Functions |
| Modification to the group of Users that are part of a role | FMT_SMR.1 | None | Do not record because user role change function does not exist. |
| Changes to the time | FPT_STM.1 | None | - Change in the time |
| Failure to establish session | FTP_ITC.1, FTP_TRP.1(a), FTP_TRP.1(b) | Reason for failure | - Reasons for Failure to Establish Communication |

FAU_GEN.2 User identity association

(for O.AUDIT)

Hierarchical to : No other components

Dependencies : FAU_GEN.1 Audit data generation

FIA_UID.1 Timing of identification

FAU_GEN.2.1 For audit events resulting from actions of identified users, the TSF shall be able to associate each auditable event with the identity of the user that caused the event.

FAU_STG_EXT.1 Extended: External Audit Trail Storage

(for O.AUDIT)

Hierarchical to : No other components

Dependencies : FAU_GEN.1 Audit data generation,

FTP_ITC.1 Inter-TSF trusted channel

FAU_STG_EXT.1.1 The TSF shall be able to transmit the generated audit data to an External IT Entity using a trusted channel according to FTP_ITC.1.

6.1.2. Class FCS: Cryptographic support

FCS_CKM.1(a) Cryptographic Key Generation (for asymmetric keys)

(for O.COMMS_PROTECTION)

Hierarchical to : No other components.

Dependencies : [FCS_CKM.2 Cryptographic key distribution, or
 FCS_COP.1(b) Cryptographic Operation (for signature generation/
 verification),
 FCS_COP.1(i) Cryptographic operation (Key Transport)]
 FCS_CKM_EXT.4 Extended: Cryptographic Key Material Destruction

FCS_CKM.1.1(a) The TSF shall generate **asymmetric** cryptographic keys **used for key establishment** in accordance with
 Refinement: **[selection:**

- *NIST Special Publication 800-56A, “Recommendation for Pair-Wise Key Establishment Schemes Using Discrete Logarithm Cryptography” for finite field-based key establishment schemes;*
- *NIST Special Publication 800-56A, “Recommendation for Pair-Wise Key Establishment Schemes Using Discrete Logarithm Cryptography” for elliptic curve-based key establishment schemes and implementing “NIST curves” P-256, P-384 and [selection: P-521, no other curves] (as defined in FIPS PUB 186-4, “Digital Signature Standard”)*
- *NIST Special Publication 800-56B, “Recommendation for Pair-Wise Key Establishment Schemes Using Integer Factorization Cryptography” for RSA-based key establishment schemes*

] and specified cryptographic key sizes equivalent to, or greater than, a symmetric key strength of 112 bits.

[selection: NIST Special ...]

- NIST Special Publication 800-56A, “Recommendation for Pair-Wise Key Establishment Schemes Using Discrete Logarithm Cryptography” for finite field-based key establishment schemes
- NIST Special Publication 800-56B, “Recommendation for Pair-Wise Key Establishment Schemes Using Integer Factorization Cryptography” for RSA-based key establishment schemes

FCS_CKM.1(b)

Cryptographic key generation (Symmetric Keys)

(for O.COMMS_PROTECTION, O.STORAGE_ENCRYPTION)

Hierarchical to : No other components.

Dependencies : [FCS_CKM.2 Cryptographic key distribution, or
 FCS_COP.1(a) Cryptographic Operation (Symmetric
 Encryption/decryption)
 FCS_COP.1(d) Cryptographic Operation (AES Data
 Encryption/Decryption)
 FCS_COP.1(e) Cryptographic Operation (Key Wrapping)
 FCS_COP.1(f) Cryptographic operation (Key Encryption)
 FCS_COP.1(g) Cryptographic Operation (for keyed-hash message
 authentication)
 FCS_COP.1(h) Cryptographic Operation (for keyed-hash message
 authentication)]
 FCS_CKM_EXT.4 Extended: Cryptographic Key Material Destruction
 FCS_RBG_EXT.1 Extended: Cryptographic Operation (Random Bit
 Generation)

FCS_CKM.1.1(b) The TSF shall generate **symmetric** cryptographic keys **using a Random Bit Generator as specified in**
 Refinement: **FCS_RBG_EXT.1 and specified cryptographic key sizes [selection: 128 bit, 256 bit] that meet the**
following: No Standard.

[selection: 128 bit, 256 bit]

- 128bit
- 256 bit

FCS_CKM_EXT.4 Extended: Cryptographic Key Material Destruction

(for O.COMMS_PROTECTION, O.STORAGE_ENCRYPTION, O.PURGE_DATA)

Hierarchical to : No other components.

Dependencies : [FCS_CKM.1(a) Cryptographic Key Generation (for asymmetric keys), or
FCS_CKM.1(b) Cryptographic key generation (Symmetric Keys)],
FCS_CKM.4 Cryptographic key destructionFCS_CKM_EXT.4.1 The TSF shall destroy **all plaintext secret and private cryptographic keys and cryptographic critical security parameters** when no longer needed.**FCS_CKM.4 Cryptographic key destruction**

(for O.COMMS_PROTECTION, O.STORAGE_ENCRYPTION, O.PURGE_DATA)

Hierarchical to : No other components.

Dependencies : [FCS_CKM.1(a) Cryptographic Key Generation (for asymmetric keys), or
FCS_CKM.1(b) Cryptographic key generation (Symmetric Keys)]FCS_CKM.4.1 The TSF shall destroy cryptographic keys in accordance with a specified cryptographic key **destruction**
Refinement: method [selection:

- **For volatile memory, the destruction shall be executed by [selection: *powering off a device*, [assignment: *other mechanism that ensures keys are destroyed*]].**
- **For nonvolatile storage, the destruction shall be executed by a [selection: *single, three or more times*] overwrite of key data storage location consisting of [selection: *a pseudo random pattern using the TSF's RBG (as specified in FCS_RBG_EXT.1), a static pattern*], followed by a [selection: *read-verify, none*]. If read-verification of the overwritten data fails, the process shall be repeated again;**

] that meets the following: [selection: *NIST SP800-88, no standard*].[selection: *For volatile memory, ...*]

- For volatile memory, the destruction shall be executed by [selection: *powering off a device*, [assignment: *other mechanism that ensures keys are destroyed*]].
- For nonvolatile storage, the destruction shall be executed by a [selection: *single, three or more times*] overwrite of key data storage location consisting of [selection: *a pseudo random pattern using the TSF's RBG (as specified in FCS_RBG_EXT.1), a static pattern*], followed by a [selection: *read-verify, none*]. If read-verification of the overwritten data fails, the process shall be repeated again;

[selection: *powering off a device*, [assignment: *other mechanism that ensures keys are destroyed*]]

- *powering off a device*

[selection: *single, three or more times*]

- *single*

[selection: *a pseudo random pattern using the TSF's RBG (as specified in FCS_RBG_EXT.1), a static pattern*]

- *a static pattern*

[selection: *read-verify, none*]

- *none*

[selection: *NIST SP800-88, no standard*]

- *no standard*

FCS_COP.1(a) Cryptographic Operation (Symmetric encryption/decryption)

(for O.COMMS_PROTECTION)

Hierarchical to : No other components

Dependencies : [FDP_ITC.1 Import of user data without security attributes, or
~~FDP_ITC.2 Import of user data with security attributes, or~~
 FCS_CKM.1(b) Cryptographic key generation (Symmetric Keys)]
 FCS_CKM_EXT.4 Extended: Cryptographic Key Material Destruction

FCS_COP.1.1(a)
Refinement

The TSF shall perform **encryption and decryption** in accordance with a specified cryptographic algorithm **AES operating in [assignment: one or more modes]** and cryptographic key sizes **128-bits and 256-bits** that meets the following:

- **FIPS PUB 197, “Advanced Encryption Standard (AES)”**
- **[Selection: NIST SP 800-38A, NIST SP 800-38B, NIST SP 800-38C, NIST SP 800-38D]**

[assignment: one or more modes]

- CBC

[Selection: NIST SP 800-38A, NIST SP 800-38B, NIST SP 800-38C, NIST SP 800-38D]

- NIST SP800-38A

FCS_COP.1(b)

Cryptographic Operation (for signature generation/verification)

(for O.UPDATE_VERIFICATION, O.COMMS_PROTECTION)

Hierarchical to : No other components

Dependencies : [FDP_ITC.1 Import of user data without security attributes, or
~~FDP_ITC.2 Import of user data with security attributes, or~~
 FCS_CKM.1(a) Cryptographic Key Generation (for asymmetric Keys)]
 FCS_CKM_EXT.4 Extended: Cryptographic Key Material Destruction

FCS_COP.1.1(b)
Refinement

The TSF shall perform **cryptographic signature services** in accordance with a **[selection:**

- **Digital Signature Algorithm (DSA) with key sizes (modulus) of [assignment: 2048 bits or greater],**
- **RSA Digital Signature Algorithm (rDSA) with key sizes (modulus) of [assignment: 2048 bits or greater], or**
- **Elliptic Curve Digital Signature Algorithm (ECDSA) with key sizes of [assignment: 256 bits or greater]]**

that meets the following **[selection:**

Case: Digital Signature Algorithm

- FIPS PUB 186-4, “Digital Signature Standard”

Case: RSA Digital Signature Algorithm

- FIPS PUB 186-4, “Digital Signature Standard”

Case: Elliptic Curve Digital Signature Algorithm

- FIPS PUB 186-4, “Digital Signature Standard”
- The TSF shall implement “NIST curves” P-256, P384 and [selection: P521, no other curves] (as defined in FIPS PUB 186-4, “Digital Signature Standard”).

]

[selection: Digital Signature ...]

- RSA Digital Signature Algorithm (rDSA) with key sizes (modulus) of [assignment: 2048 bits or greater]

[assignment: 2048 bits or greater]

- 2048bits

[selection: Case: Digital ...]

- FIPS PUB 186-4, “Digital Signature Standard”

FCS_RBG_EXT.1 Extended: Cryptographic Operation (Random Bit Generation)

(for O.STORAGE_ENCRYPTION and O.COMMS_PROTECTION)

Hierarchical to : No other components.

Dependencies : No dependencies.

FCS_RBG_EXT.1.1 The TSF shall perform all deterministic random bit generation services in accordance with [selection: *ISO/IEC 18031:2011, NIST SP 800-90A*] using [selection: *Hash_DRBG (any), HMAC_DRBG (any), CTR_DRBG (AES)*].

[selection: *ISO/IEC 18031:2011, NIST SP 800-90A*]

- NIST SP 800-90A

[selection: *Hash_DRBG (any), HMAC_DRBG (any), CTR_DRBG (AES)*]

- CTR_DRBG (AES)

FCS_RBG_EXT.1.2 The deterministic RBG shall be seeded by at least one entropy source that accumulates entropy from [selection: [assignment: *number of software-based sources*] software-based noise source(s), [assignment: *number of hardware-based sources*] hardware-based noise source(s)] with a minimum of [selection: *128 bits, 256 bits*] of entropy at least equal to the greatest security strength, according to ISO/IEC 18031:2011 Table C.1 “Security Strength Table for Hash Functions”, of the keys and hashes that it will generate.

[selection: [assignment: *number of software-based sources*] software-based noise source(s), [assignment: *number of hardware-based sources*] hardware-based noise source(s)]

- [assignment: *number of hardware-based sources*] hardware-based noise source(s)

[assignment: *number of hardware-based sources*]

- one

[selection: *128 bits, 256 bits*]

- 256 bits

6.1.3. Class FDP: User data protection

FDP_ACC.1 Subset access control

(for O.ACCESS_CONTROL and O.USER_AUTHORIZATION)

Hierarchical to : No other components

Dependencies : FDP_ACF.1 Security attribute based access control

FDP_ACC.1.1 The TSF shall enforce the **User Data Access Control SFP** on subjects, objects, and operations among subjects and objects specified in **Table 6-2 and Table 6-3**.

Refinement

FDP_ACF.1 Security attribute based access control

(for O.ACCESS_CONTROL and O.USER_AUTHORIZATION)

Hierarchical to : No other components

Dependencies : FDP_ACC.1 Subset access control

FMT_MSA.3 Static attribute initialisation

FDP_ACF.1.1 The TSF shall enforce the **User Data Access Control SFP** to objects based on the following: subjects, objects, and attributes specified in **Table 6-2 and Table 6-3**.

Refinement

FDP_ACF.1.2 The TSF shall enforce the following rules to determine if an operation among controlled subjects and controlled objects is allowed: **rules governing access among controlled subjects and controlled objects using controlled operations on controlled objects specified in Table 6-2 and Table 6-3**.

Refinement

FDP_ACF.1.3 Refinement The TSF shall explicitly authorise access of subjects to objects based on the following additional rules:
 [assignment: *rules that do not conflict with the User Data Access Control SFP, based on security attributes, that explicitly authorise access of subjects to objects*].

[assignment: *rules that do not conflict with the User Data Access Control SFP, based on security attributes, that explicitly authorise access of subjects to objects*]

- None

FDP_ACF.1.4 Refinement The TSF shall explicitly deny access of subjects to objects based on the following additional rules:
 [assignment: *rules that do not conflict with the User Data Access Control SFP, based on security attributes, that explicitly deny access of subjects to objects*].

[assignment: *rules that do not conflict with the User Data Access Control SFP, based on security attributes, that explicitly deny access of subjects to objects*]

- None

Table 6-2 D.USER.DOC Access Control SFP

| | | "Create" | "Read" | "Modify" | "Delete" |
|---------------------|--------------------|--|--|-------------------------------|-------------------------------|
| Print | Operation : | <i>Submit a document to be printed</i> | <i>View image or Release printed output</i> | <i>Modify stored document</i> | <i>Delete stored document</i> |
| | Job owner | (note 1) | | | |
| | U.ADMIN | denied | denied | denied | |
| | U.NORMAL | | denied | denied | denied |
| | Unauthenticated | denied | denied | denied | denied |
| Scan | Operation : | <i>Submit a document for scanning</i> | <i>View scanned image</i> | <i>Modify stored image</i> | <i>Delete stored image</i> |
| | Job owner | (note 2) | denied | denied | denied |
| | U.ADMIN | denied | denied | denied | denied |
| | U.NORMAL | | denied | denied | denied |
| | Unauthenticated | denied | denied | denied | denied |
| Copy | Operation : | <i>Submit a document for copying</i> | <i>View scanned image or Release printed copy output</i> | <i>Modify stored image</i> | <i>Delete stored image</i> |
| | Job owner | (note 2) | denied | denied | |
| | U.ADMIN | denied | denied | denied | denied |
| | U.NORMAL | | denied | denied | denied |
| | Unauthenticated | denied | denied | denied | denied |
| Storage / retrieval | Operation : | <i>Store document</i> | <i>Retrieve stored document</i> | <i>Modify stored document</i> | <i>Delete stored document</i> |
| | Job owner | (note 1) | | | |
| | U.ADMIN | denied | | denied | |
| | U.NORMAL | | denied | denied | denied |
| | Unauthenticated | denied | denied | denied | denied |

[Supplement] Table 6-2 describes the SFP in the following situations.

- **Print :** SFP for image data of a job printed with security using the print function
- **Scan :** SFP for image data of a job output to a scan destination using the scan function
- **Copy :** SFP for image data of jobs printed using the copy function
- **Storage / retrieval :**

SFP for image data of jobs stored on Temporary Storage / HDD Storage using copy, scan, and storage functions

*Since this TOE does not incorporate the fax function, there is no operation and access control when "Fax send" or "Fax receive" is used.

Table 6-3 D.USER.JOB Access Control SFP

| | | "Create" | "Read" | "Modify" | "Delete" |
|---------------------|--------------------|---------------------------------------|-------------------------------------|---------------------------------------|---------------------------------------|
| Print | Operation : | <i>Create print job</i> | <i>View print queue / log</i> | <i>Modify print job</i> | <i>Cancel print job</i> |
| | Job owner | (note 1) | | | |
| | U.ADMIN | denied | | denied | |
| | U.NORMAL | | | denied | denied |
| | Unauthenticated | denied | | denied | denied |
| Scan | Operation : | <i>Create scan job</i> | <i>View scan status / log</i> | <i>Modify scan job</i> | <i>Cancel scan job</i> |
| | Job owner | (note 2) | | denied | denied |
| | U.ADMIN | denied | | denied | denied |
| | U.NORMAL | | | denied | denied |
| | Unauthenticated | denied | | denied | denied |
| Copy | Operation : | <i>Create copy job</i> | <i>View copy status / log</i> | <i>Modify copy job</i> | <i>Cancel copy job</i> |
| | Job owner | (note 2) | | denied | |
| | U.ADMIN | denied | | denied | denied |
| | U.NORMAL | | | denied | denied |
| | Unauthenticated | denied | | denied | denied |
| Storage / retrieval | Operation : | <i>Create storage / retrieval job</i> | <i>View storage / retrieval log</i> | <i>Modify storage / retrieval job</i> | <i>Cancel storage / retrieval job</i> |
| | Job owner | (note 1) | | | |
| | U.ADMIN | denied | | denied | |
| | U.NORMAL | | | denied | denied |
| | Unauthenticated | denied | | denied | denied |

[Supplement] Table 6-3 describes the SFP in the following situations.

- **Print :** SFP for job data of a job printed with security using the print function
- **Scan :** SFP for job data of jobs output to scan destinations using the scan function
- **Copy :** SFP for job data of jobs printed using the copy function
- **Storage / retrieval :**

SFP for job data of jobs stored on Temporary Storage / HDD Storage using copy, scan, and storage functions

*Since this TOE does not incorporate the fax function, there is no operation and access control when "Fax send" or "Fax receive" is used.

Note 1: Job Owner is identified by a credential or assigned to an authorized User as part of the process of submitting a print or storage Job.

Note 2: Job Owner is assigned to an authorized User as part of the process of initiating a scan, copy or retrieval Job.

6.1.4. Class FIA: Identification and authentication

- FIA_AFL.1 Authentication failure handling**
 (for O.USER_I&A)
 Hierarchical to : No other components
 Dependencies : FIA_UAU.1 Timing of authentication
- FIA_AFL.1.1 The TSF shall detect when [selection: [assignment: *positive integer number*], an administrator configurable positive integer within [assignment: *range of acceptable values*]] unsuccessful authentication attempts occur related to [assignment: *list of authentication events*].
 [selection: [assignment: *positive integer number*], an administrator configurable positive integer within [assignment: *range of acceptable values*]]
 [assignment: *positive integer number*],

 - Refer to Table 6-4

[assignment: *list of authentication events*]

 - Refer to Table 6-4
- FIA_AFL.1.2 When the defined number of unsuccessful authentication attempts has been [selection: *met, surpassed*], the TSF shall [assignment: *list of actions*].
 [selection: *met, surpassed*]

 - *met*

[assignment: *list of actions*]

 - Refer to Table 6-4

Table 6-4 Authentication failure handling

| <i>Authentication events</i> | <i>positive integer number</i> | <i>list of actions</i> |
|--|--------------------------------|--|
| User and Administrator Authentication at the Operation Panel | 1 | Authentication suspended for 5 seconds |
| Administrator authentication in Web Connection | 1 | Authentication suspended for 5 seconds |
| User authentication when receiving electronic documents output by the printer driver | 3 | Account Locked |

- FIA_ATD.1 User attribute definition**
 (for O.USER_AUTHORIZATION)
 Hierarchical to : No other components
 Dependencies : No dependencies
- FIA_ATD.1.1 The TSF shall maintain the following list of security attributes belonging to individual users: [assignment: *list of security attributes*].
 [assignment: *list of security attributes*].

 - Task attribute (User ID, Admin ID)
 - Role (U.NORMAL, U.ADMIN)

- FIA_PMG_EXT.1 Extended: Password Management**
 (for O.USER_I&A)

| | |
|---------------------------|---|
| FIA_UID.1.1 Refinement | <p>The TSF shall allow [assignment: <i>list of TSF-mediated actions that do not conflict with the User Data Access Control SFP, and do not provide access to D.TSF.CONF, and do not change any TSF data</i>] on behalf of the user to be performed before the user is identified.</p> <p>[assignment: <i>list of TSF-mediated actions that do not conflict with the User Data Access Control SFP, and do not provide access to D.TSF.CONF, and do not change any TSF data</i>]</p> <ul style="list-style-type: none"> ▪ Confirmation of TOE status and display settings ▪ Viewing the transmission history of scan data by scan operation, output history by copy operation, output history by printer driver, unoutput history that is the history of the job whose output was canceled, and output reservation for a job whose output was not completed ▪ Set the auto-reset time. |
| FIA_UID.1.2 | <p>The TSF shall require each user to be successfully identified before allowing any other TSF-mediated actions on behalf of that user.</p> |
| FIA_USB.1 | <p>User-subject binding</p> <p>(for O.USER_I&A)</p> <p>Hierarchical to : No other components</p> <p>Dependencies : FIA_ATD.1 User attribute definition</p> |
| FIA_USB.1.1 | <p>The TSF shall associate the following user security attributes with subjects acting on the behalf of that user: [assignment: <i>list of user security attributes</i>].</p> <p>[assignment: <i>list of user security attributes</i>].</p> <ul style="list-style-type: none"> ▪ Task attribute (User ID, Admin ID) ▪ Role (U.NORMAL, U.ADMIN) |
| FIA_USB.1.2 | <p>The TSF shall enforce the following rules on the initial association of user security attributes with the subjects acting on behalf of users: [assignment: <i>rules for the initial association of attributes</i>].</p> <p>[assignment: <i>rules for the initial association of attributes</i>]</p> <ul style="list-style-type: none"> ▪ Associates with role U.ADMIN when authenticated with Admin ID (only one fixed) ▪ When authenticated by another ID, the role U.NORMAL is associated. |
| FIA_USB.1.3 | <p>The TSF shall enforce the following rules governing changes to the user security attributes with the subjects acting on behalf of users: [assignment: <i>rules for the changing of attributes</i>].</p> <p>[assignment: <i>rules for the changing of attributes</i>]</p> <ul style="list-style-type: none"> ▪ None |

6.1.5. Class FMT: Security management

| | |
|---------------------------|---|
| FMT_MOF.1 | <p>Management of security functions behaviour</p> <p>(for O.ADMIN_ROLES)</p> <p>Hierarchical to : No other components</p> <p>Dependencies : FMT_SMR.1 Security roles FMT_SMF.1 Specification of Management Functions</p> |
| FMT_MOF.1.1 Refinement | <p>The TSF shall restrict the ability to [selection: <i>determine the behaviour of, disable, enable, modify the behaviour of</i>] the functions [assignment: <i>list of functions</i>] to U.ADMIN.</p> <p>[selection: <i>determine the behaviour of, disable, enable, modify the behaviour of</i>]</p> <ul style="list-style-type: none"> ▪ Refer to Table 6-5 <p>[assignment: <i>list of functions</i>]</p> <ul style="list-style-type: none"> ▪ Refer to Table 6-5 |

Table 6-5 Management of Security Functions behavior

| Security Functions | Operations |
|---|-----------------|
| Security enhancement setting function | Disable, enable |
| Service login permission setting function | Disable, enable |

FMT_MSA.1

Management of security attributes

(for O.ACCESS_CONTROL and O.USER_AUTHORIZATION)

- Hierarchical to : No other components
- Dependencies : [FDP_ACC.1 Subset access control, or
~~FDP_IFC.1 Subset information flow control~~
FMT_SMR.1 Security roles
FMT_SMF.1 Specification of Management Functions

FMT_MSA.1.1 Refinement The TSF shall enforce the **User Data Access Control SFP** to restrict the ability to [selection: *change_default, query, modify, delete, [assignment: other operations]*] the security attributes [assignment: *list of security attributes*] to [assignment: *the authorised identified roles*].
[selection: *change_default, query, modify, delete, [assignment: other operations]*]

- Refer to Table 6-6

[assignment: *list of security attributes*]

- Refer to Table 6-6

[assignment: *the authorized identified roles*]

- Refer to Table 6-6

Table 6-6 Management of Object Security Attribute

| Security Attribute | Authorized Identified Roles | Operations |
|--------------------|-----------------------------|-----------------------------|
| User ID | U.ADMIN | To register, modify, delete |

FMT_MSA.3

Static attribute initialisation

(for O.ACCESS_CONTROL and O.USER_AUTHORIZATION)

- Hierarchical to : No other components
- Dependencies : FMT_MSA.1 Management of security attributes
FMT_SMR.1 Security roles

FMT_MSA.3.1 Refinement The TSF shall enforce the **User Data Access Control SFP** to provide [selection, choose one of: *restrictive, permissive, [assignment: other property]*] default values for security attributes that are used to enforce the SFP.
[selection, choose one of: *restrictive, permissive, [assignment: other property]*]

- restrictive

FMT_MSA.3.2 Refinement The TSF shall allow the [selection: *U.ADMIN, no role*] to specify alternative initial values to override the default values when an object or information is created.
[selection: *U.ADMIN, no role*]

- no role

FMT_MTD.1

Management of TSF data

(for O.ACCESS_CONTROL)

- Hierarchical to : No other components

Dependencies : FMT_SMR.1 Security roles
 FMT_SMF.1 Specification of Management Functions

FMT_MTD.1.1 The TSF shall restrict the ability to **perform the specified operations on the specified TSF Data to the roles specified in Table 6-7, Table 6-8 and Table 6-9.**

Refinement

Table 6-7 Operation of TSF Data (1)

TSF Data owned by a U.NORMAL or associated with Documents or jobs owned by a U.NORMAL

| TSF Data | Operations | Authorized Roles |
|-----------------------------|-------------------------------|----------------------|
| Login password for U.NORMAL | Modify | The owning U.NORMAL. |
| Login password for U.NORMAL | Registration and modification | U.ADMIN, |

Table 6-8 Operation of TSF Data (2)

TSF Data not owned by a U.NORMAL

| TSF Data | Operations | Authorized Roles |
|-------------------------------------|---------------|------------------|
| Date and time information | Modify | U.ADMIN |
| Encryption key (KEK) | Modify | U.ADMIN |
| Encryption key (KEK/DEK) | delete | U.ADMIN |
| Audit Log Destination | modify | U.ADMIN |
| Network Settings | modify | U.ADMIN |
| Password rule | Query, modify | U.ADMIN |
| Administrator password for U. ADMIN | Modify | U.ADMIN |

Table 6-9 Operation of TSF Data (3)

TSF Data: software, firmware, and related configuration data

| TSF Data | Operations | Authorized Roles |
|---|------------|------------------|
| TOE firmware update data (firmware to be updated) | Modify | U.ADMIN |

FMT_SMF.1 Specification of Management Functions

(for O.USER_AUTHORIZATION, O.ACCESS_CONTROL, and O.ADMIN_ROLES)

Hierarchical to : No other components

Dependencies : No dependencies

FMT_SMF.1.1 The TSF shall be capable of performing the following management functions: [assignment: *list of management functions provided by the TSF*].

Refinement

[assignment: *list of management functions provided by the TSF*]

- refer to Table 6-10

Table 6-10 list of management functions

| Management functions |
|--|
| Security enhancement setting function by U.ADMIN |
| Audit log destination setting function by U.ADMIN |
| User management function by U.ADMIN*. |
| Change own login password function by U.NORMAL |
| Change administrator password function by U.ADMIN |
| Change date and time information function by U.ADMIN |
| Change password rules function by U.ADMIN |

Registration and change of network settings function by U.ADMIN

Change encryption key function by U.ADMIN

Update firmware function by U.ADMIN

All data overwrite and delete function by U.ADMIN

Service login permission setting function by U.ADMIN

* User management functions include U.NORMAL login password management by U.ADMIN and subject security attribute management.

FMT_SMR.1

Security roles

(for O.ACCESS_CONTROL, O.USER_AUTHORIZATION, and O.ADMIN_ROLES)

Hierarchical to : No other components

Dependencies : FIA_UID.1 Timing of identification

FMT_SMR.1.1

The TSF shall maintain the roles **U.ADMIN**, **U.NORMAL**.

Refinement

FMT_SMR.1.2

The TSF shall be able to associate users with roles.

6.1.6. Class FPT: Protection of the TSF

FPT_SKP_EXT.1

Extended: Protection of TSF Data

(for O.COMMS_PROTECTION)

Hierarchical to : No other components.

Dependencies : No dependencies.

FPT_SKP_EXT.1.1

The TSF shall prevent reading of all pre-shared keys, symmetric keys, and private keys.

FPT_STM.1

Reliable time stamps

(for O.AUDIT)

Hierarchical to : No other components

Dependencies : No dependencies

FPT_STM.1.1

TSF shall be able to provide reliable time stamps.

FPT_TST_EXT.1

Extended: TSF testing

(for O.TSF_SELF_TEST)

Hierarchical to : No other components

Dependencies : No dependencies

FPT_TST_EXT.1.1

The TSF shall run a suite of self-tests during initial start-up (and power on) to demonstrate the correct operation of the TSF.

FPT_TUD_EXT.1

Extended: Trusted Update

(for O.UPDATE_VERIFICATION)

Hierarchical to : No other components

Dependencies : FCS_COP.1(b) Cryptographic Operation (for signature generation/verification)

FCS_COP.1(c) Cryptographic operation (Hash Algorithm).

FPT_TUD_EXT.1.1

The TSF shall provide authorized administrators the ability to query the current version of the TOE

| | |
|-----------------|--|
| | firmware/software. |
| FPT_TUD_EXT.1.2 | The TSF shall provide authorized administrators the ability to initiate updates to TOE firmware/software. |
| FPT_TUD_EXT.1.3 | The TSF shall provide a means to verify firmware/software updates to the TOE using a digital signature mechanism and [selection: <i>published hash, no other functions</i>] prior to installing those updates. [selection: <i>published hash, no other functions</i>] <ul style="list-style-type: none"> ▪ no other functions |

6.1.7. Class FTA: TOE access

| | |
|------------------|---|
| FTA_SSL.3 | TSF-initiated termination (for O.USER_I&A) Hierarchical to : No other components Dependencies : No dependencies |
| FTA_SSL.3.1 | The TSF shall terminate an interactive session after a [assignment: <i>time interval of user inactivity</i>]. [assignment: <i>time interval of user inactivity</i>] <ul style="list-style-type: none"> ▪ In the case of the operation panel, <ul style="list-style-type: none"> ➤ For general users, any user settable time from 1 to 9 minutes after the last operation and the processing by the last operation is completed.. ➤ For administrators, 30 minutes from the completion of processing by the last operation. ▪ For Web Connection, there is no interactive session ▪ For printer drivers, there is no interactive session |

6.1.8. Class FTP: Trusted path/channels

| | |
|---------------------------|--|
| FTP_ITC.1 | Inter-TSF trusted channel (for O.COMMS_PROTECTION, O.AUDIT) Hierarchical to : No other components Dependencies : [FCS_IPSEC_EXT.1 Extended: IPsec selected, or FCS_TLS_EXT.1 Extended: TLS selected, or FCS_SSH_EXT.1 Extended: SSH selected, or FCS_HTTPS_EXT.1 Extended: HTTPS selected]. |
| FTP_ITC.1.1 Refinement | The TSF shall use [selection: <i>IPsec, SSH, TLS, TLS/HTTPS</i>] to provide a trusted communication channel between itself and authorized IT entities supporting the following capabilities: [selection: <i>authentication server, [assignment: other capabilities]</i>] that is logically distinct from other communication channels and provides assured identification of its end points and protection of the channel data from disclosure and detection of modification of the channel data . [selection: <i>IPsec, SSH, TLS, TLS/HTTPS</i>] <ul style="list-style-type: none"> ▪ IPsec [selection: <i>authentication server, [assignment: other capabilities]</i>] <ul style="list-style-type: none"> ▪ [assignment: other capabilities] [assignment: <i>other capabilities</i>] <ul style="list-style-type: none"> ▪ File server (WebDAV, FTP, SMB) ▪ Audit log server (syslog) |
| FTP_ITC.1.2 | The TSF shall permit the TSF, or the authorized IT entities , to initiate communication via the trusted |

| | |
|-------------|---|
| Refinement | channel. |
| FTP_ITC.1.3 | The TSF shall initiate communication via the trusted channel for [assignment: <i>list of services for which the TSF is able to initiate communications</i>]. |
| Refinement | [assignment: <i>list of services for which the TSF is able to initiate communications</i>] |
| | <ul style="list-style-type: none"> ▪ Electronic document transmission function ▪ Server sending function of the audit log |

FTP_TRP.1(a)**Trusted path (for Administrators)**

(for O.COMMS_PROTECTION)

| | | |
|-----------------|---|---|
| Hierarchical to | : | No other components |
| Dependencies | : | [FCS_IPSEC_EXT.1 Extended: IPsec selected, or FCS_TLS_EXT.1 Extended: TLS selected, or FCS_SSH_EXT.1 Extended: SSH selected, or FCS_HTTPS_EXT.1 Extended: HTTPS selected]. |

| | |
|----------------|---|
| FTP_TRP.1.1(a) | The TSF shall use [selection, choose at least one of: IPsec, SSH, TLS, TLS/HTTPS] to provide a trusted communication path between itself and remote administrators that is logically distinct from other communication paths and provides assured identification of its end points and protection of the communicated data from disclosure and detection of modification of the communicated data . |
| Refinement | [selection, choose at least one of: <i>IPsec, SSH, TLS, TLS/HTTPS</i>] |
| | <ul style="list-style-type: none"> ▪ IPsec |

| | |
|----------------|---|
| FTP_TRP.1.2(a) | The TSF shall permit remote administrators to initiate communication via the trusted path. |
| Refinement | |

| | |
|----------------|---|
| FTP_TRP.1.3(a) | The TSF shall require the use of the trusted path for initial administrator authentication and all remote administration actions . |
| Refinement | |

FTP_TRP.1(b)**Trusted path (for Non-administrators)**

(for O.COMMS_PROTECTION)

| | | |
|-----------------|---|---|
| Hierarchical to | : | No other components |
| Dependencies | : | [FCS_IPSEC_EXT.1 Extended: IPsec selected, or FCS_TLS_EXT.1 Extended: TLS selected, or FCS_SSH_EXT.1 Extended: SSH selected, or FCS_HTTPS_EXT.1 Extended: HTTPS selected]. |

| | |
|----------------|--|
| FTP_TRP.1.1(b) | The TSF shall use [selection, choose at least one of: IPsec, SSH, TLS, TLS/HTTPS] to provide a trusted communication path between itself and remote users that is logically distinct from other communication paths and provides assured identification of its end points and protection of the communicated data from disclosure and detection of modification of the communicated data . |
| Refinement | [selection, choose at least one of: <i>IPsec, SSH, TLS, TLS/HTTPS</i>] |
| | <ul style="list-style-type: none"> ▪ IPsec |

| | |
|----------------|---|
| FTP_TRP.1.2(b) | The TSF shall permit [selection: the TSF, remote users] to initiate communication via the trusted path. |
| Refinement | [selection: <i>the TSF, remote users</i>] |
| | <ul style="list-style-type: none"> ▪ remote users |

| | |
|----------------|--|
| FTP_TRP.1.3(b) | The TSF shall require the use of the trusted path for initial user authentication and all remote user actions . |
| Refinement | |

< Appendix B: Conditionally Mandatory Requirements (Confidential Data on Field-Replaceable Nonvolatile Storage Devices) >

6.1.9. Class FPT: Protection of the TSF

FPT_KYP_EXT.1 Extended: Protection of Key and Key Material

(for O.KEY_MATERIAL)

Hierarchical to : No other components.

Dependencies : No dependencies.

FPT_KYP_EXT.1.1 The TSF shall not store plaintext keys that are part of the keychain specified by FCS_KYC_EXT.1 in any **Field-Replaceable Nonvolatile Storage Device**.
Refinement

6.1.10. Class FCS: Cryptographic support

FCS_KYC_EXT.1 Extended: Key Chaining

(for O.STORAGE_ENCRYPTION)

Hierarchical to : No other components.

Dependencies : [FCS_COP.1(e) Cryptographic operation (Key Wrapping),
FCS_SMC_EXT.1 Extended: Submask Combining,
FCS_COP.1(f) Cryptographic operation (Key Encryption),
FCS_KDF_EXT.1 Cryptographic Operation (Key Derivation), and/or
FCS_COP.1(i) Cryptographic operation (Key Transport)]

FCS_KYC_EXT.1.1 The TSF shall maintain a key chain of: [selection: *one, using a submask as the BEV or DEK; intermediate keys originating from one or more submask(s) to the BEV or DEK using the following method(s): [selection: key wrapping as specified in FCS_COP.1(e), key combining as specified in FCS_SMC_EXT.1, key encryption as specified in FCS_COP.1(f), key derivation as specified in FCS_KDF_EXT.1, key transport as specified in FCS_COP.1(i)]*] while maintaining an effective strength of [selection: *128 bits, 256 bits*].

[selection: *one, using a submask as the BEV or DEK; intermediate ...*]

- *intermediate keys originating from one or more submask(s) to the BEV or DEK using the following method(s): [selection: key wrapping as specified in FCS_COP.1(e), key combining as specified in FCS_SMC_EXT.1, key encryption as specified in FCS_COP.1(f), key derivation as specified in FCS_KDF_EXT.1, key transport as specified in FCS_COP.1(i)]*

[selection: *key wrapping as specified in FCS_COP.1(e), key combining as specified in FCS_SMC_EXT.1, key encryption as specified in FCS_COP.1(f), key derivation as specified in FCS_KDF_EXT.1, key transport as specified in FCS_COP.1(i)*]

- *key encryption as specified in FCS_COP.1(f)*

[selection: *128 bits, 256 bits*]

- *256bit*

6.1.11. Class FDP: User data protection

FDP_DSK_EXT.1 Extended: Protection of Data on Disk

(for O.STORAGE_ENCRYPTION)

Hierarchical to : No other components

| | | |
|-----------------|---|--|
| | Dependencies | : FCS_COP.1(d) Cryptographic operation (AES Data Encryption/Decryption). |
| FDP_DSK_EXT.1.1 | The TSF shall [selection: <i>perform encryption in accordance with FCS_COP.1(d)</i> , <i>use a self-encrypting Field-Replaceable Nonvolatile Storage Device that is separately CC certified to conform to the FDE EE cPP</i>], such that any Field-Replaceable Nonvolatile Storage Device contains no plaintext User Document Data and no plaintext Confidential TSF Data. [selection: <i>perform encryption in accordance with FCS_COP.1(d)</i> , <i>use a self-encrypting Field-Replaceable Nonvolatile Storage Device that is separately CC certified to conform to the FDE EE cPP</i>] | |
| | | ▪ perform encryption in accordance with FCS_COP.1(d) |
| FDP_DSK_EXT.1.2 | The TSF shall encrypt all protected data without user intervention. | |

< Appendix D: Selection-based Requirements (Confidential Data on Field-Replaceable Nonvolatile Storage Devices) >

6.1.12. Class FCS: Cryptographic support

| | |
|------------------------------|--|
| FCS_COP.1(d) | Cryptographic operation (AES Data Encryption/Decryption) (for O.STORAGE_ENCRYPTION) |
| | Hierarchical to : No other components |
| | Dependencies : [FDP_ITC.1 Import of user data without security attributes, or FDP_ITC.2 Import of user data with security attributes, or FCS_CKM.1(b) Cryptographic key generation (Symmetric Keys)] FCS_CKM_EXT.4 Extended: Cryptographic Key Material Destruction |
| FCS_COP.1.1(d) | The TSF shall perform data encryption and decryption in accordance with a specified cryptographic algorithm AES used in [selection: <i>CBC, GCM, XTS</i>] mode and cryptographic key sizes [selection: <i>128 bits, 256 bits</i>] that meet the following: AES as specified in ISO/IEC 18033-3 , [selection: <i>CBC as specified in ISO/IEC 10116, GCM as specified in ISO/IEC 19772, and XTS as specified in IEEE 1619</i>]. [selection: <i>CBC, GCM, XTS</i>] ▪ CBC [selection: <i>128 bits, 256 bits</i>] ▪ 256bits [selection: <i>CBC as specified in ISO/IEC 10116, GCM as specified in ISO/IEC 19772, and XTS as specified in IEEE 1619</i>] ▪ CBC as specified in ISO/IEC 10116 |
| FCS_COP.1(f) | Cryptographic operation (Key Encryption) (selected from FCS_KYC_EXT.1.1) |
| | Hierarchical to : No other components |
| | Dependencies : [FDP_ITC.1 Import of user data without security attributes, or FDP_ITC.2 Import of user data with security attributes, or FCS_CKM.1(b) Cryptographic key generation (Symmetric Keys)] FCS_CKM_EXT.4 Extended: Cryptographic Key Material Destruction |
| FCS_COP.1.1(f) Refinement | The TSF shall perform key encryption and decryption in accordance with a specified cryptographic algorithm AES used in [[selection: <i>CBC, GCM</i>] mode] and cryptographic key sizes [selection: <i>128 bits, 256 bits</i>] that meet the following: [AES as specified in ISO /IEC 18033-3, [selection: <i>CBC as</i> |

specified in ISO/IEC 10116, GCM as specified in ISO/IEC 19772).

[selection: CBC, GCM]

- CBC

[selection: 128 bits, 256 bits]

- 256bits

[selection: CBC as specified in ISO/IEC 10116, GCM as specified in ISO/IEC 19772]

- CBC as specified in ISO/IEC 10116

< Appendix D: Selection-based Requirements (Protected Communications) >

6.1.13. Class FCS: Cryptographic support

FCS_IPSEC_EXT.1 Extended: IPsec selected

(selected in FTP_ITC.1.1, FTP_TRP.1.1)

Hierarchical to : No other components

Dependencies : FIA_PSK_EXT.1 Extended:Pre-Shared Key Composition
 FCS_CKM.1(a) Cryptographic Key Generation (for asymmetric keys)
 FCS_COP.1(a) Cryptographic Operation (Symmetric Encryption/decryption)
 FCS_COP.1(b) Cryptographic Operation (for signature Generation/verification)
 FCS_COP.1(c) Cryptographic Operation (Hash Algorithm)
 FCS_COP.1(g) Cryptographic Operation (for keyed-hash message authentication)
 FCS_RBG_EXT.1 Extended: Cryptographic Operation (Random Bit

FCS_IPSEC_EXT.1.1 The TSF shall implement the IPsec architecture as specified in RFC 4301.

FCS_IPSEC_EXT.1.2 The TSF shall implement [selection: *tunnel mode, transport mode*].

[selection: *tunnel mode, transport mode*]

- *transport mode*

FCS_IPSEC_EXT.1.3 The TSF shall have a nominal, final entry in the SPD that matches anything that is otherwise unmatched, and discards it.

FCS_IPSEC_EXT.1.4 The TSF shall implement the IPsec protocol ESP as defined by RFC 4303 using [selection: *the cryptographic algorithms AES-CBC-128 (as specified by RFC 3602) together with a Secure Hash Algorithm (SHA)-based HMAC, AES-CBC-256 (as specified by RFC 3602) together with a Secure Hash Algorithm (SHA)-based HMAC, AES-GCM-128 as specified in RFC 4106, AES-GCM-256 as specified in RFC 4106*].

[selection: *the cryptographic algorithms AES-CBC-128 (as specified by RFC 3602) together with a Secure Hash Algorithm (SHA)-based HMAC, AES-CBC-256 (as specified by RFC 3602) together with a Secure Hash Algorithm (SHA)-based HMAC, AES-GCM-128 as specified in RFC 4106, AES-GCM-256 as specified in RFC 4106*]

- *the cryptographic algorithms AES-CBC-128 (as specified by RFC 3602) together with a Secure Hash Algorithm (SHA)-based HMAC*
- *AES-CBC-256 (as specified by RFC 3602) together with a Secure Hash Algorithm (SHA)-based HMAC*

FCS_IPSEC_EXT.1.5 The TSF shall implement the protocol: [selection: *IKEv1, using Main Mode for Phase 1 exchanges, as defined in RFCs 2407, 2408, 2409, RFC 4109, [selection: *no other RFCs for extended sequence numbers, RFC 4304 for extended sequence numbers*], and [selection: *no other RFCs for hash**

functions, RFC 4868 for hash functions]; IKEv2 as defined in RFCs 5996 ~~(with mandatory support for NAT traversal as specified in section 2.23), 4307~~ [selection: with no support for NAT traversal, with mandatory support for NAT traversal as specified in section 2.23], and [selection: no other RFCs for hash functions, RFC 4868 for hash functions]].

[selection: IKEv1 as defined ...; IKEv2 as defined]

- IKEv1 as defined in RFCs 2407, 2408, 2409, RFC 4109, [selection: no other RFCs for extended sequence numbers, RFC 4304 for extended sequence numbers], and [selection: no other RFCs for hash functions, RFC 4868 for hash functions]

[selection: no other RFCs for extended sequence numbers, RFC 4304 for extended sequence numbers]

- RFC 4304 for extended sequence numbers

[selection: no other RFCs for hash functions, RFC 4868 for hash functions]

- RFC 4868 for hash functions

FCS_IPSEC_EXT.1.6

The TSF shall ensure the encrypted payload in the [selection: IKEv1, IKEv2] protocol uses the cryptographic algorithms AES-CBC-128, AES-CBC-256 as specified in RFC 3602 and [selection: AES-GCM-128, AES-GCM-256 as specified in RFC 5282, no other algorithm].

[selection: IKEv1, IKEv2]

- IKEv1

[selection: AES-GCM-128, AES-GCM-256 as specified in RFC 5282, no other algorithm]

- no other algorithm

FCS_IPSEC_EXT.1.7

The TSF shall ensure that IKEv1 Phase 1 exchanges use only main mode.

FCS_IPSEC_EXT.1.8

The TSF shall ensure that [selection: IKEv2 SA lifetimes can be established based on [selection: number of packets/number of bytes; length of time, where the time values can be limited to: 24 hours for Phase 1 SAs and 8 hours for Phase 2 SAs]; IKEv1 SA lifetimes can be established based on [selection: number of packets/number of bytes ; length of time, where the time values can be limited to: 24 hours for Phase 1 SAs and 8 hours for Phase 2 SAs]].

[selection: IKEv2 SA lifetimes can be established based on [selection: number of packets/number of bytes; length of time, where the time values can be limited to: 24 hours for Phase 1 SAs and 8 hours for Phase 2 SAs]; IKEv1 SA lifetimes can be established based on [selection: number of packets/number of bytes ; length of time, where the time values can be limited to: 24 hours for Phase 1 SAs and 8 hours for Phase 2 SAs]]

- IKEv1 SA lifetimes can be ...

[selection: number of packets/number of bytes; length of time, where the time values can be limited to: 24 hours for Phase 1 SAs and 8 hours for Phase 2 SAs]

- length of time, where the time values can be limited to: 24 hours for Phase 1 SAs and 8 hours for Phase 2 SAs

FCS_IPSEC_EXT.1.9

The TSF shall ensure that all IKE protocols implement DH Groups 14 (2048-bit MODP), and [selection: 24 (2048-bit MODP with 256-bit POS), 19 (256-bit Random ECP), 20 (384-bit Random ECP), 5 (1536-bit MODP)], [assignment: other DH groups that are implemented by the TOE], no other DH groups].

[selection: 24 (2048-bit MODP with 256-bit POS), 19 (256-bit Random ECP), 20 (384-bit Random ECP), 5 (1536-bit MODP), [assignment: other DH groups that are implemented by the TOE], no other DH groups]

- no other DH groups

[assignment: other DH groups that are implemented by the TOE]

- none

FCS_IPSEC_EXT.1.10

The TSF shall ensure that all IKE protocols perform Peer Authentication using the [selection: RSA, ECDSA] algorithm and Pre-shared Keys.

[selection: *RSA, ECDSA*]

- *RSA*

6.1.14. Class FCS: Cryptographic support

FCS_COP.1(g) **Cryptographic Operation (for keyed-hash message authentication)**

(selected with FCS_IPSEC_EXT.1.4)

Hierarchical to : No other components

Dependencies : ~~FDP_ITC.1 Import of user data without security attributes, or~~
~~FDP_ITC.2 Import of user data with security attributes, or~~
 FCS_CKM.1(b) Cryptographic key generation (Symmetric Keys)
 FCS_CKM_EXT.4 Extended: Cryptographic Key Material Destruction

FCS_COP.1.1(g) Refinement The TSF shall perform **keyed-hash message authentication** in accordance with a specified cryptographic algorithm **HMAC**-[selection: *SHA-1, SHA-224, SHA-256, SHA-384, SHA-512*], **key size** [assignment: **key size (in bits) used in HMAC**], and **message digest sizes** [selection: *160, 224, 256, 384, 512*] **bits** that meet the following: **FIPS PUB 198-1, “The Keyed-Hash Message Authentication Code, and FIPS PUB 180-3, “Secure Hash Standard.”**

[selection: *SHA-1, SHA-224, SHA-256, SHA-384, SHA-512*]

- *SHA-1*
- *SHA-256*
- *SHA-384*
- *SHA-512*

[assignment: *key size (in bits) used in HMAC*]

- *160~512bits*

[selection: *160, 224, 256, 384, 512*]

- *160*
- *256*
- *384*
- *512*

6.1.15. Class FIA: Identification and authentication

FIA_PSK_EXT.1 **Extended: Pre-Shared Key Composition**

(selected with FCS_IPSEC_EXT.1.4)

Hierarchical to : No other components

Dependencies : FCS_RBG_EXT.1 Extended: Cryptographic Operation (Random Bit Generation)

FIA_PSK_EXT.1.1 The TSF shall be able to use pre-shared keys for IPsec.

FIA_PSK_EXT.1.2 The TSF shall be able to accept text-based pre-shared keys that are:

- 22 characters in length and [selection: [assignment: *other supported lengths*], *no other lengths*];
- composed of any combination of upper and lower case letters, numbers, and special characters (that include: “!”, “@”, “#”, “\$”, “%”, “^”, “&”, “*”, “(”, and “)”).

[selection: [assignment: *other supported lengths*], *no other lengths*]

- *no other lengths*

- FIA_PSK_EXT.1.3 The TSF shall condition the text-based pre-shared keys by using [selection: *SHA-1, SHA-256, SHA-512*, [assignment: *method of conditioning text string*]] and be able to [selection: *use no other pre-shared keys; accept bit-based pre-shared keys; generate bit-based pre-shared keys using the random bit generator specified in FCS_RBG_EXT.1*].
- [selection: *SHA-1, SHA-256, SHA-512*, [assignment: *method of conditioning text string*]]
- SHA-1
 - SHA-256
 - SHA-512
 - [assignment: *method of conditioning text string*]
- [assignment: *method of conditioning text string*]
- SHA-384
- [selection: *use no other pre-shared keys; accept bit-based pre-shared keys; generate bit-based pre-shared keys using the random bit generator specified in FCS_RBG_EXT.1*]
- use no other pre-shared keys

< Appendix D: Selection-based Requirements (Trusted Update) >

6.1.16. Class FCS: Cryptographic support

- FCS_COP.1(c) Cryptographic operation (Hash Algorithm)**
 (selected in FPT_TUD_EXT.1.3, or with FCS_SNI_EXT.1.1)
 Hierarchical to : No other components
 Dependencies : No dependencies.
- FCS_COP.1.1(c) The TSF shall perform **cryptographic hashing services** in accordance with [selection: *SHA-1, SHA-256, SHA-384, SHA-512*] that meet the following: [ISO/IEC 10118-3:2004].
- Refinement [selection: *SHA-1, SHA-256, SHA-384, SHA-512*]
- SHA-1, SHA-256, SHA-384, SHA-512

6.2. Security assurance requirements

This section describes Security Assurance Requirements (SARs) for the TOE.

Table 6-11 TOE Security Assurance Requirements

| Assurance Class | Assurance Components | Assurance Components Description |
|----------------------------|----------------------|---|
| Security Target Evaluation | ASE_CCL.1 | Conformance claims |
| | ASE_ECD.1 | Extended components definition |
| | ASE_INT.1 | ST introduction |
| | ASE_OBJ.1 | Security objectives for the operational environment |
| | ASE_REQ.1 | Stated security requirements |
| | ASE_SPD.1 | Security Problem Definition |
| | ASE_TSS.1 | TOE Summary Specification |
| Development | ADV_FSP.1 | Basic functional specification |
| Guidance Documents | AGD_OPE.1 | Operational user guidance |
| | AGD_PRE.1 | Preparative procedures |

| | | |
|--------------------------|-----------|-----------------------------------|
| Life-cycle support | ALC_CMC.1 | Labelling of the TOE |
| | ALC_CMS.1 | TOE CM coverage |
| Tests | ATE_IND.1 | Independent testing – Conformance |
| Vulnerability assessment | AVA_VAN.1 | Vulnerability survey |

6.3. Security requirements rationale

6.3.1. The dependencies of security requirements

The dependencies between TOE security functional requirements are shown in the table below.

Table 6-12 The dependencies of security requirements

| Functional requirements | Dependency relationship | ST-satisfied dependencies | Requirements that do not meet dependency |
|-------------------------|--|--|---|
| FAU_GEN.1 | FPT_STM.1 | FPT_STM.1 | N/A |
| FAU_GEN.2 | FPT_STM.1 FIA_UID.1 | FAU_GEN.1 FIA_UID.1 | N/A |
| FAU_STG_EXT.1 | FPT_STM.1 FTP_ITC.1 | FAU_GEN.1 FTP_ITC.1 | N/A |
| FCS_CKM.1(a) | [FCS_COP.1(b), Or FCS_COP.1(i)] FCS_CKM_EXT.4 | FCS_COP.1(b) FCS_CKM_EXT.4 | N/A |
| FCS_CKM.1(b) | [FCS_COP.1(a), Or FCS_COP.1(d), Or FCS_COP.1(e), Or FCS_COP.1(f), Or FCS_COP.1(g), Or FCS_COP.1(h)] FCS_CKM_EXT.4 FCS_RBG_EXT.1 | FCS_COP.1(a) FCS_COP.1(d) FCS_COP.1(e) FCS_COP.1(f) FCS_COP.1(g) FCS_COP.1(h) FCS_CKM_EXT.4 FCS_RBG_EXT.1 | N/A |
| FCS_CKM_EXT.4 | [FCS_CKM.1(a), Or FCS_CKM.1(b)] FCS_CKM.4 | FCS_CKM.1(a) FCS_CKM.1(b) FCS_CKM.4 | N/A |
| FCS_CKM.4 | [FCS_CKM.1(a), Or FCS_CKM.1(b)] | FCS_CKM.1(a) FCS_CKM.1(b) | N/A |
| FCS_COP.1(a) | FCS_CKM.1(b) FCS_CKM_EXT.4 | FCS_CKM.1(b) FCS_CKM_EXT.4 | N/A |
| FCS_COP.1(b) | FCS_CKM.1(a) FCS_CKM_EXT.4 | FCS_CKM.1(a) FCS_CKM_EXT.4 | For IPsec communication (FCS_IPSEC_EXT.1). In the case of the update function (FPT_TUD_EXT.1), FCS_CKM.1(a) and FCS_CKM_EXT.4 are not satisfied, but there is no problem because key generation is not performed. |
| FCS_RBG_EXT.1 | No dependencies. | No dependencies. | N/A |
| FDP_ACC.1 | FDP_ACF.1 | FDP_ACF.1 | N/A |

| Functional requirements | Dependency relationship | ST-satisfied dependencies | Requirements that do not meet dependency |
|-------------------------|---|-------------------------------------|--|
| FDP_ACF.1 | FDP_ACC.1 FMT_MSA.3 | FDP_ACC.1 FMT_MSA.3 | N/A |
| FIA_AFL.1 | FIA_UAU.1 | FIA_UAU.1 | N/A |
| FIA_ATD.1 | No dependencies. | No dependencies. | N/A |
| FIA_PMG_EXT.1 | No dependencies. | No dependencies. | N/A |
| FIA_UAU.1 | FIA_UID.1 | FIA_UID.1 | N/A |
| FIA_UAU.7 | FIA_UAU.1 | FIA_UAU.1 | N/A |
| FIA_UID.1 | No dependencies. | No dependencies. | N/A |
| FIA_USB.1 | FIA_ATD.1 | FIA_ATD.1 | N/A |
| FMT_MOF.1 | FMT_SMF.1 FMT_SMR.1 | FMT_SMF.1 FMT_SMR.1 | N/A |
| FMT_MSA.1 | FDP_ACC.1 FMT_SMR.1 FMT_SMF.1 | FDP_ACC.1 FMT_SMR.1 FMT_SMF.1 | N/A |
| FMT_MSA.3 | FMT_MSA.1 FMT_SMR.1 | FMT_MSA.1 FMT_SMR.1 | N/A |
| FMT_MTD.1 | FMT_SMR.1 FMT_SMF.1 | FMT_SMR.1 FMT_SMF.1 | N/A |
| FMT_SMF.1 | No dependencies. | No dependencies. | N/A |
| FMT_SMR.1 | FIA_UID.1 | FIA_UID.1 | N/A |
| FPT_SKP_EXT.1 | No dependencies. | No dependencies. | N/A |
| FPT_STM.1 | No dependencies. | No dependencies. | N/A |
| FPT_TST_EXT.1 | No dependencies. | No dependencies. | N/A |
| FPT_TUD_EXT.1 | FCS_COP.1(b) FCS_COP.1(c) | FCS_COP.1(b) FCS_COP.1(c) | N/A |
| FTA_SSL.3 | No dependencies. | No dependencies. | N/A |
| FTP_ITC.1 | [FCS_IPSEC_EXT.1, Or FCS_TLS_EXT.1, Or FCS_SSH_EXT.1, Or FCS_HTTPS_EXT.1] | FCS_IPSEC_EXT.1 | N/A |
| FTP_TRP.1(a) | [FCS_IPSEC_EXT.1, Or FCS_TLS_EXT.1, Or FCS_SSH_EXT.1, Or FCS_HTTPS_EXT.1] | FCS_IPSEC_EXT.1 | N/A |
| FTP_TRP.1(b) | [FCS_IPSEC_EXT.1, or FCS_TLS_EXT.1, or FCS_SSH_EXT.1, or FCS_HTTPS_EXT.1] | FCS_IPSEC_EXT.1 | N/A |
| FPT_KYP_EXT.1 | No dependencies. | No dependencies. | N/A |
| FCS_KYC_EXT.1 | [FCS_COP.1(e), FCS_SMC_EXT.1, | FCS_COP.1(f) | N/A |

| Functional requirements | Dependency relationship | ST-satisfied dependencies | Requirements that do not meet dependency |
|-------------------------|--|--|---|
| | FCS_COP.1(f), FCS_KDF_EXT.1, And/or FCS_COP.1(i)] | | |
| FDP_DSK_EXT.1 | FCS_COP.1(d) | FCS_COP.1(d) | N/A |
| FCS_COP.1(d) | FCS_CKM.1(b) FCS_CKM_EXT.4 | FCS_CKM.1(b) FCS_CKM_EXT.4 | N/A |
| FCS_COP.1(f) | FCS_CKM.1(b) FCS_CKM_EXT.4 | FCS_CKM.1(b) FCS_CKM_EXT.4 | N/A |
| FCS_IPSEC_EXT.1 | FIA_PSK_EXT.1 FCS_CKM.1(a) FCS_COP.1(a) FCS_COP.1(b) FCS_COP.1(c) FCS_COP.1(g) FCS_RBG_EXT.1 | FIA_PSK_EXT.1 FCS_CKM.1(a) FCS_COP.1(a) FCS_COP.1(b) FCS_COP.1(c) FCS_COP.1(g) FCS_RBG_EXT.1 | N/A |
| FCS_COP.1(g) | FCS_CKM.1(b) FCS_CKM_EXT.4 | FCS_CKM.1(b) FCS_CKM_EXT.4 | N/A |
| FIA_PSK_EXT.1 | FCS_RBG_EXT.1 | - | Because bit-based pre-shared key generation using random bit generator is not selected. |
| FCS_COP.1(c) | No dependencies. | No dependencies. | N/A |

7. TOE Summary specification

Table 7-1 shows a list of TOE's security functions derived from TOE's security function requirements. Details are described in the following sections.

Table 7-1 List of Security Functions

| No. | Security function name |
|-----|--|
| 1 | Identification and authentication function |
| 2 | Access control function |
| 3 | Storage encryption function |
| 4 | Trusted communications function |
| 5 | Security management function |
| 6 | Audit function |
| 7 | Software update verification function |
| 8 | Self-testing function |

7.1. Identification and authentication function

FIA_UAU.1, FIA_UID.1

<Identification and Authentication of general users>

TOE acquires the user name and password from the user and performs identification and authentication by the main unit authentication method. Only those who are judged as authorized users as a result of verification are allowed to use TOE. The user enters the user name and password into TOE using the operation panel or printer driver (when using Web Connection, this item does not apply because only the management function can be performed in Web Connection). TOE confirms that the registered username/password matches. Only the following operations can be performed before authentication is performed

- Checking the machine condition (the state of the reserved job, paper size in the paper tray, remaining quantity, etc.)
- Confirmation and modification of settings not related to the security function (settings related to printing, such as paper setting, image adjustment, and finisher position adjustment)
- Viewing the transmission history of scan data by scan operation, output history by copy operation, output history by printer driver, unoutput history that is the history of the job whose output was canceled, and output reservation for a job whose output was not completed
- Set the auto-reset time.

If the user performs the identification and authentication operation of the administrator while the user is permitted to use the TOE as a general user, the use of the TOE as a general user becomes impossible (logout) and the management function is permitted as another user. At the end of use of the management function, the TOE will not be available as the original general user.

<Identification and Authentication of Administrator>

Administrator identification and authentication mechanisms differ from those of general users.

In the operation panel or web browser (when using Web Connection), TOE asks the user to enter an administrator password when the user transitions to the screen where the management function can be used. The user who knows the administrator password is called the administrator. The user is not required to enter the user name here (the general user cannot combine the administrator positions) because the operation to be moved to the administrator setting screen is regarded as an identification. TOE acquires the administrator password from the user and performs identification and authentication by the main unit authentication method. Only those who are judged as the administrator as a result of the

verification are allowed to use the TOE management function. The user enters the administrator password into TOE using the operation panel or the web browser (when using Web Connection). Administrator authentication cannot be performed from the printer driver. TOE confirms that the registered administrator password matches. No management function can be performed prior to the execution of identification and authentication.

In addition, when the user is allowed to use the management function, the identification and authentication operation cannot be performed as a general user (no means exists).

FIA_AFL.1

If authentication fails (once) for administrator and user authentication in the operation panel and administrator identification and authentication in the Web Connection, TOE will not perform the next authentication attempt on the user for five seconds. If authentication fails (three times in a row) in user authentication when receiving electronic documents output by the printer driver, TOE will lock the user's account and make authentication impossible. To release the lock, TOE's secondary power OFF/ON operation is required.

FIA_PMG_EXT.1

TOE can set the following user password to combine uppercase and lowercase alphabetic characters, numbers, and the following special characters.

Table 7-2 Special Characters Available for Passwords

| Special characters (32 characters) that can be used for an administrator password | | | | | | | | | | | |
|---|---|---|----|---|---|---|---|---|---|---|---|
| ! | @ | # | \$ | % | ^ | & | * | (|) | - | ¥ |
| [|] | : | ; | , | . | / | " | ' | = | ~ | |
| ` | { | } | + | < | > | ? | _ | | | | |

| Special characters (32 characters) that can be used for general user passwords | | | | | | | | | | | |
|--|---|---|----|---|---|---|-------|---|---|---|---|
| ! | @ | # | \$ | % | ^ | & | * | (|) | - | ¥ |
| [|] | : | ; | , | . | / | Space | ' | = | ~ | |
| ` | { | } | + | < | > | ? | _ | | | | |

When a user sets or changes the user password listed below, TOE checks whether the number of characters of the new password is equal to or greater than the minimum number of characters for password (the minimum number of characters for password is set by the administrator to a range of 8 to 64 characters). If the condition is not met, the setting is not reflected and a message requesting reset is displayed.

- Administrator password
- User password

FIA_USB.1

The TOE is associated with the user identifier (User ID) and role U.NORMAL with the task to be executed on behalf of the user after user identification and authentication. After the administrator's identity is authenticated, the Admin ID and the role U.ADMIN are associated with the task to be performed on behalf of the user. Since tasks on behalf of users are associated with each interface, identification and authentication of general users and administrators can be performed from the operation panel during administrator identification and authentication in the Web Connection (only the firmware version can be confirmed in the Web Connection).

FIA_UAU.7

When a user enters a password for authentication from the operation panel or web browser, TOE displays dummy

characters (*) corresponding to the number of input characters instead of the entered characters.

FTA_SSL.3

TOE terminates the session when the following conditions are met by a user who is identified and authenticated by the operation panel, Web Connection, or printer driver.

- In the case of the operation panel, general users will be logged out one minute after the completion of processing by the last operation is completed (When the auto-reset function is disabled by any user.) or after the set auto-reset time (can be set between 1 and 9 minutes by any user). The administrator will also be logged out 30 minutes after the completion of processing by the last operation is completed and will be required to re-authenticate.
- For Web Connection, identification and authentication is successful and logs out immediately after the browser displays the firmware version.
- For printer drivers, there is no interactive session. The user logs in when the process requested by the printer driver is accepted, and logs out immediately after that process is completed.

7.2. Access control function

FDP_ACC.1, FDP_ACF.1

Based on the user data access control described in Table 6-2 and Table 6-3, TOE restricts users from using user document data and user job data. Access to each data can only be performed using the operation panel and printer driver.

(1) Restricting operations on user document data and user job data when using the operation panel

- When switching to the screen where the scan, copy, storage and retrieval functions are performed on the operation panel, identification and authentication to TOE is requested, and each function cannot be used without authentication. At this time, the administrator password cannot be logged in (functions cannot be used).
- User ID is recorded as owner information in the creation of user job data and user document data.
- After authentication, the administrator can display the list of HDD storage jobs (thumbnail image, file name, last update date, etc. on the first page of the job) and delete each job by the general user on the administrator setting screen. In addition, by setting the storage job automatic deletion period, it is possible to delete the saved job after a certain period. Modify cannot be executed for user document data and user job data stored on an HDD because I/F does not exist.
- Job owner can be a Read, Modify, Delete for user document data and user job data stored on the HDD. In the HDD Save Job List screen, the function to save/fetch a job and the output reservation of a job whose output has not been completed can be displayed. Only jobs that can be operated by the login user are displayed in this screen and other user-owned jobs are not displayed. That is, since I/F does not exist, the function to save/retrieve other user-owned jobs cannot be executed. Output reservation for jobs that have not completed output cannot be executed because there is no I/F for Read, Modify, or Delete.
- Job owner can delete user document data and user job data created by copy operation by clicking the Stop button. However, even in Job owner, Read and Modify of user document data created by copy operation and Modify of user job data cannot be executed because I/F is not present.
- Even with Job owner, Read, Modify, Delete of user document data created by scanning operation, Modify, and Delete of user job data cannot be executed because I/F is not present.
- Transmission history of scan data by scan operation, output history by copy operation, non-output history of the job whose output was canceled, and output reservation of the job whose output was not completed can be viewed by anyone, including unauthenticated users.

(2) Restrictions on operations on user document data and user job data when using the printer driver

- When executing the security print function with the printer driver, TOE performs identification authentication at the timing of data transmission by entering the user name and password in the printer driver. If the authentication

is successful, the operation indicated by the printer driver is executed, but if the authentication fails, the operation is canceled and not executed. At this time, the administrator password cannot be used to log in (each function cannot be used).

- Scan, copy, and eject functions cannot be executed by the printer driver because the I/F does not exist.
- When creating user job data and user document data, the User ID is recorded in each data as owner information.
- After identification authentication, the administrator can delete confidential jobs by general users on the administrator setting screen. Note that Read for user document data and Modify for user document data and user job data cannot be executed because there is no I/F.
- In the confidential job list display screen, only the jobs owned by the logged-in user are displayed, and the jobs owned by other users are not displayed. In other words, the job owner can Read, Modify, and Delete user document data and user job data created by using the printer driver, but Read for other users document data, and Modify and Delete for other users document data and other users' job data cannot be executed because I/F does not exist.
- The output history of confidential jobs can be viewed by anyone, including unauthorized users.

FIA_ATD.1

The TOE defines the task attributes (User ID, Admin ID) and roles (U.NORMAL, U.ADMIN) of the tasks on behalf of the user as attributes.Task attribute and role allocation timing are as follows.

- General User: When an administrator registers a user from the operation panel, U.NORMAL is assigned a unique User ID as a user attribute and a fixed role
- Administrator: Administrator has only one Admin ID and cannot be added or deleted. U.ADMIN is assigned as a fixed role

7.3. Storage encryption function

The storage device encryption function is enabled by the encryption library embedded in the main unit control firmware after TOE startup, and the encrypted area of each device cannot be accessed when it is disabled. Data is encrypted before writing to the device, and data is decrypted after reading from the device. This process is performed on all encrypted target data to be written to/read from each device. The material protection function of the encryption key used for encryption is described in detail below.

FCS_COP.1(d), FCS_KYC_EXT.1, FCS_COP.1(f), FCS_CKM.1(b), FPT_SKP_EXT.1, FPT_KYP_EXT.1

TOE implements cryptographic algorithms in accordance with the following standards. When executing the random bit generation process using CTR_DRBG, a bit string of 1024 bits is generated from the hardware entropy source, and the random number is generated by inputting the bit string into the random bit generation function of the library software (GUARD FIPS Security Toolkit) in the firmware.

Table 7-3 Cryptographic algorithm

| Algorithm | Standard | SFR Reference |
|-----------------|-----------------|------------------------------|
| CTR_DRBG | NIST SP 800-90A | FCS_RBG_EXT.1 |
| AES-CBC 256bits | ISO/IEC 10116 | FCS_COP.1(d) FCS_COP.1(f) |

TOE generates the encryption keys described in Table 7-4 to achieve storage encryption.

Table 7-4 Encryption Key for Storage Encryption

| Key type | Overview |
|--------------|---|
| DEK (256bit) | Used for data encryption on storage devices. Generated by executing random bit generation in accordance with CTR_DRBG (AES-256) in the TOE manufacturing process. |
| KEK (256bit) | Used for encryption when storing DEK. Generated by performing random number generation according to CTR_DRBG (AES-256) in the manufacturing process of TOE. |

When using TOE, the administrator will be guided to always regenerate the KEK by executing the "Cryptographic Key Change Function". When the administrator executes this function, the following process will be executed.

- (1) Read the KEK saved in the EEPROM and save it in RAM.
- (2) Reads the encrypted DEK from the EEPROM, decrypts it using the above key, and expands it in RAM.
- (3) Perform random number generation according to CTR_DRBG (AES-256) to generate a new 256-bit KEK and encrypt the DEK.
- (4) Save the KEK and the encrypted DEK in the EEPROM.

The encryption key generated by the above-mentioned means is used in the initialization process at TOE startup as follows.

- (1) When the TOE's sub power supply is turned on, the bootloader starts and reads and executes each firmware from the SSD's firmware storage area.
- (2) The TOE firmware reads the KEK key from the EEPROM and stores it in RAM.
- (3) Read the encrypted DEK from the EEPROM, decrypt it with KEK, and expand it to RAM.
- (4) The TOE firmware decrypts the setup information stored in SSD and NVRAM using the decrypted DEK, initializes all functions including the TOE security functions, and displays the basic screen on the operation panel after completion to make the TOE functions available to users.

As shown above

- The KEK key is stored in the EEPROM on the TOE board, but not in a medium that corresponds to a field-replaceable nonvolatile storage device. There is no corresponding key material.
- The DEK key is stored in encrypted form in the EEPROM on the TOE board, but is not stored on a medium that corresponds to a field-replaceable nonvolatile storage device. There is no corresponding key material.
- Decrypted DEK keys are stored in RAM only. It is not stored on a medium that corresponds to a field-replaceable nonvolatile storage device.
- There is no interface for external access to KEK/DEK keys.

Thus, the encryption key is considered to be protected.

FDP_DSK_EXT.1

TOE encrypts data using the encryption key described in Table 7-4.

In TOE, the device capable of holding encrypted user document data and confidential TSF data is an SSD/HDD that is a field-replaceable nonvolatile storage device and an NVRAM/EEPROM that is not a field-replaceable nonvolatile storage device (TSF data on RAM is erased with sub power off). Only the devices listed here are not subject to encryption because they do not handle TSF information or do not have the ability to hold TSF data when the sub power is OFF. Table 7-5 and Table 7-6 show the data to be encrypted for each device.

Table 7-5 Data to be encrypted for each device (field-replaceable nonvolatile storage device)

| Storage | Contents and areas | Encryption support method | Encryption key | Algorithm | Encryption conditions |
|--------------|--|----------------------------|----------------|-----------|-----------------------|
| SSD | SSD system area (partition table, etc.) | No encryption target | - | - | - |
| | Storage of firmware | No encryption target | - | - | - |
| | TOE Setting Information Storage Area (Set value saved by administrator) | Encrypted file system | DEK | AES(CBC) | Every minute |
| | SWAP area (disable) | Not used | - | - | - |
| HDD (RAID 0) | Job storage area (job management data/job log) | Proprietary implementation | DEK | AES(CBC) | Every minute |
| | Job storage area (image data/sumnails) | Proprietary implementation | DEK | AES(CBC) | Every minute |
| | Controller area (TOE network settings, communication destination server address, password) | Encrypted file system | DEK | AES(CBC) | Every minute |
| | Main unit control area (authentication data) | Encrypted file system | DEK | AES(CBC) | Every minute |
| | Audit log information | Encrypted file system | DEK | AES(CBC) | Every minute |

Table 7-6 Data to be encrypted for each device (other than field-replaceable nonvolatile storage device)

| Device | Contents and areas | Encryption support method | Encryption key | Algorithm | Encryption conditions |
|--------|--|---|----------------|-----------|-----------------------|
| NVRAM | TOE setting information storage area (password information excluding user authentication, scan function destination/audit log destination setting) | Encrypt and save password information (Plaintext if the area does not fall under the above) | DEK | AES(CBC) | Every minute |
| EEPROM | DEK | Encrypted and saved | KEK | AES(CBC) | Every minute |
| | KEK | As plaintext | - | - | - |

The items described in Table 7-5 and Table 7-6 are described.

- The encrypted file system is a file system software that manages the read/write of all files of the partition (area) described as "encrypted file system" in the encryption support method column and performs encryption and decryption processing without fail. There is no interface that can avoid encryption and decryption processing. Encryption by the encrypted file system is enabled in the TOE manufacturing process at Konica Minolta's plant (DEK keys are generated and used in the encrypted file system). Therefore, the administrator does not need to activate the encryption function (there is no way to disable it).
- The "job storage area (job management data/job blog)" of the HDD is encrypted and decrypted using the interface responsible for job management data input/output. Since the job management data performs all the read/write

operations using the above interface, and the encryption and decryption processes are performed without fail, there is no interface that can avoid encryption and decryption processes. Encryption processing by the job management data I/O interface is enabled in the TOE manufacturing process at Konica Minolta's factories (DEK keys are generated and used in the job management data I/O interface). Therefore, the administrator does not need to activate the encryption function (there is no way to disable it).

- The "job storage area (image data/thumbnaill)" of the HDD is encrypted and decrypted using the interface responsible for image data input/output. Since the image data is read/Write by the above-mentioned interface and encryption/decryption processing is always performed, there is no interface that can avoid encryption/decryption processing. Encryption processing using the image data I/O interface is enabled in the TOE manufacturing process at Konica Minolta's plant (DEK keys are generated and used in the job management data I/O interface). Therefore, the administrator does not need to activate the encryption function (there is no way to disable it).
- The "storage area of the firmware" of the SSD is the area where encryption is not performed. The corresponding area is read/Write by the OS standard file system, but the interface for direct file access to the user is not provided.

FCS_RBG_EXT.1

TOE will implement a CTR DRBG (AES-256) compliant with NIST SP 800-90A and an RBG consisting of one hardware noise source. The above CTR DRBG uses Derivation Function and Reseed, but does not operate Prediction Resistance Function.

The hardware noise source is an Intel CPU (Intel® Pentium G4400 3.3GHz) with a random number generation instruction called RDRAND. The RDRAND instruction performs processing according to SP800-90A, and the following characteristics of its random number output are known from the description in Reference (*1).

- (1) The RDRAND instruction outputs a 64-bit random number for each random bit sequence request.
- (2) The RDRAND instruction generates a maximum of 511 random numbers of 128 bits from the same seed value. Therefore, by executing the RDRAND instruction 1022 times ($=511 \times (128\text{bit}/64\text{bit})$), the seed value used by RDRAND is always changed.
- (3) The output of the RDRAND instruction contains a minimum entropy of at least 0.5 bit per bit.

When TOE obtains an entropy value from a hardware noise source, it requests the RDRAND instruction 1022 times to obtain a 64-bit random number (excluding random numbers with the same seed value). This is repeated 16 times and concatenated to obtain a 1024-bit bit string. This bit sequence is assumed to contain more than 512 ($=1024 \times 0.5$) bits of entropy. After increasing the entropy rate of the entire bit by implementing such a process, it is output as an entropy value.

TOE generates random numbers using this RBG and uses them to generate the cryptographic key KEK and the cryptographic key DEK (key length: 256 bits) When TOE needs seed material (Entropy Input and Nonce) in CTR DRBG to generate random numbers, it executes the RDRAND instruction to obtain the necessary size of entropy value. The entropy value is obtained and used. This entropy value satisfies the minimum amount of entropy required for Instantiate and Reseed (256 bits in the case of TOE, the same as the security strength) shown in 10.2.1 of NIST SP800-90A and contains sufficient entropy.

(*1) Mike Hamburg, Paul Kocher, Mark E. Marson: ANALYSIS OF INTEL'S IVY BRIDGE DIGITAL RANDOM NUMBER GENERATOR. Technical Report. Cryptography Research, Inc. (March 2012)

FCS_CKM.4, FCS_CKM_EXT.4

In TOE, the cryptographic key KEK used for the storage encryption function is stored in the EEPROM, which cannot be exchanged locally, and used to protect each data including setting information related to the basic control of TOE regardless of the security enhancement settings. Table 7-7 shows KEK and DEK key storage locations and the timing of their destruction.

The administrator is advised to perform the all data overwrite and delete function when the TOE is discarded with guidance.

Table 7-7 Storage and destruction of keys

| Key | | Storage location | Timing of destruction | Method of destruction |
|-----|-----------------------|------------------|---|---|
| KEK | Key (plaintext) | EEPROM | Time of TOE destruction | Deleted by 0x00 once. |
| | Key (plaintext) | RAM | When the key is not required (when the TOE sub power is turned off) | Deleted from RAM due to TOE sub power off |
| DEK | Key (encrypted state) | EEPROM | Time of TOE destruction | Deleted by 0x00 once. |
| | Key (plaintext) | RAM | When the key is not required (when the TOE sub power is turned off) | Deleted from RAM due to TOE sub power off |

7.4. Trusted communications function

FPT_SKP_EXT.1

All pre-shared keys, symmetric keys, and private keys used in the TOE's trusted communications function are stored in the controller area of the RAM and HDD. The HDD controller area is protected by an encrypted file system (see TSS for storage encryption function for details). In addition, there is no interface for accessing cryptographic keys stored in RAM and HDD.

Thus, the encryption key is considered to be protected.

FCS_CKM.1(a)

TOE generates an RSA asymmetric key with a key length of 2048 bits in the method described in the rsakpg1-crt method described in Section 6.3.1.3 of NIST SP800-56B, Revision 2 in the generation of IPsec certificates used for key establishment of IPsec communication by PKI setting of Web Connection. Also, in the key establishment for IPsec communication (see FTP_ITC.1), an asymmetric key is generated by Diffie-Hellman Group 14 as described in the Using the Approved Safe-Prime Groups described in Section 5.6.1.1.1 of NIST SP800-56A, Revision 3.

FCS_CKM.1(b)

The TOE generates a random number using the RBG described in FCS_RBG_EXT.1 and generates a 128-bit or 256-bit symmetric encryption key at the start of IPsec communication (see FTP_ITC.1) or at the key establishment after the SA lifetime. TOE invokes the above RBG by calling the DRBG function (CTR DRBG (AES-256)) and generates a random number.

FCS_RBG_EXT.1

TOE will implement a CTR DRBG (AES-256) compliant with NIST SP 800-90A and an RBG consisting of one hardware noise source. The above CTR DRBG uses Derivation Function and Reseed, but does not operate Prediction Resistance Function.

The hardware noise source is an Intel CPU (Intel® Pentium G4400 3.3GHz) with a random number generation instruction called RDRAND. The RDRAND instruction performs processing according to SP800-90A, and the following characteristics of its random number output are known from the description in Reference (*1).

- (1) The RDRAND instruction outputs a 64-bit random number for each random bit sequence request.
- (2) The RDRAND instruction generates a maximum of 511 random numbers of 128 bits from the same seed value.

Therefore, by executing the RDRAND instruction 1022 times (=511×(128bit/64bit)), the seed value used by RDRAND is always changed.

(3) The output of the RDRAND instruction contains a minimum entropy of at least 0.5 bit per bit.

When TOE obtains an entropy value from a hardware noise source, it requests the RDRAND instruction 1022 times to obtain a 64-bit random number (excluding random numbers with the same seed value). This is repeated 16 times and concatenated to obtain a 1024-bit bit string. This bit sequence is assumed to contain more than 512 (=1024 × 0.5) bits of entropy. After increasing the entropy rate of the entire bit by implementing such a process, it is output as an entropy value.

TOE uses this RBG to generate random numbers for cryptographic key generation, etc. When TOE needs seed material (Entropy Input and Nonce) in the CTR DRBG to generate random numbers, it executes the RDRAND instruction to obtain an entropy value of the required size for use. This entropy value satisfies the minimum amount of entropy required for Instantiate and Reseed (256 bits in the case of TOE, the same as the security strength) shown in 10.2.1 of NIST SP800-90A and contains sufficient entropy.

(*1) Mike Hamburg, Paul Kocher, Mark E. Marson: ANALYSIS OF INTEL'S IVY BRIDGE DIGITAL RANDOM NUMBER GENERATOR. Technical Report. Cryptography Research, Inc. (March 2012)

FCS_COP.1(a)

TOE uses an AES-CBC with a key length of 128 bits and 256 bits conforming to FIPS PUB 197 and NIST SP 800-38A as an ESP cryptographic algorithm for IPsec communication. The IKEv1 cryptographic algorithm uses an AES-CBC with a key length of 128 bits and 256 bits that conform to FIPS PUB 197 and NIST SP 800-38A.

FTP_TRP.1(a), FTP_TRP.1(b)

TOE performs encrypted communication in communication with other reliable IT devices. The following functions are subject to encryption communication.

Table 7-8 Functions subject to encrypted communications

| Recipient of communication | User | Contents and functions of the communication to be encrypted | Protocol |
|----------------------------|----------------|---|----------|
| Client PC | Administrators | Use of Web Connection by browser | IPsec |
| Client PC | General User | Receives electronic documents output by the printer driver | IPsec |

FTP_ITC.1

TOE performs encrypted communication with IT devices. The encrypted communication provided by TOE is as follows. (When security enhancement setting is enabled)

Table 7-9 Encrypted communication provided by TOE

| Recipient of communication | Protocol | Cryptographic algorithms | Associated interface |
|----------------------------|----------|--------------------------|--|
| File server (FTP) | IPsec | AES(128bits、256bits) | Execute scan function from the operation panel |
| File server (WebDAV) | IPsec | AES(128bits、256bits) | Execute scan function from the operation panel |
| File server (SMB) | IPsec | AES(128bits、256bits) | Execute scan function from the operation panel |
| Audit log server (syslog) | IPsec | AES(128bits、256bits) | See Table 7-13 |

FCS_IPSEC_EXT.1, FCS_COP.1(g), FCS_COP.1(b), FCS_COP.1(c)

In the IPsec protocol used by TOE, the following settings are available and no other settings are available. Multiple items are items that can be selected by the administrator. Only the administrator can set or change this item.

- IPsec Encapsulation Settings: Transport Mode
- Security Protocol: ESP
 - ESP cryptographic algorithm: AES_CBC-128, AES_CBC-256

- ESP authentication algorithm: HMAC-SHA-1, HMAC-SHA-256, HMAC-SHA-384, and HMAC-SHA-512
 - ※By the above selection, message digest length is 160 bits and 160 bits HMAC-SHA-1, message digest length is 256 bits and 256 bits HMAC-SHA-256, message digest length is 384 bits and 384 bits HMAC-SHA-384, and message digest length is 512 bits and 512 bits of HMAC-SHA-512, and message authentication code (HMAC) is used to communicate using keyed hashing.
 - ※The hash algorithm uses SHA-1, SHA-256, SHA-384, and SHA-512 (conforming to ISO/IEC 10118-3:2004) according to FCS_COP.1(c).
 - ※ESP supports extended sequence number (ESN).

- Key Exchange Method: IKEv1

<Setting with IKEv1>

- IKEv1 cryptographic algorithm: AES_CBC-128, AES_CBC-256
- IKEv1 authentication algorithm: SHA-1, SHA-256, SHA-384, SHA-512 compliant with ISO/IEC 10118-3:2004
- Negotiation mode: Main Mode
- Phase 1 (main mode) key valid time: 600 to 86,400 seconds
- Phase 2 (Quick mode) Key validity time: 600 to 28,800 seconds
- Diffie-Hellman Group: Group 14
- Peer authentication method: digital signature (according to RSA digital signature algorithm (rDSA) 2048 bits, FIPS PUB 186-4, "Digital Signature Standard"), hash algorithm: SHA-256 (according to ISO/IEC 10118-3:2004), pre-shared key

The TOE implements the IPsec Security Policy Database (SPD) and the following settings can be made by the administrator.

- IPsec Policy: Allows administrator to specify the conditions of IP packets and select the action to be taken (protect, pass, or discard) for IP packets that meet each condition. IPsec policy can be set up to 10 groups (IP policy group 1-10), and is applied to both sending and receiving packets. When multiple IPsec policies are set for one communication partner, regardless of the registration order of IPsec policy groups 1-10, the operation is applied in the following priority order.
 - Priority: High protection > Discard > Passage priority: Low
- Default Action: Select from the following options what to do if there are no settings that match IPsec policy. (Guidance is given to the administrator to choose to destroy this setting.)
 - Discard: Discard IP packets that do not match the IPsec policy setting
 - Passing: Passing IP packets that do not match the IPsec policy setting

FIA_PSK_EXT.1

The TOE uses the following text-based pre-shared key as the pre-shared key for IPsec. The text-based prior shared key is converted into a bit string using the hash algorithm described below.

- Text-based pre-shared key
 - Length: 22 characters
 - Available Characters: strings of ASCII characters (combining uppercase and lowercase alphabetic characters, numeric characters, and special characters ("!", "@", "#", "\$", "%", "&", "*", "(", ")")), or HEX Values
 - Conditioning Methods: SHA-1, SHA-256, SHA-384, and SHA-512

FCS_CKM.4, FCS_CKM_EXT.4

In TOE, the encryption keys used for the trusted communications function and their key materials are stored in the controller area of the HDD or in the RAM, and are used for key exchange, authentication, or encryption of communications at the time of establishing the secure communication. Table 7-10 shows the storage destination of keys

and keys used for IPsec communication and the method of destruction. The pre-shared key set by the administrator and the private key of the IPsec certificate are stored on the HDD, and the timing when it becomes unnecessary is limited to when the TOE is discarded. Guidance indicates that all data overwrite and delete function should be performed by the administrator when the TOE is discarded. In the all data overwrite and delete function, the encryption key storage area are overwritten once with a fixed value (0). Session keys (temporary encryption keys) used in IPsec etc. are stored in RAM. These items are deleted because they are no longer needed when the TOE sub power is turned off.

Table 7-10 Destination and Destination of Key

| Key | Storage destination | Timing of destruction | Method of destruction |
|--|---------------------|--|--|
| IPsec certificate key pair | HDD | When the TOE is destroyed. | Deleted by 0x00 |
| IPsec pre-shared key | HDD | When the TOE is destroyed. | Deleted by 0x00 |
| IPsec cookie/nonce | RAM | When a key is not required (when the TOE sub-power supply is turned off) | Deleted from RAM due to TOE sub-power shutdown |
| Shared secret key for IKE (generated in IKEv1 Phase 1) | RAM | When a key is not required (when the TOE sub-power supply is turned off) | Deleted from RAM due to TOE sub-power shutdown |
| Shared secret key for IPsec (Generated in IKEv1 Phase 2) | RAM | When a key is not required (when the TOE sub-power supply is turned off) | Deleted from RAM due to TOE sub-power shutdown |
| IPsec Diffie-Hellman common key | RAM | When a key is not required (when the TOE sub-power supply is turned off) | Deleted from RAM due to TOE sub-power shutdown |

7.5. Security management function

FMT_MOF.1, FMT_SMF.1, FIA_UID.1, FMT_SMR.1, FMT_MSA.1, FMT_MSA.3, FMT_MTD.1

TOE provides users with the following management functions. Each management function is operable only from the interface described. When switching to the screen where the following management functions are executed on the operation panel, identification and authentication to TOE is requested, and the management function cannot be used without authentication. Upon successful identification and authentication, the user is associated with a role (U.ADMIN, U.NORMAL) and allowed to use the functions provided for each role. In addition, the associated role is retained until logout. TOE assigns the User ID of the user who created the user document data and user job data as the Job owner in the access control of Table 6-2 and Table 6-3. TOE does not have the function to overwrite the assigned User ID.

Table 7-11 Administrative functions provided to U.ADMIN

| Management function | Description | Permitted operations | Operable interface |
|--|---|-------------------------------|--------------------|
| Security enhancement setting function | Enable/disable security enhancement settings. | Change | Operation panel |
| Audit log destination setting function | Set audit log transmission (network setting such as IP address of destination server). | Change | Operation panel |
| User management | U.ADMIN can register, modify, or delete users with a User ID (including the function to set the login password for U.NORMAL by U.ADMIN). The user | To modify, delete, and create | Operation panel |

| Management function | Description | Permitted operations | Operable interface |
|--|--|----------------------|--------------------|
| | data access control described in Table 6-2 and Table 6-3 is used for user registration to set the appropriate initial value for the attribute. | | |
| U.ADMIN login password change function | U.ADMIN changes the administrator password | Change | Operation panel |
| Function to change the date and time information | Set the date and time information. | Change | Operation panel |
| Password rule modification function | Set and change the Password rule (the minimum number of characters for password setting). | Change | Operation panel |
| Registering and modifying network settings | Set and change network settings (e.g., IP address of TOE, IP address of DNS server, port number, NetBIOS name, IPsec setting, etc.). | Change | Operation panel |
| Change the encryption key | Change the encryption key (KEK) used by the Storage Encryption function. | Change | Operation panel |
| Firmware update function | Execute firmware update of TOE. | Execution | Operation panel |
| All data overwrite and delete function | Overwrite the encryption key storage area once with a fixed value (0). | Execution | Operation panel |
| Service login permission setting function | Allow/disable service mode | Change | Operation panel |

Table 7-12 Administrative functions provided to U.NORMAL

| Management function | Description | Permitted operations | Operable interface |
|--|---------------------------------------|----------------------|--------------------|
| Function to set the login password of U.NORMAL | U.NORMAL sets its own login password. | Change | Operation panel |

7.6. Audit function

TOE generates and records an audit log for the event being audited and sends it to the log server.

FAU_GEN.1, FAU_GEN.2

The TOE defines the following events as the event to be audited and records the event occurrence time (month, day, hour, second), event type, subject identification information, and event results.

Table 7-13 List of Audited Events

| Event to be audited | ID (Subject Identification Information *1) | Results | Associated interface |
|---|--|---------|-----------------------------|
| Executing administrator authentication | Admin ID | OK/NG | FIA_UAU.1, See FIA_UID.1 |
| Changing/registering administrator password | Admin ID | OK | See Table 7-11 |
| Executing user authentication | User ID/unregistered ID | OK/NG | FIA_UAU.1, See FIA_UID.1 |

| Event to be audited | ID (Subject Identification Information *1) | Results | Associated interface |
|--|--|-----------|-----------------------------|
| Creation of users by administrators | Admin ID | OK | See Table 7-11 |
| Changing/registering user passwords by administrator | Admin ID | OK | See Table 7-11 |
| Deleting a user by administrator | Admin ID | OK | See Table 7-11 |
| Changing user attributes by administrator | Admin ID | OK | See Table 7-11 |
| Changing user attributes by user (e.g. changing user password) | User ID | OK | See Table 7-12 |
| Changing security enhancement settings | Admin ID | OK/NG | See Table 7-11 |
| Changing Password rule settings | Admin ID | OK | See Table 7-11 |
| Changing network settings | Admin ID | OK | See Table 7-11 |
| Changing service login permission settings. | Admin ID | OK | See Table 7-11 |
| Changing the destination settings for the audit log | Admin ID | OK | See Table 7-11 |
| Changing the encryption key | Admin ID | OK | See Table 7-11 |
| Executing the firmware update function (ISW) | Admin ID | OK/NG | See Table 7-11 |
| Setting Date and Time | Admin ID | OK | See Table 7-11 |
| Starting the Audit Function | Unregistered ID | OK | Secondary power supply |
| Termination of the audit function | Unregistered ID | OK | Secondary power supply |
| Deleting stored jobs | User ID / Admin ID | OK | See FDP_ACC.1 and FDP_ACF.1 |
| Printing a copy job | User ID | OK/NG | See FDP_ACC.1 and FDP_ACF.1 |
| Saving a copy job | User ID | OK/NG | See FDP_ACC.1 and FDP_ACF.1 |
| Printing a print job | User ID | OK/NG | See FDP_ACC.1 and FDP_ACF.1 |
| Saving a print job | User ID | OK/NG | See FDP_ACC.1 and FDP_ACF.1 |
| Executing a scan job | User ID | OK/NG | See FDP_ACC.1 and FDP_ACF.1 |
| Printing stored jobs | User ID | OK/NG | See FDP_ACC.1 and FDP_ACF.1 |
| Modify/Restore (move/duplicate) stored jobs | User ID | OK/NG | See FDP_ACC.1 and FDP_ACF.1 |
| Reading stored jobs | User ID | OK/NG | See FDP_ACC.1 and FDP_ACF.1 |
| Failure to establish an IPsec session | Unregistered ID | ErrNo(*2) | See FTP_ITC.1 |

(*1) The fixed value of unregistered ID as subject identification information is recorded for the subject event that occurred before identification and authentication.

(*2) Records error information indicating the cause of the IPsec session failure

FAU_STG_EXT.1

Recorded audit log information is retained in the TOE and then log files are transmitted according to the external audit server (syslog) set by the administrator. See Table 7-14 for the log transmission timing.

Table 7-14 Audit Log Information Specifications

| | |
|--|---|
| Handling of audit log information | Overview |
| Storage area of log information | HDD area encrypted with storage encryption function |
| Log information transmission timing | When the event to be audited occurs (immediately) |
| Log information to be sent | Log information about the event that occurred |
| Processing in case of transmission failure | When log information cannot be sent to the log server due to network failure, etc., it is temporarily saved in HDD (*1). Up to 10,000 cases. The subsequent information is discarded when the log information reaches 10,000. The temporarily saved information is transmitted when communicating with the server, and the information on the HDD is deleted. |

(*1) It is temporarily stored in the log storage area on the HDD shown in Table 7-5. The stored information is protected from unauthorized access by encrypting it in the file system. For details, refer to TSS of FDP_DSK_EXT.1. In addition, the TOE does not provide a user interface for accessing the storage area of log information, so there is no means for reading out log information.

FPT_STM.1

TOE has a clock function and provides only the administrator with the function to change the time of TOE. Time information to be recorded in the audit log is provided by the clock function.

7.7. Software update verification function

FPT_TUD_EXT.1

TOE only grants administrators the following functions.

- Firmware version check function
- Firmware update function

The administrator can verify the firmware version in the Configure After Identification screen or in the web browser after authentication from the Web Connection.

The administrator can execute the firmware update function on the administrator setting screen after authentication. When executing firmware update, TOE verifies firmware files using the digital signature of Konica Minolta included in the firmware file as a program check after data transfer. The FW is rewritten only when it is determined that there is no problem as a result of the verification. If the digital signature verification fails (at this time, the hash value of the firmware is calculated and the hash value is stored in the encrypted file system of the SSD. This hash value data is used for the self-testing function described below), the TOE displays a warning on the operation panel and stops the update process.

FCS_COP.1(b), FCS_COP.1(c)

TOE verifies firmware files using digital signature verification as follows.

1. Firmware files include digital signature data and firmware data. Digital signature data conform to RSA digital signature algorithm (rDSA) 2048 bit, FIPS PUB 186-4, "Digital Signature Standard".
2. Decrypts the digital signature data with the public key of TOE.
3. The data decrypted above is compared with the firmware data calculated by SHA-256 in accordance with ISO/IEC 10118-3:2004. The firmware data is judged to be normal if it matches.

7.8. Self-testing function

FPT_TST_EXT.1

When TOE is sub powered on, firstly, firmware self-test is performed in the order of main control firmware and network control firmware, and then FW is read. The hash value of the main control firmware and the network control firmware, which control security functions, is calculated, and the existence of falsification is detected by checking the match with the hash value data recorded on the SSD during the firmware verification, and the integrity of the TSF execution code is verified. Since the encryption library used in TOE at this time is also subject to hash value verification, integrity is also verified. If the verification fails, the TOE displays a warning (SC code) on the operation panel and stops the operation and moves to the state where the operation is not accepted. Firmware other than the above is excluded from the firmware verification function because they do not have access to TSF data and security function execution capability and do not have access to TSF data.

If the verification fails, the TOE displays a warning (SC code) on the operation panel and stops the operation and moves to the state where the operation is not accepted.

This is sufficient to demonstrate that the TSF is operating correctly because the above process can confirm the integrity of the firmware that determines the behavior of the TSF.