

bizhub 754e / bizhub 654e / ineo 754e / ineo 654e

Security Target

This document is a translation of the evaluated and certified security target written in Japanese.

Version: 1.10

Issued on: December 8, 2014

Created by: KONICA MINOLTA, INC.

Date	Date Ver. Division			Checked	Created	Revision
2013/6/4	1.00	Office Products System	Approved Suzuki	Nakata	Chiba	Initial Version.
2013/12/17	1.01	Control Development Div. 1 Office Products System Control Development Div.1	Nabeshima	Nakata	Chiba	Deal with typos.
2014/2/10	1.02	Office Products System Control Development Div. 1	Nabeshima	Nakata	Chiba	Deal with typos.
2014/7/23	1.03	Office Products System Control Development Div. 1	Nabeshima	Nakata	Chiba	Deal with typos.
2014/10/28	1.04	Office Products System Control Development Div. 1	Nabeshima	Nakata	Chiba	Deal with typos.
2014/10/28	1.05	Office Products System Control Development Div. 1	Nabeshima	Nakata	Chiba	Deal with typos.
2014/10/30	1.06	Office Products System Control Development Div. 1	Nabeshima	Nakata	Chiba	Deal with typos.
2014/11/6	1.07	Office Products System Control Development Div. 1	Nabeshima	Nakata	Chiba	Deal with typos.
2014/11/18	1.08	Office Products System Control Development Div. 1	Nabeshima	Nakata	Chiba	Deal with typos.
2014/11/27	1.09	Office Products System Control Development Div. 1	Nabeshima	Nakata	Chiba	Deal with typos.
2014/12/8	1.10	Office Products System Control Development Div. 1	Nabeshima	Nakata	Chiba	Deal with typos.

<Revision History>

[Contents]	
1 ST Introduction	7
1.1 ST Reference	7
1.2 TOE Reference	7
1.3 TOE Overview	7
1.3.1 TOE Type	7
1.3.2 Necessary Hardware/Software for the TOE	7
1.3.3 Usage of the TOE	8
1.3.4 TOE's Main Basic Functions and Main Security Functions	9
1.4 TOE description	10
1.4.1 Physical Scope of the TOE	10
1.4.2 Guidance	12
1.4.3 Identification of TOE Components	13
1.4.4 Logical Scope of the TOE	14
1.4.5 TOE User	
1.4.6 Protected Assets	17
1.4.7 Glossary	19
1.4.8 User Box	22
2 Conformance Claims	23
2.1 CC Conformance Claim	23
2.2 PP Claim	23
2.3 Package Claim	24
2.3.1 SFR package reference	24
2.3.2 SFR Package functions	25
2.3.3 SFR Package attributes	25
2.4 PP Conformance rationale	
2.4.1 Conformance Claim with TOE type of the PP	
2.4.2 Conformance Claim with Security Problem and Security Objectives of the PP	
2.4.3 Conformance Claim with Security requirement of the PP	
3 Security Problem Definition	
3.1 Threats agents	
3.2 Threats to TOE Assets	
3.3 Organizational Security Policies for the TOE	
3.4 Assumptions	
4 Security Objectives	
4.1 Security Objectives for the TOE	
4.2 Security Objectives for the IT environment	
4.3 Security Objectives for the non-IT environment	
4.4 Security Objectives rationale	
5 Extended components definition (APE_ECD)	
5.1 FPT_FDI_EXP Restricted forwarding of data to external interfaces	
6 Security Requirements	
6.1 Security functional requirements	
6.1.2 Class FCS: Cryptographic support	

	6.1.3	3 Class FDP: User data protection	42
	6.1.4	Class FIA: Identification and authentication	48
	6.1.8	5 Class FMT: Security management	51
	6.1.6	6 Class FPT: Protection of the TSF	60
	6.1.1	7 Class FTA: TOE access	61
	6.1.8	3 Class FTP: Trusted path/channels	61
	6.2	Security assurance requirements	62
	6.3	Security requirements rationale	63
	6.3.1	Common security requirements rationale	63
	6.3.2	2 Security assurance requirements rationale	69
7	TO	E Summary specification	70
	7.1	F.AUDIT (Audit log function)	70
	7.1.1	Audit log acquirement function	70
	7.1.2	2 Audit Log Review Function	71
	7.1.3	3 Audit storage function	71
	7.1.4	1 Trusted time stamp function	71
	7.2	F.HDD_ENCRYPTION (HDD Encryption function)	71
	7.3	F.ACCESS_DOC (Accumulated documents access control function)	72
	7.4	F.ACCESS_FUNC (User restriction control function)	73
	7.5	F.RIP (Residual information deletion function)	75
	7.5.1	1 Temporary Data Deletion Function	75
	7.5.2	2 Data Complete Deletion Function	76
	7.6	F.I&A (Identification and authentication function)	76
	7.7	F.SEPARATE_EX_INTERFACE (External interface separation function)	78
	7.8	F.SELF_TEST (Self-test function)	78
	7.9	F.MANAGE (Security management function)	78
	7.10	F.SECURE_LAN (Network communication protection function)	83

	[List of Figures]	
	Figure 1-1 TOE's use environment	8
	Figure 1-2 Physical scope of the TOE	. 11
	Figure 1-3 Logical scope of the TOE	.14
	[List of Tables]	
	Table 1-1 Users	
	Table 1-2 User Data	
	Table 1-3 TSF Data	-
	Table 1-4 TSF Data	
	Table 1-5 Glossary	
	Table 1-6 System User Box	
	Table 1-7 Function user box	
	Table 1-8 Accumulated User box	.23
	Table 2-1 SFR Package functions	.25
	Table 2-2 SFR Package attributes	.25
	Table 3-1 Threats to User Data for the TOE	.29
	Table 3-2 Threats to TSF Data for the TOE	
	Table 3-3 Organizational Security Policies for the TOE	
	Table 3-4 Assumptions for the TOE.	.30
	Table 4-1 Security Objectives for the TOE	.30
	Table 4-2 Security Objectives for the IT environment	.31
	Table 4-3 Security Objectives for the non-IT environment	.31
	Table 4-4 Completeness of Security Objectives	.32
	Table 4-5 Sufficiency of Security Objectives	.33
	Table 6-1 Audit data requirements	.38
	Table 6-2 Cryptographic key algorithm key size	.41
	Table 6-3 Cryptographic operations algorithm key size standards	.41
	Table 6-4 Common Access Control SFP	.42
	Table 6-5 PRT Access Control SFP	.42
	Table 6-6 SCN Access Control SFP	.42
	Table 6-7 CPY Access Control SFP	.43
	Table 6-8 FAX Access Control SFP	.43
	Table 6-9 DSR Access Control SFP	.44
	Table 6-10 TOE Function Access Control SFP	.45
	Table 6-11 Management of Object Security Attribute	.52
	Table 6-12 Management of Subject Security Attribute	.53
	Table 6-13 Management of Subject Attribute	.54
	Table 6-14 Management of Object Attribute	.54
	Table 6-15 Characteristics Static Attribute Initialization	.55
	Table 6-16 Characteristics Static Attribute Initialization	.57
	Table 6-17 Operation of TSF Data	.57
	Table 6-18 Operation of TSF Data	.58
	Table 6-19 list of management functions	.59
	Table 6-20 IEEE 2600.1 Security Assurance Requirements	.62

Table 6-21 Completeness of security requirements	63
Table 6-22 Sufficiency of security requirements	64
Table 6-23 The dependencies of security requirements	68
Table 7-1 Names and identifiers of TOE Security Functions	70
Table 7-2 Audit Log	70
Table 7-3 Encryption Algorithm in HDD Encryption function	72
Table 7-4 Operation of document in the System user box	72
Table 7-5 Operation for documents in the function user box	
Table 7-6 Operation Settings of Overwrite Deletion function of Temporary data	75
Table 7-7 Operation settings of Data Complete Deletion Function	76
Table 7-8 Authentication method	76
Table 7-9 Password and Quality	77
Table 7-10 Process at the time of authentication failure	77
Table 7-11 Termination of interactive session	77
Table 7-12 Management Function	79
Table 7-13 Secure Print Password management function	82
Table 7-14 User Box Password management function	82
Table 7-15 Encryption Communication provided by the TOE	

1 ST Introduction

1.1 ST Reference

- ST Title :		bizhub 754e/bizhub 654e/ineo 754e/ineo 654e
- ST Version	:	1.10
- Created on	:	December 8, 2014
- Created by	:	KONICA MINOLTA, INC.

1.2 TOE Reference

- TOE Name	:	bizhub 754e/bizhub 654e/ineo 754e/ineo 654e
- TOE Version	:	G00-60
- Created by	:	KONICA MINOLTA, INC.

1.3 TOE Overview

The TOE is a digital Multi-Function Printer (hereinafter referred to as "MFP"), which requires a relatively advanced document security, operational responsibility and information assurance, and which is used in the strictly-restricted commercial information processing environment. In this environment, industrial secrets and mission-critical information are processed, and those can be subjects to laws and regulations on privacy and governance, etc., but it is not intended to deal with the danger to our lives or the problem of national security.

1.3.1 TOE Type

The TOE is the MFP used in the network environment (LAN), and has the function to accumulate documents in addition to copy, scan, print and FAX functions. The connection of FAX kit (option) is necessary to use FAX function.

1.3.2 Necessary Hardware/Software for the TOE

Hardware /Software	Used version for evaluation		
FAX kit	FK-511		
Web Browser	Microsoft Internet Explorer 8		
Printer Driver	KONICA MINOLTA 754 Series		
	PCL Ver. 3.1.0.0		
	PS Ver. 3.1.0.0		
	XPS Ver. 3.1.0.0		
Data Administrator	Ver. 1.0.06000.03221		
with Device Set-Up Utilities			

The following are the hardware and software necessary for using the TOE.

Data Administrator	4.1.24000.05011		
External Authentication Server	ActiveDirectory installed in Microsoft Windows Server 2008		
	R2 Standard Service Pack1		
DNS Server	Microsoft Windows Server 2003R2 Standard Edition Service		
	Pack2		

1.3.3 Usage of the TOE

TOE's use environment is shown below, and the usage for the TOE is described.

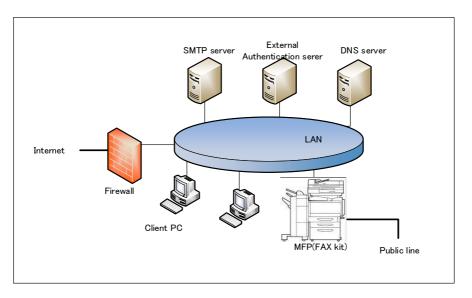


Figure 1-1 TOE's use environment

The TOE is used by connecting LAN and public line, as shown in Figure 1-1. The User can operate the TOE by communicating through the LAN or the operation panel with which the TOE is equipped. Also, this can perform copy and print¹ of image from the external memory by using USB I/F and this can be used as local print by connecting USB directly with PC. The following explain about the MFP, which is the TOE, and the hardware and software, which are not the TOE.

(1) MFP

This is the TOE. MFP is connected to the office LAN. The user can perform the following from the operation panel.

- MFP's various settings
- Paper documents' Copy, Fax TX, Accumulation as electronic documents, Network TX
- Accumulated documents' Print, Fax TX, Network TX, Deletion

¹ Function to send and print a file of the computer directly to MFP without using printer driver (Direct print)

(2) LAN

Network used for the TOE setup environment.

- (3) Public line Telephone line for transmitting to external fax.
- (4) Firewall

Device for protecting against the network attacks to intra-office LAN from the internet.

(5) Client PC

By connecting to the LAN, this works as the client of the TOE. The user can access MFP from the client PC and operate the following by installing the Web browser and the printer driver in the client PC.

- MFP's various settings
- Document Operation
- Accumulation, Print, Fax TX of electronic documents
- (6) SMTP server

Server used for sending the electronic documents in the TOE by e-mail.

(7) External Authentication server

Server to identify and authenticate TOE users. This is used only when external server authentication method is used. Kerberos authentication is used in the external server authentication method.

(8) DNS server

Server for converting domain name to IP address

1.3.4 TOE's Main Basic Functions and Main Security Functions

TOE's main basic functions are as follows.

- (1) Print
 - Function to print the print data.
- (2) Scan

Function to generate a document file by scanning paper documents.

(3) Copy

Function to copy scanned image by scanning paper documents.

(4) FAX

Function to send the scanned paper documents to the external FAX. Function to receive documents from the external FAX.

- (5) Document storage and retrieval function Function to accumulate documents in the TOE and retrieve the accumulated documents.
- (6) Shared-medium interface functionFunction to operate the TOE remotely from the Client PC by TOE users.

TOE's main security functions are as follows.

- (1) Identification and authentication function Function to identify and authenticate TOE users
- (2) Accumulated documents access control function

Function to control the operation of accumulated documents.

(3) User restriction control function

Function to control the operation of TOE functions and to control the operation to the documents other than the accumulated documents included in the performing jobs.

(4) HDD encryption function

Function to encrypt recorded data to HDD.

(5) Audit log function

Function to record the log of events related to TOE usage and security as the audit log and to refer to it.

(6) Residual information deletion function

Function to disable the reuse of the deleted documents, temporary documents or its fragmented files in the TOE.

(7) Network communication protection function

Function to prevent the disclosure of information caused by wiretapping on the network when using the LAN.

(8) Self-test function

Function to verify that HDD encryption function, encryption passphrase and TSF executable code are normal when starting MFP.

(9) Security management function

Function to control the operation to TSF data.

(10) External interface separation function

Function to disable the direct forwarding of the input from the external interface, including USB interface, to Shared-medium Interface, and also to prevent the intrusion to the LAN from the telephone line.

1.4 TOE description

This paragraph explains the overview of the physical scope of the TOE, the TOE user's definition, the logical scope of the TOE and the protected assets.

1.4.1 Physical Scope of the TOE

The TOE, as shown in Figure 1-2, is the MFP composed of main/sub power, operation panel, scanner unit, automatic document feeder, MFP controller unit, printer unit and HDD.

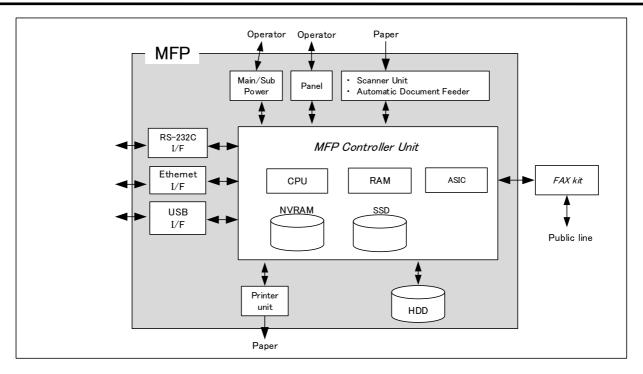


Figure 1-2 Physical scope of the TOE

- (1) Main/sub power supply Power switches for activating MFP.
- (2) Operation Panel

An exclusive control device for the operation of MFP, equipped with a touch panel of a liquid crystal monitor, numeric keypad², start key, stop key, screen switch key, etc.

- (3) Scan unit / Automatic document feeder
 A device that scans images and photos from paper and converts them into digital data.
- (4) MFP Controller unit A device that controls MFP.
- (5) CPU Central processing unit.
- (6) RAM

A volatile memory used as the working area.

(7) ASIC

An integrated circuit for specific applications which implements an HDD encryption functions for enciphering the image data written in HDD.

(8) NVRAM

² Numeric keypad is displayed on the touch panel. Hard numeric keypad is the option (Not the TOE).

A nonvolatile memory that stores TSF data that decides MFP action.

(9) SSD

A storage medium that stores the object code of the "MFP Control Software." Additionally, it stores the message data expressed in each country's language to display the response to access through the operation panel and network, and various settings that the MFP needs.

(10) Printer unit

A device to actually print the image data which were converted for printing when receiving a print request from the MFP controller.

(11) HDD

A hard disk drive of 250GB in capacity. This is used not only for storing electronic documents as files but also for working area. The HDD is not the removable nonvolatile storage device on this TOE.

(12) RS-232C I/F

Interface which is usable for the serial connection using D-sub 9-pin connectors. It is possible to use the remote diagnostic function (described later) by connecting with the public line via a modem.

(13) Ethernet I/F

Interface which supports 10BASE-T, 100BASE-TX, and Gigabit Ethernet.

(14) USB I/F

Interface which can perform copying or printing image file from an external memory, etc. Note that USB local printer connection is one-to-one, and USB I/F is not a Shared-medium interface. The access to the connected USB flash drive can be performed only from the operation panel when USB flash drive is connected.

(15) FAX kit

A device that is used for communications for FAX-data transmission and remote diagnostic via the public line. This is not included in the TOE.

1.4.2 Guidance

There are English and Japanese versions of TOE guidance, and they are distributed depending on sales areas. The following show the list of guidance.

Name		
bizhub 754e/654e	vizhub 754e/654e User's Guide (Japanese)	
bizhub 754e/654e	User's Guide Security Functions (Japanese)	1.03
bizhub 754e/654e	User's Guide	1.00


bizhub 754e/654e User's Guide [Security Operations]		1.03
ineo 754e/654e	User's Guide	1.00
ineo 754e/654e	User's Guide [Security Operations]	1.03

1.4.3 Identification of TOE Components

Each of the MFP, firmware, BIOS, MFP board, and SSD board, which compose the TOE, has its own identification. The relation between each identification and the components built in the MFP is as follows.

MFP	MFP board	Firmware	SSD board	BIOS	
bizhub 754e	A55VH020-01	A55V0Y0-F000-G00-60	A161H02C-00		
ineo 754e				A55V0Y0-1E00-G00-10	
bizhub 654e					
ineo 654e					

1.4.4 Logical Scope of the TOE

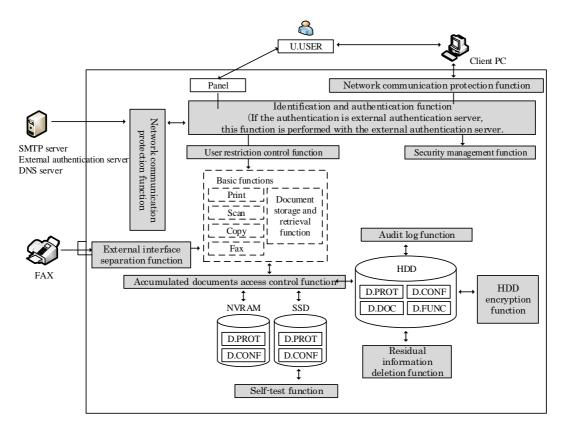

TOE security functions and the basic functions are described below.

Figure 1-3 Logical scope of the TOE

1.4.4.1 Basic Functions

TOE basic functions are described below.

(1) Print

This function prints the print data received via LAN from a client PC, and from USB interface.

(2) Scan

This function scans a document (paper) by user's operation from operation panel and generates a document file.

(3) Copy

This function scans a document (paper) by user's operation from operation panel and copies a scanned image.

(4) FAX

This function scans a paper document and sends it to external fax (FAX TX

function), and receives the document from external fax (FAX RX function).

The TOE can accumulate the documents and also can send the accumulated documents in the TOE by Fax. Documents accumulated in the TOE that can be sent by Fax is called Fax TX print. In addition, documents received by Fax are accumulated in the TOE and can be printed and deleted.

- Fax TX function

Function to send a paper document and Fax TX print to the external fax device from the telephone line. The paper document is scanned by the operation on the panel and performs Fax TX. Fax TX print is operated from the operation panel or Web browser and performs Fax TX.

- Fax RX function
 Function to receive documents through the telephone line from the external fax.
- (5) Document storage and retrieval function

This function accumulates documents in the TOE and retrieves the accumulated documents. The print data, document files generated by scanning, and documents received by Fax are also available for storing and retrieving.

(6) Shared-medium interface function

This function operates the TOE remotely from the Client PC by TOE users. Along with the guidance, Web browser or application, etc. is installed and connected with the TOE through LAN.

1.4.4.2 Security Functions

TOE security functions are described below.

(1) Identification and authentication function

This function verifies whether a person who uses the TOE is the authorized user of the TOE or not by user ID and password. If it was confirmed to be the authorized user of the TOE, this function permits the use of the TOE. There are machine authentication and external server authentication as the methods to verify, and it is authenticated by the method which was set by administrator beforehand.

This function includes the function to display the input password on the operation panel with dummy characters. Moreover, it includes the authentication lock function when the continuous number of authentication failures reaches to the setting value, and the function to register only passwords that satisfy the conditions, like minimum character of password, set by administrator for keeping the password quality.

(2) Accumulated documents access control function This function permits operation of accumulated documents for authorized user of the TOE who was authenticated by identification and authentication function, based on the authority given to the user's role or each user.

(3) User restriction control function

This function permits the operation of print, scan, copy, fax, document storage and retrieval function, and shared-medium interface function for authorized user of the TOE who was authenticated by identification and authentication function, based on the operation authority given to the user's role or each user. Also, this function takes control of the operation of documents other than accumulated documents included in executing jobs.

(4) HDD encryption function

This function encrypts data saved in the HDD for protecting against unauthorized disclosure.

(5) Audit log function

This function records logs of the events related to the TOE use and security (hereinafter, referred to as "audit event") with date and time information as the audit log, and provides the recorded audit log in the auditable form. Audit log is stored in the HDD of the TOE, but if the storage area becomes full, accepting jobs is suspended or oldest audit record stored is overwritten according to administrator's settings. Moreover, recorded audit log is permitted to read and delete only by administrator.

(6) Residual information deletion function

This function makes residual information non-reusable by overwriting the deleted documents, temporary documents, or their parts in the TOE with special data.

(7) Network communication protection function

This function prevents the disclosure of information by wiretapping on a network when using the LAN. This function encrypts the communication data between client PC and MFP, and between external authentication server / DNS server and MFP.

(8) Self-test function

This function verifies that HDD encryption function, encryption passphrase, and TSF executable code are normal when starting MFP.

(9) Security management function

This function controls the operation to TSF data for authorized user of the TOE who was authenticated by identification and authentication function based on the authority given to the user's role or each user.

(10) External interface separation function

This function prevents transferring the input from external interfaces, including USB interface, to Shared-medium Interface as it is, and prevents the intrusion to LAN from telephone line. Regarding the telephone line, this function prevents intrusion from the telephone line by limiting the input information only to FAX RX and prevents the intrusion to LAN from the telephone line by prohibiting the transfer of received fax.

1.4.4.3 Restriction

Prohibited functions and unusable functions are described below.

- FTP TX, SMB TX, WebDAV TX, IP address FAX, Internet FAX
- Bulletin Board User box, etc., which are not listed in the ST
- SNMP function
- DPWS setting
- BMLinkS setting
- LPD setting
- RAW print

- Print function other than ID&Print (By this restriction, it is stored as print authentication and print document even if print is requested with normal print settings.)

1.4.5 TOE User

TOE users (U.USER) are classified as follows.

Table 1-1 Users	
-----------------	--

	Designation	Definition
U	.USER	Any authorized User.
(A	uthorized user)	
	U.NORMAL	A User who is authorized to perform User Document Data processing
	(Public user)	functions of the TOE.
	U.ADMINISTRATOR	A User who has been specifically granted the authority to manage some
	(Administrator)	portion or all of the TOE and whose actions may affect the TOE security
		policy (TSP). Administrators may possess special privileges that provide
		capabilities to override portions of the TSP.

1.4.6 Protected Assets

Protected assets are User Data, TSF Data and Functions.

1.4.6.1 User Data

User Data are generated by or for the authorized users, which do not have any effect on the operations of TOE security functions. User data are classified as follows.

Table 1 2 User Data		
Designation	Definition	
D.DOC	User Document Data consist of the information contained in a user's document. This	
	includes the original document itself in either hardcopy or electronic form, image data,	
	or residually stored data created by the hardcopy device while processing an original	
	document and printed hardcopy output.	
D.FUNC	User Function Data are the information about a user's document or job to be processed	
	by the TOE.	

Table 1-2 User Data

1.4.6.2 TSF Data

TSF Data are data generated by or generating for the TOE, which affect TOE operations. TSF Data are classified as follows.

Designation	Definition
D.PROT	TSF Protected Data are assets for which alteration by a User who is neither an
	Administrator nor the owner of the data would have an effect on the operational security
	of the TOE, but for which disclosure is acceptable.
D.CONF	TSF Confidential Data are assets for which either disclosure or alteration by a User who
	is neither an Administrator nor the owner of the data would have an effect on the
	operational security of the TOE.

Table 1-3 TSF Data

TSF Data covered in this TOE are as follows.

Table 1-4 TSF Data

Designation	Definition
D.PROT	Auto reset time
	Auto logout time
	Authentication Failure Frequency Threshold
	Password mismatch frequency threshold
	Data which relates to access control (Authentication failure frequency, Password
	mismatch frequency, etc.)
	External server authentication setting data
	Account Name
	Operation prohibition release time of Administrator authentication
	Time information
	Network settings (IP address of SMTP server, Port No., etc., MFP IP address, etc.)
	TX address settings (address of e-mail TX, etc.)
	Password Policy
	Settings which relate to transfer of RX FAX
	User ID
	Group ID
	Box User ID

-	
	Box Group ID
	Permission Role
	Allocation Role
	Role
D.CONF	Login password
	Account password
	Encryption passphrase
	Audit log
	BOX PASSWORD
	DOC PASSWORD

1.4.6.3 Functions

Functions shown in 2.3.2 SFR Package functions.

1.4.7 Glossary

The meanings of terms used in this ST are defined.

Designation	Definition
Allocation Role	Attributes related to a user. Refer when MFP function is executed.
Box Group ID	Group ID given to a user box.
Box Type	Types of user box;
	Secure print user box, Memory RX user box, Password Encrypted
	PDF user box, ID & Print user box, Personal user box, Group user
	box, Public user box, Annotation user box, USB.
Box User ID	User ID given to a user box.
Copy Role	Role which can perform a copy.
Data Administrator	Application software to perform administrator settings from client
	PC.
Data Administrator	Device management software for administrator corresponding to
with Device Set-Up and Utilities	multiple MFP. Possible to activate Data Administrator which is
	plug-in software.
DSR Role	Role which can store data to HDD, can read out stored data in HDD,
	and can edit.
Fax Role	Role which can perform a fax function.
FTP TX	Function which uploads to FTP server by converting scanned data to
	the available file on the computer.
GROUP AUTHENTICATION	Account authentication (Authentication by account password).
HDD data overwrite deletion	Function to overwrite and delete the data on HDD.
function	
Operation settings of HDD data	Function which sets the deletion methods which are used for HDD
overwrite deletion function	data overwrite deletion function.
Panel Operation	Status which logs-in and operates the TOE from the operation

Table 1-5 Glossary

	panel.
Permission Role	Attributes related to MFP function.
Print Role	Role which can perform a print from a client PC.
Role	Role of U.USER.
	There are U.NORMAL and U.ADMINISTRATOR.
Scan Role	Role which can perform a scan.
SMB TX	Function which transmits to a computer and a public folder of server
	by converting scanned data to the available file on the computer.
User Role	Necessary role when print, scan, copy, FAX and store of files are
	performed.
Web Connection	Function to change MFP settings and confirm status by using Web
	browser of the computer on the network.
WebDAV TX	Function which uploads to WebDAV server by converting scanned
	data to the available file on the computer.
Remote diagnostic function	MFP's equipment information, such as operating state and the
	number of printed sheets, is managed by making use of the
	connection by a port of FAX public line, by a modem through
	RS-232C or by E-mail to communicate with the support center of
	MFP produced by KONICA MINOLTA, INC. In addition, if
	necessary, appropriate services (shipment of additional toner
	packages, account claim, dispatch of service engineers due to the
	failure diagnosis, etc.) are provided.
Auto Reset	Function which logs out automatically when there is not access for a
	period of set time during logging-in.
Auto Reset Time	Setup time by administrator. It logs out automatically after this
	time passes. Operation from the panel is an object.
Job	Document processing task which is sent to hard copy device. Single
	processing task can process more than one document.
Enhanced security settings	Function to set the setting which is related to the behavior of the
	security function, collectively to the secure values and maintain it.
	When this function is activated, the use of the update function of the
	TOE through the network, the initializing function of the network
	setting, and the setting change by remote diagnostic function are
	prohibited, or alert screen is displayed when it is used. The alert
	screen is displayed when the setting value is changed. Then,
	Enhanced security settings become invalid if the setting value is
	changed (only administrator can do).
Secure Print	The document which saved in the TOE with the password specified
(SECURITY DOCUMENT)	from the client PC side.
Secure Print Password	Password which is set in secure print.
(DOC PASSWORD)	-
Password mismatch frequency	Threshold that administrator sets.
threshold	The access to the user box is prohibited when number of
	continuous mismatch of user box password and input
	password reached this threshold.
	The access to the secure print is prohibited when the number of
	· · · · · · · · · · · · · · · · · · ·

	continuous mismatch of secure print password and input password reached this threshold.
Annotation User Box	User box that processing (date, numbering) is set up. When retrieving (print, send) the saved document from the user box, setup process is added.
Print job input function	Function that the TOE receives the User ID, the login password and the print data which are sent from client PC. Only when the identification and authentication of User ID and login password succeeded, the print data are received.
User box	Directory to store documents. User who can save documents and operate, is different according to a user box.
User box password	Password given to user box.
(BOX PASSWORD)	Password which only U.ADMINISTRATOR can change is shown as BOX PASSWORD.
User ID	Identification that is given to a user. The TOE specifies a user by
(User ID)	that identification.
Temporary suspension and	Temporary suspension: to temporarily suspend the login of the
Release of User ID / Account ID	considered User ID and Account ID.
	Release: to release the temporary suspension.
User management function	Function to perform registration / deletion of user and addition /
Ũ	deletion / change of the authority.
User authentication function	Function to authenticate TOE users.
	There are two types. Machine authentication (INTERNALLY
	AUTHENTICATION) and External server authentication
	(EXTERNALLY AUTHENTICATION).
	Administrator is authenticated only by Machine Authentication.
	Account ID is set to user beforehand, and the account ID is linked at
	the time of user authentication.
Management function of User	Function which sets authentication methods (MFP authentication /
Authentication	External server authentication).
Login	To identify and authenticate on the TOE by user ID and login
	password.
Login Password	Password for logging in the TOE.
(LOGIN PASSWORD)	
Encryption passphrase	Data which is used for generating encryption key which is used with
	HDD encryption. The TOE generates encryption key by using
	encryption passphrase.
External server authentication	Setting data related to the external authentication server.
setting data	(Including domain name which external server belongs to)
Audit log management function	Function which sets the operation when audit log was full, and
	which reads out and deletes the audit log.
Audit log function	Function to obtain audit logs.
Operation prohibition release time	Time until a lock is released, when the number of continuous
of Administrator authentication	authentication failure is reached to the settings and the
	administrator authentication function is locked.

Bulletin Board User Box	User box which accumulates documents for the polling TX (Fax TX
	with the request from others.
Trust Channel Function	Function to protect transmitting data via LAN by encrypting.
Trust Channel Management	Function to perform Trust Channel function, and to manage
Function	SSL/TLS server certification and cryptographic method.
Account Name	Account that user belongs to. Account is identified by account ID.
Residual information deletion	Function to delete the data on HDD by HDD data overwrite deletion
function	function.
Time information	Information of time. When any event occurred, the time information
	is recorded on audit log.
Auto logout time	Time set by administrator. Automatically logs out after the setting
	time. Web Connection is an object.
Session Auto terminate function	Function to terminate session automatically.
	Terminate the session automatically when no operation is performed
	for a certain period of time on each of Operation panel and Web
	Connection.
ID & Print function	Function to save the document which has user name and password
(AUTH PRINT)	which is sent from PC on the network as the directed print
	document.
Authentication Failure Frequency	Threshold that administrator sets. Authentication function is locked
Threshold	when number of continuous authentication failure reached this
	threshold.
Account ID	Identification of Account.
(Group ID)	
Account Password	Password used for account authentication.
(GROUP PASSWORD)	

1.4.8 User Box

This paragraph describes the user box that the TOE provides. The TOE provides the following types of User box. (This is categorized based on the characteristic of user box, but this does not necessarily match to the display on the operation panel. Also, Bulletin Board User Box, etc., exists other than this, but except the types of user box described here, cannot be used.)

User box Type	Description	
Secure Print user box	User box that stores the secure print.	
Memory RX user box	User box that stores FAX RX document.	
	When Memory RX setting is ON, RX document is saved in the Memory RX	
	user box or the accumulated user box depending on the setting when sent.	
	U.ADMINISTRATOR performs the Memory RX setting.	
Password Encrypted	User box that stores the encrypted PDF (PDF file that requires inputting	
PDF used box	password when it opened.) By specifying the document and inputting the	

Table 1-6 System User Box

	password, the document can be printed.
ID & Print user box	User box that stores documents by ID & Print function

Table 1-7 Function user box

User box Type	Description	
Accumulated user box	User box to accumulate documents	
Annotation user box	User box that can print and send the stored document data by the	
	addition of date/ time and image of filing number.	

Accumulated user box is categorized more as below.

User box Type	Description		
Accumulated user box	Personal	User box that only U.ADMINISTRATOR and the owner of	
	User Box	this user box can operate. (User who logs in with the matched	
		User ID with Box User ID of the user box)	
	Group	User box that only U.ADMINISTRATOR and the user who	
	User Box	belongs to the authorized group to use the user box can	
		operate. (User who logs in with the matched Group ID with	
		Box Group ID of the user box)	
	Public	User box that only U.ADMINISTRATOR and user who input	
	User Box	BOX PASSWORD of the user box can operate.	

2 Conformance Claims

2.1 CC Conformance Claim

This ST conforms to the following Common Criteria (hereinafter referred to as "CC").

CC version	:	Version 3.1 Release 4
CC conformance	:	CC Part 2 extended, CC Part 3 conformant
Assurance level	:	EAL3 augmented by ALC_FLR.2

2.2 PP Claim

This ST conforms to the following PP.

PP identification	:	IEEE Std 2600.1 ^{TM-} 2009
PP registration	:	CCEVS-VR-VID10340-2009
PP version	:	1.0
Date	:	June 2009

2.3 Package Claim

This ST conforms to the following SFR Packages.

Conformant
Conformant

2.3.1 SFR package reference

Title	: 2600.1-PRT, SFR Package for Hardcopy Device Print Functions, Operational Environment A
Package version	: 1.0
Date	: June 2009
Title	2600.1-SCN, SFR Package for Hardcopy Device Scan Functions, Operational Environment A
Package version	: 1.0
Date	: June 2009
Title	: 2600.1-CPY, SFR Package for Hardcopy Device Copy Functions, Operational Environment A
Package version	: 1.0
Date	: June 2009
Title	: 2600.1-FAX, SFR Package for Hardcopy Device Fax Functions, Operational Environment A
Package version	: 1.0
Date	: June 2009
Title	: 2600.1-DSR, SFR Package for Hardcopy Device Document Storage and Retrieval (DSR) Functions, Operational Environment A
Package version	: 1.0
Date	: June 2009
Title	: 2600.1-SMI, SFR Package for Hardcopy Device Shared-medium Interface Functions, Operational Environment A
Package version	: 1.0
Date	: June 2009

2.3.2 SFR Package functions

Functions perform processing, storage, and transmission of data that may be present in HCD products. The functions that are allowed, but not required in any particular conforming Security Target or Protection Profile, are listed in Table 2-1.

Designation	Definition
F.PRT	Printing: a function in which electronic document input is converted to physical document output
F.SCN	Scanning: a function in which physical document input is converted to electronic document output
F.CPY	Copying: a function in which physical document input is duplicated to physical document output
F.FAX	Faxing: a function in which physical document input is converted to a telephone-based document
	facsimile (fax) transmission, and a function in which a telephone-based document facsimile (fax)
	reception is converted to physical document output
F.DSR	Document storage and retrieval: a function in which a document is stored during one job and
	retrieved during one or more subsequent jobs
F.SMI	Shared-medium interface: a function that transmits or receives User Data or TSF Data over a
	communications medium which, in conventional practice, is or can be simultaneously accessed by
	multiple users, such as wired network media and most radio-frequency wireless media

Table 2-1 SFR Package functions

2.3.3 SFR Package attributes

When a function is performing processing, storage, or transmission of data, the identity of the function is associated with that particular data as a security attribute. This attribute in the TOE model makes it possible to distinguish differences in Security Functional Requirements that depend on the function being performed. The attributes that are allowed, but not required in any particular conforming Security Target or Protection Profile, are listed in Table 2-2.

Designation	Definition
+PRT	Indicates data that are associated with a print job.
+SCN	Indicates data that are associated with a scan job.
+CPY	Indicates data that are associated with a copy job.
+FAXIN	Indicates data that are associated with an inbound (received) fax job.
+FAXOUT	Indicates data that are associated with an outbound (sent) fax job.
+DSR	Indicates data that are associated with a document storage and retrieval job.
+SMI	Indicates data that are transmitted or received over a shared-medium interface.

Table 2-2 SFR Package attributes

2.4 PP Conformance rationale

2.4.1 Conformance Claim with TOE type of the PP

The product type that the PP intends is Hard Copy Device (Hereinafter referred to as "HCD"). The HCD is a product used for converting hard copy document to digital form (SCAN) or for converting digital document to hard copy form (PRINT) or for transmitting hard copy document through the telephone line (FAX), or for generating a copy of hard copy document (COPY).

The HCD is implemented by many different configurations depending on objectives, and in order to extend a function, there are some which have added hard disk drive, other non-volatile storage system or document server function, etc.

This TOE type is the MFP. The MFP have devices that the HCD has including additional devices and functions that the HCD has are installed. Therefore, this TOE type is consistent with the PP's TOE type.

2.4.2 Conformance Claim with Security Problem and Security Objectives of the PP

This ST adds each of OSP and Objective along with security problem of the PP, but this is consistent with the PP. The rationale is described below.

Added OSP in ST is P.HDD.CRYPTO. This requests to encrypt the data recorded in HDD. This does not give restriction relating to operational environment, but restricts the TOE. Also, the added Objective (O.HDD.CRYPTO) in the ST is corresponding to added OSP and this also does not give restriction relating to operational environment, but restricts the TOE. Therefore, the ST imposes restriction on the TOE more than the PP and imposes on TOE's operational environment equivalent to the PP. This satisfies the conditions that are equivalent or more restrictive to the PP.

2.4.3 Conformance Claim with Security requirement of the PP

The SFRs of this TOE consist of Common Security Functional Requirements, 2600.1-PRT, 2600.1-SCN, 2600.1-CPY, 2600.1-FAX, 2600.1-DSR and 2600.1-SMI.

Common Security Functional Requirements are mandatory SFRs specified by the PP and 2600.1-PRT, 2600.1-SCN, 2600.1-CPY, 2600.1-FAX, 2600.1-DSR, and 2600.1-SMI are selected from SFR Packages specified by the PP.

Security requirements of this ST include the part that is added and fleshed out to security requirements of the PP, but this is consistent with the PP. The following describes the part that is added and fleshed out, and the rationale that those are consistent with the PP.

Common Access Control SFP

The PP defines access control relating to Delete and Read of D.DOC that has attributes of +FAXIN, and Modify and Delete of D.FUNC, but anybody can cancel FAX communication that the TOE is receiving, without restriction. And so, D.DOC and D.FUNC under receiving are deleted. However, this is not the process to intend to Delete of D.DOC and D.FUNC and this is the Delete associated with the cancel of transmission. Other than it is recorded as log, this does not undermine the requirement of the PP, since this is saved in the user box after receiving and protected by becoming the object of DSR Access Control SFP. Also, it cannot Modify D.FUNC of FAX under receiving. This is the access control more restricted than PP.

The TOE defines access control relating to Modify of D.DOC that has attributes of +SCN and +FAXOUT. This is not defined in the PP, but this restricts deletion with page unit to U.NORMAL that is the owner of D.DOC. Access control relating to Delete is defined in the PP, but the TOE provides Delete function with page unit in addition to same access control with the PP. However, that operation is restricted to owner of D.DOC and this does not relax the restriction of access control SFP of the PP.

Addition of FAU_SAR.1, FAU_SAR.2, FAU_STG.1, FAU_STG.4(1), FAU_STG.4(2)

This TOE adds FAU_SAR.1, FAU_SAR.2, FAU_STG.1, FAU_STG.4(1) and FAU_STG.4(2) in accordance with the PP APPLICATION NOTE5 and PP APPLICATION NOTE7 to maintain and manage the audit log.

Addition of FCS_CKM.1, FCS_COP.1, FIA_SOS.1(2)

This TOE adds O.HDD.CRYPTO as Objectives, and with that, FCS_CKM.1, FCS_COP.1 and FIA_SOS.1(2) are added, but this does not mean to change the contents of security requirements specified by the PP.

Conformance of FDP_ACF.1(a)

FDP_ACF.1 (a) of the PP requires access control SFP that permits access only to his/her own documents and to his/her own function data. This TOE performs access control based on the security attributes of D.DOC and D.FUNC, and other than that, D.DOC and D.FUNC that are saved in the TOE is stored in the user box under protected directory and those are protected by the access control of user box. User box is protected by password, and the TOE positions user who manages user box password as the owner of D.DOC and D.FUNC in the user box and it performs access control. This will protect against unauthorized disclosure and alteration of D.DOC and D.FUNC. FDP_ACF.1 (a) of this ST requires this access control SFP. Therefore, FDP_ACF.1 (a) of this ST satisfies FDP_ACF.1 (a) of the PP.

Addition of FIA_AFL.1, FIA_SOS.1(1), FIA_UAU.6, FIA_UAU.7

Machine authentication is the function that this TOE implements. In accordance with the PP APPLICATION NOTE 36, FIA_AFL.1, FIA_SOS.1(1), FIA_UAU.6 and FIA_UAU.7 are added.

Addition of FMT_MOF.1

The TOE has the function to enable and disable Enhanced Security Setting. The TOE requires operating in the state of enabled Enhanced Security Setting by the guidance, and FMT_MOF.1 restricts the change of Enhanced Security Setting only to U.ADMINISTRATOR and prevents from unauthorized change of Enhanced Security setting. This is not the change of content of security requirement specified by the PP.

FMT_MOF.1 restricts the management function about FTP_ITC.1 and the management of User Authentication function only to U.ADMINISTRATOR and prevents from unauthorized execution of management function. This is not the change of content of security requirement specified by the PP.

The management of behavior of "HDD data overwrite deletion function" manages the

behavior of the overwrite deletion function to protect the residual information and this is not the change of content of security requirement specified by the PP.

The management of behavior of audit function manages the operation at the time of audit log full and this is not the change of content of security requirement specified by the PP.

Relation between FMT_MSA.1(a), FMT_MSA.1(b) and Objectives

The relationship between these functional requirements and objectives are different from PP, but this does not change the contents of security requirements specified by the PP. This is because disclosure and alteration of security attribute based on TSF data, such as attribute of user box, produces the same result with disclosure and alteration of TSF data itself and management of a security attribute has the same purpose and effect as protection of TSF data.

D.DOC in USB flash drive

The TOE assigns login user from operation panel as the owner of D.DOC in the concerned USB flash drive when USB flash drive is installed in the TOE, and performs access control. This will protect D.DOC against unauthorized disclosure and alteration and FDP_ACF.1(a) of this ST requires this access control SFP. Therefore, FDP_ACF.1(a) of this ST satisfies FDP_ACF.1(a) of the PP.

3 Security Problem Definition

3.1 Threats agents

This security problem definition addresses threats posed by four categories of threat agents:

- a) Persons who are not permitted to use the TOE who may attempt to use the TOE.
- b) Persons who are authorized to use the TOE who may attempt to use TOE functions for which they are not authorized.
- c) Persons who are authorized to use the TOE who may attempt to access data in ways for which they are not authorized.
- d) Persons who unintentionally cause a software malfunction that may expose the TOE to unanticipated threats.

The threats and policies defined in this Protection Profile address the threats posed by these threat agents.

3.2 Threats to TOE Assets

This section describes threats to assets described in clause in 1.4.6.

Threat	Affected asset	Description
T.DOC.DIS	D.DOC	User Document Data may be disclosed to unauthorized persons
T.DOC.ALT	D.DOC	User Document Data may be altered by unauthorized persons
T.FUNC.ALT	D.FUNC	User Function Data may be altered by unauthorized persons

Table 3-1 Threats to User Data for the TOE

Table 5-2 Threats to TSF Data for the TOE			
Threat	Affected asset	Description	
T.PROT.ALT	D.PROT	TSF Protected Data may be altered by unauthorized persons	
T.CONF.DIS	D.CONF	TSF Confidential Data may be disclosed to unauthorized persons	
T.CONF.ALT	D.CONF	TSF Confidential Data may be altered by unauthorized persons	

Table 3-2 Threats to TSF Data for the TOE

3.3 Organizational Security Policies for the TOE

This section describes the Organizational Security Policies (OSPs) that apply to the TOE. OSPs are used to provide a basis for Security Objectives that are commonly desired by TOE Owners in this operational environment but for which it is not practical to universally define the assets being protected or the threats to those assets.

Name	Definition
P.USER.AUTHORIZATION	To preserve operational accountability and security, Users will be
	authorized to use the TOE only as permitted by the TOE Owner.
P.SOFTWARE.VERIFICATION	To detect corruption of the executable code in the TSF, procedures will exist
	to self-verify executable code in the TSF.
P.AUDIT.LOGGING	To preserve operational accountability and security, records that provide an
	audit trail of TOE use and security-relevant events will be created,
	maintained, and protected from unauthorized disclosure or alteration, and
	will be reviewed by authorized personnel.
P.INTERFACE.MANAGEMENT	To prevent unauthorized use of the external interfaces of the TOE,
	operation of those interfaces will be controlled by the TOE and its IT
	environment.
P.HDD.CRYPTO	The Data stored in an HDD must be encrypted to improve the secrecy.

3.4 Assumptions

The Security Objectives and Security Functional Requirements defined in subsequent sections

of this Protection Profile are based on the condition that all of the assumptions described in this section are satisfied.

Assumptions	Definition
A.ACCESS.MANAGED	The TOE is located in a restricted or monitored environment that provides
	protection from unmanaged access to the physical components and data interfaces
	of the TOE.
A.USER.TRAINING	TOE Users are aware of the security policies and procedures of their organization
	and are trained and competent to follow those policies and procedures.
A.ADMIN.TRAINING	Administrators are aware of the security policies and procedures of their
	organization, are trained and competent to follow the manufacturer's guidance and
	documentation, and correctly configure and operate the TOE in accordance with
	those policies and procedures.
A.ADMIN.TRUST	Administrators do not use their privileged access rights for malicious purposes.

Table 3-4 Assumptions for the TOE

4 Security Objectives

4.1 Security Objectives for the TOE

This section describes the Security Objectives that the TOE shall fulfill.

Objective	Definition
Objective	Demittion
O.DOC.NO_DIS	The TOE shall protect User Document Data from unauthorized disclosure.
O.DOC.NO_ALT	The TOE shall protect User Document Data from unauthorized alteration.
O.FUNC.NO_ALT	The TOE shall protect User Function Data from unauthorized alteration.
O.PROT.NO_ALT	The TOE shall protect TSF Protected Data from unauthorized alteration.
O.CONF.NO_DIS	The TOE shall protect TSF Confidential Data from unauthorized disclosure.
O.CONF.NO_ALT	The TOE shall protect TSF Confidential Data from unauthorized alteration.
O.USER.AUTHORIZED	The TOE shall require identification and authentication of Users and shall
	ensure that Users are authorized in accordance with security policies before
	allowing them to use the TOE.
O.INTERFACE.MANAGED	The TOE shall manage the operation of external interfaces in accordance with
	security policies.
O.SOFTWARE.VERIFIED	The TOE shall provide procedures to self-verify executable code in the TSF.
O.AUDIT.LOGGED	The TOE shall create and maintain a log of TOE use and security-relevant
	events and prevent its unauthorized disclosure or alteration.
O.HDD.CRYPTO	The TOE shall encrypt data at the time of storing it to an HDD.

Table 4-1 Security Objectives for the TOE

4.2 Security Objectives for the IT environment

This section describes the Security Objectives that must be fulfilled by IT methods in the IT environment of the TOE.

Objective	Definition
OE.AUDIT_STORAGE.PROTECTED	If audit records are exported from the TOE to another trusted IT
	product, the TOE Owner shall ensure that those records are protected
	from unauthorized access, deletion and modifications.
OE.AUDIT_ACCESS.AUTHORIZED	If audit records generated by the TOE are exported from the TOE to
	another trusted IT product, the TOE Owner shall ensure that those
	records can be accessed in order to detect potential security violations,
	and only by authorized persons.
OE.INTERFACE.MANAGED	The IT environment shall provide protection from unmanaged access to
	TOE external interfaces.

Table 4-2 Security Objectives for the IT environment

4.3 Security Objectives for the non-IT environment

This section describes the Security Objectives that must be fulfilled by non-IT methods in the non-IT environment of the TOE.

Objective	Definition
OE.PHYSICAL.MANAGED	The TOE shall be placed in a secure or monitored area that provides
	protection from unmanaged physical access to the TOE.
OE.USER.AUTHORIZED	The TOE Owner shall grant permission to Users to be authorized to
	use the TOE according to the security policies and procedures of their
	organization.
OE.USER.TRAINED	The TOE Owner shall ensure that Users are aware of the security
	policies and procedures of their organization and have the training and
	competence to follow those policies and procedures.
OE.ADMIN.TRAINED	The TOE Owner shall ensure that TOE Administrators are aware of
	the security policies and procedures of their organization; have the
	training, competence, and time to follow the manufacturer's guidance
	and documentation; and correctly configure and operate the TOE in
	accordance with those policies and procedures.
OE.ADMIN.TRUSTED	The TOE Owner shall establish trust that TOE Administrators will not
	use their privileged access rights for malicious purposes.
OE.AUDIT.REVIEWED	The TOE Owner shall ensure that audit logs are reviewed at
	appropriate intervals for security violations or unusual patterns of
	activity.

Table 4-3 Security Objectives for the non-IT environment

4.4 Security Objectives rationale

This section demonstrates that each threat, organizational security policy, and assumption are mitigated by at least one security objective for the TOE, and that those Security Objectives counter the threats, enforce the policies, and uphold the assumptions.

										Obj	ective	es								
Threats, policies, And assumptions	O.DOC.NO_DIS	O.DOC.NO_ALT	O.FUNC.NO_ALT	O.PROT.NO_ALT	O.CONF.NO_DIS	O.CONF.NO_ALT	O.USER.AUTHORIZED	OE.USER.AUTHORIZED	O.SOFTWARE.VERIFIED	O.AUDIT.LOGGED	O.HDD.CRYPTO	OE.AUDIT_STORAGE.PROTECTED	OE.AUDIT_ACCESS.AUTHORIZED	OE.AUDIT.REVIEWED	O.INTERFACE.MANAGED	OE.PHYISCAL.MANAGED	OE.INTERFACE.MANAGED	OE.ADMIN.TRAINED	OE.ADMIN.TRUSTED	OE.USER.TRAINED
T.DOC.DIS	Х						Х	Х												
T.DOC.ALT		Х					Х	Х												
T.FUNC.ALT			Х				Х	Х												
T.PROT.ALT				Х			Х	Х												
T.CONF.DIS					Х		Х	Х												
T.CONF.ALT						Х	Х	Х												
P.USER.AUTHORIZATION							Х	Х												
P.SOFTWARE.VERIFICATION									Х											
P.AUDIT.LOGGING										Х		Х	Х	Х						
P.INTERFACE.MANAGEMENT															Х		Х			
P.HDD.CRYPTO											Х									
A.ACCESS.MANAGED																Х				
A.ADMIN.TRAINING																		Х		
A.ADMIN.TRUST																			Х	
A.USER.TRAINING																				Х

Table 4-4 Completeness of Security Objectives

	Table 4-5 Sufficiency o	
Threats. Policies,	Summary	Objectives and rationale
and assumptions		
T.DOC.DIS	User Document Data	O.DOC.NO_DIS protects D.DOC from unauthorized
	may be disclosed to	disclosure.
	unauthorized persons.	O.USER.AUTHORIZED establishes user
		identification and authentication as the basis for
		authorization.
		OE.USER.AUTHORIZED establishes responsibility
		of the TOE Owner to appropriately grant
		authorization.
T.DOC.ALT	User Document Data	O.DOC.NO_ALT protects D.DOC from unauthorized
	may be altered by	alteration.
	unauthorized persons.	O.USER.AUTHORIZED establishes user
		identification and authentication as the basis for
		authorization.
		OE.USER.AUTHORIZED establishes responsibility
		of the TOE Owner to appropriately grant
		authorization.
T.FUNC.ALT	User Function Data may	O.FUNC.NO_ALT protects D.FUNC from
	be altered by	unauthorized alteration.
	unauthorized persons.	O.USER.AUTHORIZED establishes user
		identification and authentication as the basis for
		authorization.
		OE.USER.AUTHORIZED establishes responsibility
		of the TOE Owner to appropriately grant
		authorization.
T.PROT.ALT	TSF Protected Data may	O.PROT.NO_ALT protects D.PROT from
	be altered by	unauthorized alteration.
	unauthorized persons.	O.USER.AUTHORIZED establishes user
		identification and authentication as the basis for
		authorization.
		OE.USER.AUTHORIZED establishes responsibility
		of the TOE Owner to appropriately grant
		authorization.
T.CONF.DIS	TSF Confidential Data	O.CONF.NO_DIS protects D.CONF from
	may be disclosed to	unauthorized disclosure.
	unauthorized persons.	O.USER.AUTHORIZED establishes user
		identification and authentication as the basis for
		authorization.
		OE.USER.AUTHORIZED establishes responsibility
		of the TOE Owner to appropriately grant
		authorization
T.CONF.ALT	TSF Confidential Data	O.CONF.NO_ALT protects D.CONF from
	may be altered by	unauthorized alteration.
	may be attered by	מוממחסרוצכע מוזכרמנוסוו.

Table 4-5 Sufficiency of Security Objectives

P.USER.AUTHORIZATION	unauthorized persons. Users will be authorized to use the TOE	 O.USER.AUTHORIZED establishes user identification and authentication as the basis for authorization. OE.USER.AUTHORIZED establishes responsibility of the TOE Owner to appropriately grant authorization O.USER.AUTHORIZED establishes user identification and authentication as the basis for authorization to use the TOE. OE.USER.AUTHORIZED establishes responsibility of the TOE Owner to appropriately grant authorization
P.SOFTWARE.VERIFICATION	Procedures will exist to self- verify executable code in the TSF.	O.SOFTWARE.VERIFIED provides procedures to self-verify executable code in the TSF.
P.AUDIT.LOGGING	An audit trail of TOE use and security-relevant events will be created, maintained, protected, and reviewed.	O.AUDIT.LOGGED creates and maintains a log of TOE use and security-relevant events and prevents unauthorized disclosure or alteration. OE.AUDIT_STORAGE.PROTECTED protects exported audit records from unauthorized access, deletion, and modifications. OE.AUDIT_ACCESS.AUTHORIZED establishes responsibility of, the TOE Owner to provide appropriate access to exported audit records. OE.AUDIT.REVIEWED establishes responsibility of the TOE Owner to ensure that audit logs are appropriately reviewed.
P.INTERFACE.MANAGEMENT	Operation of external interfaces will be controlled by the TOE and its IT environment.	O.INTERFACE.MANAGED manages the operation of external interfaces in accordance with security policies. OE.INTERFACE.MANAGED establishes a protected environment for TOE external interfaces.
P.HDD.CRYPTO	Cryptographic operation will be controlled by the TOE.	O.HDD.CRYPTO encrypts data stored in HDD by the TOE.
A.ACCESS.MANAGED	The TOE environment provides protection from unmanaged access to the physical components and data interfaces of the TOE.	OE.PHYSICAL.MANAGED establishes a protected physical environment for the TOE.
A.ADMIN.TRAINING A.ADMIN.TRUST	TOE Users are aware of and trained to follow security policies and procedures. Administrators do not	OE.ADMIN.TRAINED establishes responsibility of the TOE Owner to provide appropriate Administrator training. OE.ADMIN.TRUST establishes responsibility of the

	use their privileged	TOE Owner to have a trusted relationship with
	access rights for	Administrators.
	malicious purposes.	
A.USER.TRAINING	Administrators are	OE.USER.TRAINED establishes responsibility of
	aware of and trained to	the TOE Owner to provide appropriate User
	follow security policies	training.
	and procedures.	

5 Extended components definition (APE_ECD)

This Protection Profile defines components that are extensions to Common Criteria 3.1 Revision 2, Part 2. These extended components are defined in the Protection Profile but are used in SFR Packages and, therefore, are employed only in TOEs whose STs conform to those SFR Packages.

5.1 FPT_FDI_EXP Restricted forwarding of data to external interfaces

Family behaviour:

This family defines requirements for the TSF to restrict direct forwarding of information from one external interface to another external interface.

Many products receive information on specific external interfaces and are intended to transform and process this information before it is transmitted on another external interface. However, some products may provide the capability for attackers to misuse external interfaces to violate the security of the TOE or devices that are connected to the TOE's external interfaces. Therefore, direct forwarding of unprocessed data between different external interfaces is forbidden unless explicitly allowed by an authorized administrative role. The family FPT_FDI_EXP has been defined to specify this kind of functionality.

Component leveling:

FPT FDI EXP.1	Restricted forwarding of data to external interfaces		1
---------------	--	--	---

FPT_FDI_EXP.1 Restricted forwarding of data to external interfaces provides for the functionality to require TSF controlled processing of data received over defined external interfaces before these data are sent out on another external interface. Direct forwarding of data from one external interface to another one requires explicit allowance by an authorized administrative role.

Management: FPT_FDI_EXP.1

The following actions could be considered for the management functions in FMT: Definition of the role(s) that are allowed to perform the management activities Management of the conditions under which direct forwarding can be allowed by an

administrative role

Revocation of such an allowance

Audit: FPT_FDI_EXP.1

The following actions should be auditable if FAU_GEN Security Audit Data Generation is included in the PP/ST:

There are no auditable events foreseen.

Rationale:

Quite often, a TOE is supposed to perform specific checks and process data received on one external interface before such (processed) data are allowed to be transferred to another external interface. Examples are firewall systems but also other systems that require a specific work flow for the incoming data before it can be transferred. Direct forwarding of such data (i.e., without processing the data first) between different external interfaces is therefore a function that—if allowed at all—can only be allowed by an authorized role.

It has been viewed as useful to have this functionality as a single component that allows specifying the property to disallow direct forwarding and require that only an authorized role can allow this. Since this is a function that is quite common for a number of products, it has been viewed as useful to define an extended component.

The Common Criteria defines attribute-based control of user data flow in its FDP class. However, in this Protection Profile, the authors needed to express the control of both user data and TSF data flow using administrative control instead of attribute-based control. It was found that using FDP_IFF and FDP_IFC for this purpose resulted in SFRs that were either too implementation-specific for a Protection Profile or too unwieldy for refinement in a Security Target. Therefore, the authors decided to define an extended component to address this functionality.

This extended component protects both user data and TSF data, and it could therefore be placed in either the FDP or the FPT class. Since its purpose is to protect the TOE from misuse, the authors believed that it was most appropriate to place it in the FPT class. It did not fit well in any of the existing families in either class, and this led the authors to define a new family with just one member.

FPT_FDI_EXP.1	Restricted forwarding of data to external interfaces					
	Hierarchical to: No other components					
	Dependencies: FMT_SMF.1 Specification of Management Functions					
	FMT_SMR.1 Security roles					
FPT_FDI_EXP.1.1	The TSF shall provide the capability to restrict data received					

FPT_FDI_EXP.1.1 The TSF shall provide the capability to restrict data received on [assignment: *list of external interfaces*] from being forwarded without further processing by the TSF to [assignment: *list of external interfaces*].

6 Security Requirements

In this chapter, the security requirements are described.

6.1 Security functional requirements

In this chapter, the TOE security functional requirements for achieving the security objectives specified in Chapter 4.1 are described. This is quoted from the security functional requirements specified in the CC Part 2. The security functional requirements which are not specified in the CC Part 2 are quoted from the extended security functional requirements specified in the PP (IEEE Std 2600.1^{TM-}2009).

< Method of specifying security functional requirement "Operation" >

In the following description, when items are **indicated** in "bold," it means that they are completed or refined. When items are **indicated** in *"italic"* and "bold," it means that they are assigned or selected. When items are **indicated** in *"italic"* and "bold" with parenthesis right after the underlined original sentences, it means that the underlined sentences are refined. A number in the parentheses after a label means that the functional requirement is used repeatedly.

6.1.1 Class FAU: Security audit

FAU_GEN.1	Audit data generation						
	Hierarchical to : No other components						
	Dependencies : FPT_STM.1 Reliable time stamps						
FAU_GEN.1.1	The TSF shall be able to generate an audit record of the following auditable events:						
	- Start-up and shutdown of the audit functions; and						
	- All auditable events for the [selection, choose one of: <i>minimum, basic, detailed, not</i>						
	specified] level of audit; and						
	\cdot All Auditable Events as each is defined for its Audit Level (if one is specified) for the						
	Relevant SFR in Table 6-1; [assignment: other specifically defined auditable events]						
	[selection, choose one of: <i>minimum, basic, detailed, not specified</i>]						
	not specified						
	[assignment: other specifically defined auditable events]						
	None						
FAU_GEN.1.2	The TSF shall record within each audit record at least the following information:						
	- Date and time of the event, type of event, subject identity (if applicable), and the						
	outcome (success or failure) of the event; and						
	- For each audit event type, based on the auditable event definitions of the functional						
	components included in the PP/ST, for each Relevant SFR listed in Table 6-1: (1)						
	information as defined by its Audit Level (if one is specified), and (2) all Additional						
	Information (if any is required); [assignment: other audit relevant information]						
	[assignment: other audit relevant information]						

None

Auditable event	Table 6-1 Audit data requirements nt Relevant SFR Audit level Additional De			Details
			information	
Job completion	FDP_ACF.1	Not specified	Type of job	-Success of Print
			-, po or job	-Success of Scan
				-Success of Copy
				-Success of Sending FAX
				-Success of Receiving FAX
				-Success of Storing document data
				-Success of Reading / Deletion /
				Modify of document data
Both successful	FIA_UAU.1	Basic	None required	-Failure of login
and unsuccessful				-Success of login
use of the				
authentication				
mechanism				
The reaching of	FIA_AFL.1	Minimum	None required	-Suspension of authentication
the threshold for				-Recovery to normal state
the unsuccessful				
authentication				
attempts and the				
actions (e.g.				
disabling of a				
terminal) taken				
and the				
subsequent, if				
appropriate,				
restoration to the				
normal state (e.g.				
re-enabling of a				
terminal).				
Both successful	FIA_UID.1	Basic	Attempted user	-Success of login
and unsuccessful			identity, if	-Failure of login
use of the			available	
identification				
mechanism				
Use of the	FMT_SMF.1	Minimum	None required	Use of the management functions
management				
functions				
Modifications to	FMT_SMR.1	Minimum	None required	No record because no group of users
the group of				as a role does not exist.
users that are				
part of a role				
Failure of the	FTP_ITC.1	Minimum	None required	Failure of the trusted channel

Table 6-1 Audit data requirements

trusted channel				functions
functions				
Changes to the	FPT_STM.1	Minimum	None required	changes to the time
time				
Locking of an	FTA_SSL.3	Minimum	None required	Termination of an interactive
interactive				session by the session locking
session by the				mechanism.
session locking				
mechanism				

FAU_GEN.2	User identity association
	Hierarchical to : No other components
	Dependencies : FAU_GEN.1 Audit data generation
	FIA_UID.1 Timing of identification
FAU_GEN.2.1	For audit events resulting from actions of identified users, the TSF shall be able to
	associate each auditable event with the identity of the user that caused the event.
FAU_SAR.1	Audit review
	Hierarchical to : No other components
	Dependencies : FAU_GEN.1 Audit data generation
FAU_SAR.1.1	The TSF shall provide [assignment: <i>authorised users</i>] with the capability to read
	[assignment: <i>list of audit information</i>] from the audit records.
	[assignment: authorised users]
	U.ADMINISTRATOR
	[assignment: <i>list of audit information</i>]
	Audit log indicated in Table 6-1
FAU_SAR.1.2	The TSF shall provide the audit records in a manner suitable for the user to interpret the
	information.
FAU_SAR.2	Restricted audit review
	Hierarchical to : No other components
	Dependencies : FAU_SAR.1 Audit review
FAU_SAR.2.1	The TSF shall prohibit all users read access to the audit records, except those users that
	have been granted explicit read-access.
FALL ODO 1	
FAU_STG.1	Protected audit trail storage
	Hierarchical to : No other components
	Dependencies : FAU_GEN.1 Audit data generation
FAU_STG.1.1	The TSF shall protect the stored audit records in the audit trail from unauthorized
FAU_STG.1.2	deletion. The TSF shall be able to [selection, choose one of: <i>prevent, detect</i>] unauthorised

modifications to the stored audit records in the audit trail.
[selection, choose one of: prevent, detect]
prevent

FAU_STG.4(1)	Prevention of audit data loss
--------------	-------------------------------

Hierarchical to:FAU_STG.3 Action in case of possible audit data lossDependencies:FAU_STG.1 Protected audit trail storageFAU_STG.4.1The TSF shall [selection, choose one of: "ignore audited events", "prevent audited events,
except those taken by the authorised user with special rights", "overwrite the oldest
stored audit records"] and [assignment: other actions to be taken in case of audit storage
failure] if the audit trail is full (if the audit trail is full, in the state where operation
when the audit trail was full was set as "overwrite prohibition").[selection, choose one of: "ignore audited events", "prevent audited events, except those
taken by the authorised user with special rights", "overwrite the oldest stored audit
records"]

ignore audited events

[assignment: other actions to be taken in case of audit storage failure] Suspend acceptance of jobs

FAU_STG.4(2)	Prevention of audit data loss						
	Hierarchical to : FAU_STG.3 Action in case of possible audit data loss						
	Dependencies : FAU_GEN.1 Audit data generation						
FAU_STG.4.1	The TSF shall [selection, choose one of: "ignore audited events", "prevent audited events,						
	except those taken by the authorised user with special rights", "overwrite the oldest						
	stored audit records'] and [assignment: other actions to be taken in case of audit storage						
	failure] if the audit trail is full (if the audit trail is full, in the state where operation						
	when the audit trail was full was set as "overwrite permission").						
	[selection, choose one of: "ignore audited events", "prevent audited events, except those						
	taken by the authorised user with special rights", "overwrite the oldest stored audit						
	records']						
	overwrite the oldest stored audit records						
	[assignment: other actions to be taken in case of audit storage failure]						
	None						

6.1.2 Class FCS: Cryptographic support

FCS_CKM.1	Cryptographic key generation			
	Hierarchical to	:	No other components.	
	Dependencies	:	[FCS_CKM.2 Cryptographic key distribution, or	
			FCS_COP.1 Cryptographic operation]	
			FCS_CKM.4 Cryptographic key destruction	
FCS_CKM.1.1	The TSF shall generate cryptographic keys (cryptographic keys for HDD encryption) in			

accordance with a specified cryptographic key generation algorithm [assignment: cryptographic key generation algorithm] and specified cryptographic key sizes [assignment: cryptographic key sizes] that meet the following: [assignment: list of standards]. [assignment: cryptographic key generation algorithm] *refer to Table 6-2* [assignment: cryptographic key sizes] *refer to Table 6-2* [assignment: list of standards] *refer to Table 6-2*

Table 6-2 Cryptographic key algorithm key size

list of standards	cryptographic key generation algorithm	key sizes
Konica Minolta Encryption	Konica Minolta HDD Encryption Key Generation	-256 bit
specification standard	Algorithm	

FCS_COP.1	Cryptographic operation					
	Hierarchical to : No other components					
	Dependencies : [FDP_ITC.1 Import of user data without security attributes, or					
	FDP_ITC.2 Import of user data with security attributes, or					
	FCS_CKM.1 Cryptographic key generation]					
	FCS_CKM.4 Cryptographic key destruction					
FCS_COP.1.1	The TSF shall perform [assignment: list of cryptographic operations] in accordance with					
	a specified cryptographic algorithm [assignment: cryptographic algorithm] and					
	cryptographic key sizes [assignment: cryptographic key sizes] that meet the following:					
	[assignment: list of standards].					
	[assignment: list of cryptographic operations]					
	refer to Table 6-3					
	[assignment: cryptographic algorithm]					
	refer to Table 6-3					
	[assignment: cryptographic key sizes]					
	refer to Table 6-3					
	[assignment: list of standards]					
	refer to Table 6-3					

Table 6-3 Cryptographic operations algorithm key size standards

Standard	cryptographic algorithm	key sizes	cryptographic operations
FIPS PUB197	AES	-256 bit	Encrypt HDD

6.1.3 Class FDP: User data protection

FDP_ACC.1(a)	Subset access control				
	Hierarchical to : No other components				
	Dependencies : FDP_ACF.1 Security attribute based access control				
FDP_ACC.1.1(a)	The TSF shall enforce the <u>Common Access Control SFP in Table 17</u> (Access Control SFP				
	in Table 6-4, Table 6-5, Table 6-6, Table 6-7, Table 6-8, Table 6-9) on the list of users as				
	subjects, objects, and operations among subjects and objects covered by the Common				
	Access Control SFP in Table 17 (the list of users as subjects, objects, and operations				
	among subjects and objects covered by the Access Control SFP in Table 6-4, Table				
	6-5, Table 6-6, Table 6-7, Table 6-8, Table 6-9).				

Object	Attribute		Operation(s)	Subject	Subject	Access control
	Function	Object			Attribute	rule
	Attribute	Attribute				
D.DOC	+PRT	User ID	Delete	U.NORMAL	User ID	Operation is
	+SCN					permitted, only
	+CPY					when User ID
	+FAXOUT					matches.
D.FUNC	+PRT	User ID	Modify	U.NORMAL	User ID	Operation is
	+CPY		Delete			permitted, only
	+SCN					when User ID
	+DSR					matches.
	+FAXIN					
	+FAXOUT					

Table 6-4 Common Access Control SFP

Table 6-5 PRT Access Control SFP

Object	Att	ribute	Operation(s)	Subject	Subject	Access control rule
	Function Attribute	Object Attribute			Attribute	
D.DOC	+PRT	User ID	Read	U.NORMAL	User ID	Operation is permitted only to the one whose user ID matches.

Table 6-6 SCN Access Control SFP

Object	Attribute		Operation(s)	Subject	Subject	Access control rule
	Function	Object			Attribute	
	Attribute	Attribute				
D.DOC	+SCN	User ID	Read	U.NORMAL	User ID	Operation is
			Modify			permitted only to the
						one whose user ID
						matches.

Object	Attribute		Operation(s)	Subject	Subject	Access control rule
	Function	Object			Attribute	
	Attribute	Attribute				
D.DOC	+CPY	User ID	Read	U.NORMAL	User ID	Operation is permitted only to the one whose user ID
						matches.

Table 6-7 CPY Access Control SFP

Table 6-8 FAX Access Control SFP

Object		Attribute	Operation(s)	Subject	Subject	Access control rule
	Function	Object			Attribute	
	Attribute	Attribute				
D.DOC	+ FAXIN	Box Type	Delete	U.NORMAL	User ID	Operation is
		Box User ID	Read			permitted only to the
			Modify			user who has Box
						User ID which
						matches to User ID,
						when Box Type is
						personal user box.
		Box Type			Group ID	Operation is
		Box Group ID				permitted only to the
						user who has Box
						Group ID which
						matches to Group ID,
						when Box Type is
						group user box.
		Box Type			BOX PASSWORD	Operation is denied if
		BOX PASSWORD				BOX PASSWORD
						does not match when
						Box Type is Memory
						RX user box or public
						user box.
	+FAXOUT	User ID	Read	U.NORMAL	User ID	Operation is
			Modify			permitted only to the
						one whose user ID
						matches.

* When Function Attribute is "+ FAXIN," it is specified by referring to Box Type since any of Box User ID, Box Group ID or BOX PASSWORD is added in corresponding to Box Type.

Object	A	Attribute	Operation(s)	Subject	Subject	Access control rule
-	Function	Object	-		Attribute	
	Attribute	Attribute				
D.DOC	+DSR	Box Type	Delete	U.NORMAL	User ID	Operation is
		Box User ID	Read			permitted only to
			Modify			the user who has
			Create			Box User ID which
						matches to User ID,
						when Box Type is
						personal user box.
		Box Type			Group ID	Operation is
		Box Group ID				permitted only to
						the user who has
						Box Group ID which
						matches to Group
						ID, when Box Type
						is group user box.
		Box Type			BOX PASSWORD	Operation is denied
		BOX PASSWORD				if BOX PASSWORD
						does not match
						when Box Type is
						either of public user
						or annotation user
						box.
		Box Type	Delete		DOC PASSWORD	Operation is denied
		DOC PASSWORD	Read			if DOC PASSWORD
			Modify			does not match
						when Box Type is
						Secure print user
						box.
		Box Type	Delete		User ID	Operation is
		User ID	Read			permitted only to a
						user who has User
						ID which matches
						to User ID of Object,
						when Box Type is
						Password encrypted
						PDF user box.

Table 6-9 DSR Access Control SFP

* Since any of Box User ID, Box Group ID, BOX PASSWORD, DOC PASSWORD or User ID is given in accordance with the Box Type, it can be specified by referring to the Box Type.

FDP_ACC.1(b) Subset access control Hierarchical to : No other components Dependencies : FDP_ACF.1 Security attribute based access control FDP_ACC.1.1(b) The TSF shall enforce the TOE Function Access Control SFP (TOE Function Access Control SFP in Table 6-10) on users as subjects, TOE functions as objects, and the right to use the functions as operations (the list of users as subjects, objects, and operations among subjects and objects covered by the TOE Function Access Control SFP in Table 6-10).

Object	Object	Operation(s)	Subject	Subject Attribute	Access control rule
(TOE Function)	Attribute				
F.PRT	Permission	Execution	U.NORMAL	Allocation Role	Execution of the
	Role				function is permitted,
					when Allocation Role
					that is a Subject
					includes Permission
					Role that is an Object.
F.SCN	Permission	Execution	U.NORMAL	Allocation Role	Execution of the
	Role				function is permitted,
					when Allocation Role
					that is a Subject
					includes Permission
					Role that is an Object.
F.CPY	Permission	Execution	U.NORMAL	Allocation Role	Execution of the
	Role				function is permitted,
					when Allocation Role
					that is a Subject
					includes Permission
					Role that is an Object.
F.FAX	Permission	Execution	U.NORMAL	Allocation Role	Execution of the
	Role				function is permitted,
					when Allocation Role
					that is a Subject
					includes Permission
					Role that is an Object.
F.DSR	Permission	Execution	U.NORMAL	Allocation Role	Execution of the
	Role				function is permitted,
					when Allocation Role
					that is a Subject
					includes Permission
					Role that is an Object.

Table 6-10 TOE Function Access Control SFP

FDP_ACF.1(a)	Security attribute based access control
:	Hierarchical to : No other components
	Dependencies : FDP_ACC.1 Subset access control
	FMT_MSA.3 Static attribute initialisation
FDP_ACF.1.1(a)	The TSF shall enforce the Common Access Control SFP in Table 17 (Access Control SFP
	in Table 6-4, Table 6-5, Table 6-6, Table 6-7, Table 6-8, Table 6-9) to objects based on the
	following: the list of users as subjects and objects controlled under the Common Access
	Control SFP in Table 17, and for each, the indicated security attributes in Table 17 (the
	list of users as subjects and objects controlled under the Access Control SFP in Table 6-4,
	Table 6-5, Table 6-6, Table 6-7, Table 6-8, Table 6-9 and for each, the indicated security
	attributes in Table 6-4, Table 6-5, Table 6-6, Table 6-7, Table 6-8, Table 6-9).
FDP_ACF.1.2(a)	The TSF shall enforce the following rules to determine if an operation among controlled
	subjects and controlled objects is allowed: <u>rules specified in the Common Access Control</u>
	SFP in Table 17 governing access among controlled users as subjects and controlled
	objects using controlled operations on controlled objects (rules specified in the Document
	Access Control SFP in Table 6-4, Table 6-5, Table 6-6, Table 6-7, Table 6-8, Table 6-9
	governing access among controlled users as subjects and controlled objects using
	controlled operations on controlled objects).
FDP_ACF.1.3(a)	The TSF shall explicitly authorize access of subjects to objects based on the following
	additional rules: [assignment: rules, based on security attributes, that explicitly
	authorize access of subjects to objects].
	[assignment: rules, based on security attributes, that explicitly authorize access of
	subjects to objects]
	- U.ADMINISTRATOR can delete all D.DOC and D.FUNC.
	- U.ADMINISTRATOR can Delete all D.DOC and D.FUNC which have +DSR attribute.
	- Anybody can Delete by cancelling FAX communication during
	receiving all D_DOC and D_FUNC which have +FAXIN attribute.
	· If Box Type is USB, a user who logs in from the operation panel can
	Read D.DOC in the user Box by operating the operation panel.
FDP_ACF.1.4(a)	The TSF shall explicitly deny access of subjects to objects based on the [assignment:
	rules, based on security attributes, that explicitly deny access of subjects to objects].
	[assignment: rules, based on security attributes, that explicitly deny access of subjects to
	objects].
	- The access to the user box is prohibited when number of continuous mismatch of BOX
	PASSWORD reached the administrator configurable positive integer within 1-3.
	• The access to the secure print is prohibited when number of continuous mismatch of
	DOC PASSWORD reached the administrator configurable positive integer within 1-3.
	- If Box Type is USB, access to D.DOC in the user Box from other than
	the operation panel is denied.
FDP_ACF.1(b)	Security attribute based access control
	Hierarchical to : No other components

bizhub 754e/bizhub 654e/ ineo 754e/ineo 654e Security Target

	Dependencies : FDP_ACC.1 Subset access control
	FMT_MSA.3 Static attribute initialisation
FDP_ACF.1.1(b)	The TSF shall enforce the <u>TOE Function Access Control SFP</u> (<i>TOE Function Access</i>
	Control SFP in Table 6-10) to objects based on the following: users and [assignment: list
	of TOE functions and the security attribute(s) used to determine the TOE Function
	Access Control SFP].
	[assignment: list of TOE functions and the security attribute(s) used to determine the
	TOE Function Access Control SFP]
	the list of users as subjects and objects controlled under the TOE Function Access
	Control SFP in Table 6-10, and for each, the indicated security attributes in Table 6-10
FDP_ACF.1.2(b)	The TSF shall enforce the following rules to determine if an operation among controlled
	subjects and controlled objects is allowed: [selection: <i>the user is explicitly authorized by</i>
	U.ADMINISTRATOR to use a function, a user that is authorized to use the TOE is
	automatically authorized to use the functions [assignment: list of functions],
	[assignment: other conditions]].
	[selection: the user is explicitly authorized by U.ADMINISTRATOR to use a function, a
	user that is authorized to use the TOE is automatically authorized to use the functions
	[assignment: list of functions], [assignment: other conditions]]
	[assignment: other conditions]
	Table 6-10
EDD ACE $1.9(h)$	
FDP_ACF.1.3(b)	The TSF shall explicitly authorise access of subjects to objects based on the following
	additional rules: the user acts in the role U.ADMINISTRATOR: [assignment: other
	rules, based on security attributes, that explicitly authorise access of subjects to objects].
	[assignment: other rules, based on security attributes, that explicitly authorise access of
	subjects to objects].
	None
FDP_ACF.1.4(b)	The TSF shall explicitly deny access of subjects to objects based on the [assignment:
	rules based on security attributes that explicitly deny access of subjects to objects].
	The TSF shall explicitly deny access of subjects to objects based on the [assignment:
	rules based on security attributes that explicitly deny access of subjects to objects].
	None
FDP_RIP.1	Subset residual information protection
	Hierarchical to : No other components
	Dependencies : No dependencies
FDP_RIP.1.1	The TSF shall ensure that any previous information content of a resource is made
	unavailable upon the [selection: allocation of the resource to, deallocation of the
	resource from] the following objects: D.DOC, [assignment: list of objects].
	[selection: allocation of the resource to, deallocation of the resource from]
	deallocation of the resource from
	[assignment: <i>list of objects</i>].
	None

6.1.4 Class FIA: Identification and authentication

FIA_AFL.1	Authentication failure handling				
	Hierarchical to : No other components				
	Dependencies : FIA_UAU.1 Timing of authentication				
FIA_AFL.1.1	The TSF shall detect when [selection: [assignment: positive integer number], an				
	administrator configurable positive integer within[assignment: range of acceptable				
	values] unsuccessful authentication attempts occur related to [assignment: list of				
	authentication events].				
	[selection: [assignment: positive integer number], an administrator configurable positive				
	integer within[assignment; range of acceptable values]]				
	an administrator configurable positive integer within[assignment: range of acceptable				
	values]				
	[assignment: range of acceptable values]				
	1~3				
	[assignment: <i>list of authentication events</i>]				
	Authentication of login password				
FIA_AFL.1.2	When the defined number of unsuccessful authentication attempts has been [selection:				
	<i>met, surpassed</i>], the TSF shall [assignment: <i>list of actions</i>].				
	[selection: <i>met, surpassed</i>]				
	met, surpassed				
	[assignment: <i>list of actions</i>]				
	Suspend authentication by login password				
	<operation condition="" for="" normal="" recovering="" the=""></operation>				
	Administrator Authentication: Perform the boot process of the TOE. (Release process is				
	performed after time set in the release time setting of operation				
	prohibition for Administrator authentication passed by the boot process.)				
	<i>Other: Execute the delete function of authentication failure frequency by administrator.</i>				
FIA_ATD.1	User attribute definition				
	Hierarchical to : No other components				
	Dependencies : No dependencies				
FIA_ATD.1.1	The TSF shall maintain the following list of security attributes belonging to individual				
	users: [assignment: <i>list of security attributes</i>].				
	[assignment: <i>list of security attributes</i>].				
	User ID				
	Group ID				
	Allocation Role				
	Role				
FIA_SOS.1(1)	Verification of secrets				
	Hierarchical to : No other components				

Hierarchical to	·	No other componen
Dependencies	:	No dependencies

FIA_SOS.1.1(1)	The TSF shall provide a mechanism to verify that secrets (Login password, account
	password, user box password, and secure print password) meet [assignment: a defined
	quality metric].
	[assignment: a defined quality metric]
	-Number of characters : 8 or more characters
	-Character type : possible to choose from 94 or more characters
	-Rule : (1) Do not compose by only one and the same character.
	(2) Do not set the same password as the current setting after change.
FIA_SOS.1(2)	Verification of secrets
	Hierarchical to : No other components
	Dependencies : No dependencies
FIA_SOS.1.1(2)	The TSF shall provide a mechanism to verify that <u>secrets</u> (Encryption passphrase) meet
	[assignment: a defined quality metric].

[assignment: a defined quality metric]

-Number of characters ÷ 20 characters

-Character type 🔅 possible to choose from 83 or more characters

- -Rule : (1)Do not compose by only one and the same character
 - (2)Do not the same password as the current setting after change

FIA_UAU.1	Timing of authentication					
	Hierarchical to : No other components					
	Dependencies : FIA_UID.1 Timing of identification					
FIA_UAU.1.1	The TSF shall allow [assignment: list of TSF-mediated actions that do not conflict with					
	access-controlled Functions of the TOE] on behalf of the user to be performed before the					
	user is authenticated.					
	[assignment: list of TSF-mediated actions that do not conflict with access-controlled					
	Functions of the TOE					
	Confirm the suspended state of user's use in MFP authentication					
	Confirm the suspended state of the account in MFP authentication					
	Receive Fax					
	Set the TOE status confirmation and display, etc.					
FIA_UAU.1.2	The TSF shall require each user to be successfully authenticated before allowing any					
	other TSF-mediated actions on behalf of that user.					
FIA_UAU.6	Re-authenticating					
1 11_0110.0						
ELA LIALLO 1	Dependencies : No dependencies					
FIA_UAU.6.1	The TSF shall re-authenticate the user under the conditions [assignment: <i>list of</i>					
	conditions under which re-authentication is required].					
	[assignment: list of conditions under which re-authentication is required]					
	Change of user's own login password.					

FIA_UAU.7	Protected authentication feedback					
	Hierarchical to : No other components					
	Dependencies : FIA_UAU.1 Timing of authentication					
FIA_UAU.7.1	The TSF shall provide only [assignment: <i>list of feedback</i>] to the user while the					
	authentication is in progress.					
	[assignment: <i>list of feedback</i>]					
	Display "*" every character data input.					
FIA_UID.1	Timing of identification					
	Hierarchical to : No other components					
	Dependencies : No dependencies					
FIA_UID.1.1	The TSF shall allow [assignment: list of TSF-mediated actions that do not conflict with					
	<i>access controlled Functions of the TOE</i>] on behalf of the user to be performed before the user is identified.					
	[assignment: list of TSF-mediated actions that do not conflict with access-controlled					
	Functions of the TOE					
	Confirm the suspended state of user's use in MFP authentication					
	Confirm the suspended state of the account in MFP authentication					
	Receive RX					
	Set the TOE status confirmation and display, etc.					
FIA_UID.1.2	The TSF shall require each user to be successfully identified before allowing any other					
	TSF-mediated actions on behalf of that user.					
FIA_USB.1	User-subject binding					
	Hierarchical to : No other components					
	Dependencies : FIA_ATD.1 User attribute definition					
FIA_USB.1.1	The TSF shall associate the following user security attributes with subjects acting on the					
	behalf of that user: [assignment: <i>list of user security attributes</i>].					
	[assignment: list of user security attributes].					
	User ID					
	Group ID					
	Allocation Role					
	Role					
FIA_USB.1.2	The TSF shall enforce the following rules on the initial association of user security					
	attributes with the subjects acting on behalf of users: [assignment: <i>rules for the initial association of attributes</i>].					
	[assignment: <i>rules for the initial association of attributes</i>] <i>None</i>					
FIA_USB.1.3	The TSF shall enforce the following rules governing changes to the user security					
	attributes with the subjects acting on behalf of users: [assignment: <i>rules for the changing of attributes</i>].					

[assignment: rules for the changing of attributes] None

6.1.5 Class FMT: Security management

FMT_MOF.1	Management of security functions behaviour					
	Hierarchical to : No other components					
	Dependencies : FMT_SMR.1 Security roles					
	FMT_SMF.1 Specification of Management Functions					
FMT_MOF.1.1	The TSF shall restrict the ability to [selection: determine the behaviour of,					
	disable, enable, modify the behaviour of the functions [assignment: list of					
	functions] to [assignment: the authorised identified roles].					
	[selection: determine the behaviour of, disable, enable, modify the behaviour of]					
	modify the behaviour of					
	[assignment: list of functions]					
	- Enhanced Security Setting - User Authentication function					
	- HDD data overwrite deletion function					
	· Audit Log function					
	- Trusted Channel function					
	[assignment: the authorised identified roles].					
	U.ADMINISTRATOR					
FMT_MSA.1(a)	Management of security attributes					
	Hierarchical to : No other components					
	Dependencies : [FDP_ACC.1 Subset access control, or					
	FDP_IFC.1 Subset information flow control]					

 FMT_SMF.1 Specification of Management Functions

 FMT_MSA.1.1(a)
 The TSF shall enforce the <u>Common Access Control SFP in Table 17</u> (Access Control SFP in Table 6-4, Table 6-5, Table 6-6, Table 6-7, Table 6-8, and Table 6-9),[assignment: access control SFP(s), information flow control SFP(s)] to restrict the ability to

 [selection: change_default, query, modify, delete, [assignment: other operations]] the security attributes [assignment: list of security attributes] to [assignment: the authorized identified roles].

 [assignment: access control SFP(s), information flow control SFP(s)]

 None

 [selection: change_default, query, modify, delete, [assignment: other operations]]

 Refer to Table 6-11, Table 6-12

 [assignment: list of security attributes]

 Refer to Table 6-11, Table 6-12

 [assignment: the authorized identified roles]

 Refer to Table 6-11, Table 6-12

 [assignment: the authorized identified roles]

FMT_SMR.1 Security roles

Access Control SFP	Object Security	Authorized Identified Roles	Operations
	Attribute		operations
Common Access Control SFP PRT Access Control SFP SCN Access Control SFP CPY Access Control SFP FAX Access Control SFP	User ID	Nobody	Any operation
FAX Access Control SFP	Box Type Box User ID	When Box Type is personal user box. -U.NORMAL (who has the same User ID as Box User ID.) -U.ADMINISTRATOR	Modify and Delete Box User ID
	Box Type Box Group ID	When Box Type is group user box. -U.NORMAL (who has the same Group ID as Box Group ID) -U.ADMINISTRATOR	Modify and Delete Box Group ID
	Box Type BOX PASSWORD (except sBOX PASSWORD)	When Box Type is public user box -U.NORMAL (Input of BOX PASSWORD is necessary.) -U.ADMINISTRATOR	Modify and Delete BOX PASSWORD (except sBOX PASSWORD)
	Box Type sBOX PASSWORD	When Box Type is Memory RX user box. U.ADMINISTRATOR	Modify and Delete sBOX PASSWORD
DSR Access Control SFP	Box Type User ID	When Box Type is Password Encrypted PDF user box.	Any operation
	Box Type Box User ID	Nobody When Box Type is personal user box. -U.NORMAL (who has the same User ID as Box User ID) -U.ADMINISTRATOR	Modify and Delete Box User ID
	Box Type Box Group ID	-U.NORMAL (who has the same Group ID as Box Group ID)	Modify and Delete Box Group ID

Table 6-11 Management of Object Security Attribute

	-U.ADMINISTRATOR	
Box Type BOX PASSWORD (except sBOX PASSWORD)	When Box Type is public user box -U.NORMAL (Input of BOX PASSWORD is necessary.) -U.ADMINISTRATOR	Modify and Delete BOX PASSWORD (except sBOX PASSWORD)
Box Type sBOX PASSWORD	When Box Type is Annotation user box U.ADMINISTRATOR	Modify and Delete sBOX PASSWORD
Box Type DOC PASSWORD	When Box Type is Secure Print user box. Nobody	Any operation

Table 6-12 Management of Subject Security Attribute

Access Control SFP	Subject Security	Authorized Identified Roles	Operations
	Attribute		
Common Access Control SFP	User ID	U.ADMINISTRATOR	Create
PRT Access Control SFP			Delete
SCN Access Control SFP			Modify
CPY Access Control SFP			Suspend temporarily
FAX Access Control SFP			Release
DSR Access Control SFP			
FAX Access Control SFP	Group ID	U.ADMINISTRATOR	Create
DSR Access Control SFP			Delete
			Modify
			Suspend temporarily
			Release
	BOX	Nobody	Any operation
	PASSWORD		
	DOC	Nobody	Any operation
	PASSWORD		

* Operator inputs (sets) BOX PASSWORD and DOC PASSWORD.

FMT_MSA.1(b) Management of security attributes

	Hierarchical to	:	No other components
	Denendensies	:	[FDP_ACC.1 Subset access control, or
	Dependencies		FDP_IFC.1 Subset information flow control]
			FMT_SMR.1 Security roles
			FMT_SMF.1 Specification of Management Functions
FMT_MSA.1.1(b)	The TSF shall e	enfor	ce the TOE Function Access Control SFP, [assignment: access

control SFP(s), information flow control SFP(s)] to restrict the ability to [selection: change_default, query, modify, delete, [assignment: other operations]] the security attributes [assignment: list of security attributes] to [assignment: the authorised identified roles]. [assignment: access control SFP(s), information flow control SFP(s)] None [selection: change_default, query, modify, delete, [assignment: other operations]] Refer to Table 6-13, Table 6-14 [assignment: list of security attributes] Refer to Table 6-13, Table 6-14 [assignment: the authorised identified roles] Refer to Table 6-13, Table 6-14

Table 6-13 Management of Subject Attribute

Access Control SFP	Subject Security Attribute	Authorized Identified Roles	Operations
TOE Function Access	Allocation Role	U.ADMINISTRATOR	Delete
Control SFP			Modify

Table 6-14 Management of Object Attribute

Access Control SFP	Object Security Attribute	Authorized Identified Roles	Operations
TOE Function Access	Permission Role	Nobody	Any operation
Control SFP			

FMT_MSA.3(a)	Static attribute initialisation				
	Hierarchical t : No other components				
	Dependencies: : FMT_MSA.1 Management of security attributes				
	FMT_SMR.1 Security roles				
FMT_MSA.3.1(a)	The TSF shall enforce the Common Access Control SFP in Table 17 (Access Control SFP				
	in Table 6-4, Table 6-5, Table 6-6, Table 6-7, Table 6-8, Table 6-9), [assignment: access				
	control SFP, information flow control SFP] to provide [selection, choose one of:				
	restrictive, permissive, [assignment: other property]] default values for security				
	attributes that are used to enforce the SFP.				
	[assignment: access control SFP, information flow control SFP]				
	None				
	[selection, choose one of: restrictive, permissive, [assignment: other property]] default				
	values for security attributes that are used to enforce the SFP.				
	[assignment: other property]				
	refer to Table 6-15				
FMT_MSA.3.2(a)	The TSF shall allow the [assignment: the authorized identified roles] to specify				
	alternative initial values to override the default values when an object or information is				

created.

[assignment: the authorized identified roles] nobody

Access	Object	Function	Object		Default values for Object Security
Control		Attribute	Attribute		Attribute
SFP					
Common	D.DOC	+PRT	User ID		User ID of U.NORMAL who
Access		+SCN			created the left Object
Control		+CPY			
SFP		+FAXOUT			
	D.FUNC	+PRT	User ID		User ID of U.NORMAL who
		+CPY			created the left Object
		+SCN			
		+DSR			
		+FAXIN			
		+FAXOUT			
PRT	D.DOC	+PRT	User ID		User ID of U.NORMAL who
Access					created the left Object
Control					
SFP					
SCN	D.DOC	+SCN	User ID		User ID of U.NORMAL who
Access					created the left Object
Control					
SFP					
CPY	D.DOC	+CPY	User ID		User ID of U.NORMAL who
Access					created the left Object
Control					
SFP					
FAX	D.DOC	+FAXOUT	User ID		User ID of U.NORMAL who
Access					created the left Object
Control		+FAXIN	Box Type	Box User ID	Box Type and Box User ID of the
SFP					user box, when the object is saved
					in the personal user box.
			Box Type	Box Group ID	Box Type and Box Group ID of the
					user box, when the object is saved
					in the group user box.
			Box Type	BOX PASSWORD	Box Type and BOX PASSWORD of
					the user box, when the object is
					saved in the Memory RX user box
					or public user box.
DSR	D.DOC	+DSR	Box Type	User ID	Box Type of the user box and User
Access					ID of U.NORMAL who generated
Control					the object, when the objects is

Table 6-15 Characteristics Static Attribute Initialization

ſ			
SFP			saved in the Password Encrypted
			PDF user box.
	Box Type	Box User ID	Box Type and Box User ID, when
			the object is saved in the personal
			user box.
	Box Type	Box Group ID	Box Type and Box Group ID, when
			the object is saved in the group
			user box.
	Box Type	BOX PASSWORD	Box Type and BOX PASSWORD of
			the user box, when the object is
			saved in any of public user box, or
			Annotation user box.
	Box Type	DOC PASSWORD	When the object is secure print,
			Box Type is secure print user box
			and DOC PASSWORD is the
			password which is input for
			generating the object.
	Box Type	_	When an object exists in USB,
			Box Type is USB.

* Multiple Function Attributes are not given at the same time since it is given corresponding to the functions (print, scan, etc.) that generate objects.

Object Attribute is given in sets with Function Attribute. Multiple User IDs, Box User IDs, Box Group IDs, BOX PASSWORDs, and DOC PASSWORDs are not given at the same time since it is given corresponding to the Box Type. Box Type is the attribute for identifying the type of user box storage.

FMT_MSA.3(b)	Static attribute initialisation		
	Hierarchical to : No other components		
	Dependencies: : FMT_MSA.1 Management of security attributes		
	FMT_SMR.1 Security roles		
FMT_MSA.3.1(b)	The TSF shall enforce the $\underline{\text{TOE Function Access Control Policy}}$ (TOE Function		
	Access Control SFP), [assignment: access control SFP, information flow control		
	SFP] to provide [selection, choose one of: restrictive, permissive, [assignment:		
	other property] default values for security attributes that are used to enforce		
	the SFP.		
	[assignment: access control SFP, information flow control SFP]		
	None		
	[selection, choose one of: restrictive, permissive, [assignment: other property]]		
	[assignment: other property]		
	Refer to Table 6-16		
FMT_MSA.3.2(b)	The TSF shall allow the [assignment: the authorized identified roles] to specify		
	alternative initial values to override the default values when an object or		
	information is created.		
	[assignment: the authorized identified roles]		
	nobody		

Object	Object	Characteristics which restricts access only to Subject which any	
(TOE Function)	Attribute	of the following attributes	
F.PRT	Permission Role	Print Role	
F.SCN	Permission Role	Scan Role	
F.CPY	Permission Role	Copy Role	
F.FAX	Permission Role	Fax Role	
F.DSR	Permission Role	DSR Role	

Table 6-16 Characteristics Static Attribute Initialization

FMT_MTD.1	Management of TSF data
	Hierarchical to : No other components
	Dependencies: : FMT_SMR.1 Security roles
	FMT_SMF.1 Specification of Management Functions
FMT_MTD.1.1(a)	The TSF shall restrict the ability to [selection: <i>change_default, query, modify, delete, clear, [assignment: other operations]</i>] the [assignment: <i>list of TSF data</i>] to [selection, choose one of: <i>Nobody</i> , [selection: <i>U.ADMINISTRATOR</i> , [assignment: <i>the authorized identified roles except U.NORMAL</i>]]].
	[selection: change_default, query, modify, delete, clear, [assignment: other operations]]
	refer to Table 6-17
	[assignment: other operations]
	refer to Table 6-17
	[assignment: <i>list of TSF data</i>]
	refer to Table 6-17
	[selection, choose one of: <i>Nobody</i> , [selection: <i>U.ADMINISTRATOR</i> , [assignment: <i>the</i>
	authorized identified roles except U.NORMAL]]]
	refer to Table 6-17
FMT_MTD.1.1(b)	The TSF shall restrict the ability to [selection: <i>change_default, query, modify, delete,</i>
	clear, [assignment: other operations]] the [assignment: list of TSF data associated with
	a U.NORMAL or TSF data associated with documents or jobs owned by a U.NORMAL]
	to [selection, choose one of: Nobody, [selection: U.ADMINISTRATOR, the U.NORMAL
	to whom such TSF data are associated]].
	refer to Table 6-18

-	
Authorized Identification Roles	Operations
U.ADMINISTRATOR	Register
	Modify
U.ADMINISTRATOR	Modify
U.ADMINISTRATOR	Set
	Modify
U.ADMINISTRATOR	Modify
U.ADMINISTRATOR	Modify
	U.ADMINISTRATOR U.ADMINISTRATOR U.ADMINISTRATOR U.ADMINISTRATOR

Table 6-17 Operation of TSF Data

Auto logout time	U.ADMINISTRATOR	Modify
Authentication Failure Frequency Threshold	U.ADMINISTRATOR	Modify
Number of Authentication Failure (except	U.ADMINISTRATOR	Clear
Administrators)		
Password mismatch frequency threshold	U.ADMINISTRATOR	Modify
Number of Password mismatch	U.ADMINISTRATOR	Clear
Password rule	U.ADMINISTRATOR	Modify
External server authentication setting data	U.ADMINISTRATOR	Register
		Modify
Account Name (Account identification data of	U.ADMINISTRATOR	Modify
U.NORMAL)		
Account	U.ADMINISTRATOR	Register
		Modify
		Delete
Account Password	U.ADMINISTRATOR	Register
		Modify
Release time of operation prohibition for	U.ADMINISTRATOR	Modify
Administrator authentication		
Network Settings	U.ADMINISTRATOR	Register
		Modify
Setting related with transfer of RX fax	U.ADMINISTRATOR	Modify
Transmission address setting	U.ADMINISTRATOR	Register
		Modify
Audit Log	U.ADMINISTRATOR	Query
		Delete

Table 6-18 Operation of TSF Data

TSF Data	Authorized Identification Roles	Operations
Login Password of U.NORMAL	User who is related with the password	Modify
	(U.NORMAL)	
	U.ADMINISTRATOR	
Account Name	User who knows account password	Register
(Account identification data of U.NORMAL)	related to the account ID (U.NORMAL)	
	U.ADMINISTRATOR	

FMT_SMF.1	Specification of Management Functions				
	Hierarchical to : No other components				
FMT_SMF.1.1	Dependencies: : No dependencies				
	The TSF shall be capable of performing the following management functions:				
	[assignment: list of management functions to be provided by the TSF].				
	[assignment: list of management functions to be provided by the TSF]				

refer to Table 6-19

Table 6-19 list of manag	gement functions
--------------------------	------------------

management functions
Management function of Enhanced Security Setting by U.ADMINISTRATOR
Management function of User Authentication function by U.ADMINISTRATOR
Operation setting function of HDD data overwrite deletion function by U.ADMINISTRATOR
Audit log management function by U.ADMINISTRATOR
Trusted Channel management function by U.ADMINISTRATOR
User management function by U.ADMINISTRATOR
Temporary suspension and Release function of User ID and Account ID of U.NORMAL by
U.ADMINISTRATOR
Registration and modification function of U.NORMAL's login password by U.ADMINISTRATOR
Modification function of one's own login password by U.NORMAL
Registration and modification function of account password by U.ADMINISTRATOR
Modification function of one's own login password by U.ADMINISTRATOR
Setting and modification function of encryption passphrase by U.ADMINISTRATOR
Modification function of date and time information by U.ADMINISTRATOR
Modification function of auto reset time by U.ADMINISTRATOR
Modification function of auto logout time by U.ADMINISTRATOR
Modification function of Authentication failure frequency threshold by U.ADMINISTRATOR
Registration and modification function of External server authentication setting data by
U.ADMINISTRATOR
Modification function of release time of operation prohibition of administrator authentication by
U.ADMINISTRATOR
Registration and modification and deletion function of account by U.ADMINISTRATOR
Registration and Modification function of Belonging Account of U.NORMAL by U.ADMINISTRATOR
Registration function of his/her own Belonging Account by U.NORMAL
Deletion function of Password mismatch frequency by U.ADMINISTRATOR
Modification function of Password mismatch frequency threshold by U.ADMINISTRATOR
Deletion function of Authentication failure frequency (except administrator) by U.ADMINISTRATOR
Modification function of Password policy by U.ADMINISTRATOR
Registration and Modification function of Network setting by U.ADMINISTRATOR
Registration and Modification function of transmission address by U.ADMINISTRATOR
Modification function of Settings for forwarding RX Fax by U.ADMINISTRATOR
Management function of Object security attributes (except User ID, Box Type, DOC PASSWORD, Permission
Role) by U.NORMAL
Management function of Object security attributes (except User ID, Box Type, DOC PASSWORD, BOX
PASSWORD and DOC PASSWORD which are the security attributes of subject) by U.ADMINISTRATOR
Management function of Subject security attributes (except object of management by user management
function, User ID, Temporary suspension and release of account ID, BOX PASSWORD, DOC PASSWORD) by
U.ADMINISTRATOR

FMT_SMR.1	Security roles				
	Hierarchical to : No other components				
	Dependencies: : FIA_UID.1 Timing of identification				
FMT_SMR.1.1	The TSF shall maintain the roles U.ADMINISTRATOR, U.NORMAL, [selection:				
	<i>Nobody</i> , [assignment: <i>the authorised identified roles</i>]].				
	[selection: Nobody, [assignment: the authorised identified roles]]				
	Nobody				
FMT_SMR.1.2	The TSF shall be able to associate users with roles, except for the role "Nobody" to which				
	no user shall be associated.				

6.1.6 Class FPT: Protection of the TSF

FPT_FDI_EXP.1	Restricted forwarding of data to external interfaces		
	Hierarchical to	:	No other components
	Dependencies:	:	FMT_SMF.1 Specification of Management Functions
			FMT_SMR.1 Security roles
FPT_FDI_EXP.1.1	The TSF shall provide the capability to restrict data received on any external Inter-		
	from being forwa	arded	without further processing by the TSF to any Shared-medium

Interface.

FPT_STM.1	Reliable time stamps			
	Hierarchical to	:	No other components	
	Dependencies:	:	No dependencies	
FPT_STM.1.1	TSF shall be able	to pr	covide reliable time stamps.	

FPT_TST.1	TSF testing				
	Hierarchical to : No other components				
	Dependencies: : No dependencies				
FPT_TST.1.1	The TSF shall run a suite of self tests [selection: during initial start-up, periodically				
	during normal operation, at the request of the authorised user, at the conditions				
	[assignment: conditions under which self test should occur]] to demonstrate the correct				
	operation of [selection: [assignment: parts of TSF], the TSF].				
	[selection: during initial start-up, periodically during normal operation, at the request				
	of the authorised user, at the conditions [assignment: conditions under which self test				
	should occur]]				
	during initial start-up				
	[selection: [assignment: parts of TSF], the TSF]				
	[assignment: parts of TSF]				
	HDD Encryption Function				
	Verification function of TSF executable code				
FPT_TST.1.2	The TSF shall provide authorised users with the capability to verify the integrity of				
	[selection: [assignment: parts of TSF], TSF data].				

	[selection: [assignment: parts of TSF], TSF data].
	[assignment: parts of TSF]
	Encryption passphrase
FPT_TST.1.3	The TSF shall provide authorised users with the capability to verify the integrity of
	stored TSF executable code.

6.1.7 Class FTA: TOE access

FTA_SSL.3	TSF-initiated termination		
	Hierarchical to : No other components		
	Dependencies: : No dependencies		
FTA_SSL.3.1	The TSF shall terminate an interactive session after a [assignment: time		
	interval of user inactivity].		
	[assignment: time interval of user inactivity]		
	- Time decided by the auto reset time in case of operation panel.		
	- Time decided by auto logout time in case of Web Connection		
	- 60 minutes in case of Data Administrator		
	- No interactive session in case of printer driver or fax.		

6.1.8 Class FTP: Trusted path/channels

FTP_ITC.1	Inter-TSF trusted channel
	Hierarchical to : No other components
	Dependencies: : No dependencies
FTP_ITC.1.1	The TSF shall provide a communication channel between itself and another trusted IT
	product that is logically distinct from other communication channels and provides
	assured identification of its end points and protection of the communicated data from
	modification or disclosure.
FTP_ITC.1.2	The TSF shall permit the TSF, another trusted IT product to initiate communication
	via the trusted channel.
FTP_ITC.1.3	The TSF shall initiate communication via the trusted channel for communication of
	D.DOC, D.FUNC, D.PROT, and D.CONF over any Shared-medium Interface.

6.2 Security assurance requirements

Table 6-20 lists the security assurance requirements for 2600.1-PP, Protection Profile for Hardcopy Devices, Operational Environment A, and related SFR packages, EAL 3 augmented by ALC_FLR.2.

Assurance class	Assurance components
ADV: Development	ADV_ARC.1 Security architecture description
	ADV_FSP.3 Functional specification with complete summary
	ADV_TDS.2 Architectural design
AGD: Guidance documents	AGD_OPE.1 Operational user guidance
	AGD_PRE.1 Preparative procedures
ALC: Life-cycle support	ALC_CMC.3 Authorisation controls
	ALC_CMS.3 Implementation representation CM coverage
	ALC_DEL.1 Delivery procedures
	ALC_DVS.1 Identification of security measures
	ALC_FLR.2 Flaw reporting procedures (augmentation of EAL3)
	ALC_LCD.1 Developer defined life-cycle model
ASE: Security Target evaluation	ASE_CCL.1 Conformance claims
	ASE_ECD.1 Extended components definition
	ASE_INT.1 ST introduction
	ASE_OBJ.2 Security objectives
	ASE_REQ.2 Derived security requirements
	ASE_SPD.1 Security problem definition
	ASE_TSS.1 TOE summary specification
ATE: Tests	ATE_COV.2 Analysis of coverage
	ATE_DPT.1 Testing: basic design
	ATE_FUN.1 Functional testing
	ATE_IND.2 Independent testing—sample
AVA: Vulnerability assessment	AVA_VAN.2 Vulnerability analysis

Table 6-20 IEEE 2600.1 Security Assurance Requirements

6.3 Security requirements rationale

6.3.1 Common security requirements rationale

Table 6-21 and Table 6-22 demonstrate the completeness and sufficiency of SFRs that fulfill the objectives of the TOE. **Bold typeface** items provide principal (P) fulfillment of the objectives, and normal typeface items provide supporting (S) fulfillment.

SFRs 0.000			Objectives									
$ \begin{array}{c c c c c c c c c c c c c c c c c c c $												
FAU_GEN.2IIIIIIIIIIFAU_SAR.1IIIIIIIIIIIIFAU_SAR.2II <t< td=""><td>SFRs</td><td>O.DOC.NO_DIS</td><td>O.DOC.NO_ALT</td><td>O.FUNC.NO_ALT</td><td>O.PROT.NO_ALT</td><td>O.CONF.NO_DIS</td><td>O.CONF.NO_ALT</td><td>O.USER.AUTHORIZED</td><td>O.INTERFACE.MANAGED</td><td>O.SOFTWARE.VERIFIED</td><td>O.AUDIT.LOGGED</td><td>O.HDD.CRYPTO</td></t<>	SFRs	O.DOC.NO_DIS	O.DOC.NO_ALT	O.FUNC.NO_ALT	O.PROT.NO_ALT	O.CONF.NO_DIS	O.CONF.NO_ALT	O.USER.AUTHORIZED	O.INTERFACE.MANAGED	O.SOFTWARE.VERIFIED	O.AUDIT.LOGGED	O.HDD.CRYPTO
FAU_GEN.2IIIIIIIIIIFAU_SAR.1IIIIIIIIIIIIFAU_SAR.2II <t< td=""><td>FAU_GEN.1</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>Р</td><td></td></t<>	FAU_GEN.1										Р	
FAU_SAR.2Image: selection of the											Р	
FAU_SAR.2Image: selection of the												
FAU_STG.1 I I I I I P FAU_STG.4(1) I I I I I P FAU_STG.4(2) I I I I P P FCS_CKM.1 I I I I I P P FCS_COP.1 I I I I I I P P FDP_ACC.1(a) P P P I I I I I P FDP_ACC.1(b) I <												
FAU_STG.4(1) Image: constraint of the state of the												
FAU_STG.4(2) P FCS_CKM.1 P FCS_COP.1 P FDP_ACC.1(a) P P P P P P FDP_ACC.1(b) P P												
FCS_CKM.1 I <thi< th=""> I <thi< th=""> <thi< t<="" td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></thi<></thi<></thi<>												
FCS_COP.1II<												Р
FDP_ACC.1(a)PPPIIIIIIFDP_ACC.1(b)IIIIIPIIIFDP_ACF.1(a)SSSIISSIIIFDP_ACF.1(b)IIIIISSIIIFDP_RIP.1PIIIIIIIIIIFIA_AFL.1IIIIIIIIIIIFIA_SOS.1(1)SSSIISSIIIFIA_UAU.1IIIIIIIIIIIIFIA_UAU.1II												Р
FDP_ACC.1(b) Image: sector of the sector		Р	Р	Р								
FDP_ACF.1(a) S S S I <thi< th=""> <th< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>Р</td><td></td><td></td><td></td><td></td></th<></thi<>								Р				
FDP_ACF.1(b) Image: sector of the sector		S	S	S								
FDP_RIP.1 P I <thi< th=""> I <thi< th=""> <thi< t<="" td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>S</td><td></td><td></td><td></td><td></td></thi<></thi<></thi<>								S				
FIA_AFL.1 I I I I S S I I I FIA_ATD.1 I I I I I S S I		Р										
FIA_ATD.1 I I I I S S I S S I I S I I I S I I I S I I I S I I I S I <thi< th=""> I <thi< th=""> <thi< t<="" td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>S</td><td></td><td></td><td></td><td></td></thi<></thi<></thi<>								S				
FIA_SOS.1(1) S S S I I S S I I S I <thi< th=""> I I <thi< th=""> <th< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></th<></thi<></thi<>												
FIA_SOS.1(2) Image: sector of the sector		S	S	S								
FIA_UAU.1 Image: sector of the sector of												S
FIA_UAU.6 I I I S S I I FIA_UAU.7 I I I I S S I I I FIA_UAU.7 I I I I I S S I I I FIA_UID.1 S S S S S P P S S FIA_USB.1 I								Р	Р			-
FIA_UAU.7 Image: Constraint of the stress of the stres												
FIA_UID.1 S S S S S P P S S FIA_USB.1 - - - - P - - - P - - - - P - - - - P -												
FIA_USB.1 Image: Constraint of the symbol consymbol consymbol constraint of the symbol constraint of		S	S	S	S	S	S		Р		S	S
FMT_MOF.1 S												
FMT_MSA.1(a) S S S P P P Image: Constraint of the state of the s		s	s	s	s	S	s		s		S	s
FMT_MSA.1(b) P S C FMT_MSA.3(a) S S S C C C FMT_MSA.3(b) S S S C C C C FMT_MSA.3(b) C C S S C C C FMT_MSA.3(b) C C S S C C C FMT_MTD.1 S P P P S S S								~			~	~
FMT_MSA.3(a) S S S Image: Constraint of the state of the		~	~	~				s				
FMT_MSA.3(b) S S FMT_MTD.1 S P P P S S		S	S	S				~				
FMT_MTD.1 S P P S		~	~	~				s				
		S			Р	Р	Р	N				S
FMT SMF1 ISISISISISISISISISI	FMT_SMF.1	S	S	S	S	S	S	S	S		S	S

Table 6-21 Completeness of security requirements

					(Objecti	ves				
SFRs	O.DOC.NO_DIS	O.DOC.NO_ALT	O.FUNC.NO_ALT	O.PROT.NO_ALT	O.CONF.NO_DIS	O.CONF.NO_ALT	O.USER.AUTHORIZED	O.INTERFACE.MANAGED	O.SOFTWARE.VERIFIED	O.AUDIT.LOGGED	O.HDD.CRYPTO
FMT_SMR.1	S	S	S	S	S	S	S				S
FPT_FDI_EXP.1								Р			
FPT_STM.1										S	
FPT_TST.1									Р		
FTA_SSL.3							Р	Р			
FTP_ITC.1	Р	Р	Р	Р	Р	Р					

Table 6-22 Sufficiency of security requirements

Objectives	Description	SFRs	Purpose
O.DOC.NO_DIS,	Protection of User	FDP_ACC.1(a)	Enforces protection by establishing an
O.DOC.NO_ALT,	Data from		access control policy.
O.FUNC.NO_ALT	unauthorized	FDP_ACF.1(a)	Supports access control policy by
	disclosure or		providing access control function.
	alteration	FIA_UID.1	Supports access control and security
			roles by requiring user identification.
		FMT_MOF.1	Supports protection by management of
			security functions behavior.
		FMT_MSA.1(a)	Supports access control function by
			enforcing control of security attributes.
		FMT_MSA.3(a)	Supports access control function by
			enforcing control of security attribute
			defaults.
		FMT_SMF.1	Supports control of security attributes
			by requiring functions to control
			attributes.
		FMT_SMR.1	Supports control of security attributes
			by requiring security roles.
		FTP_ITC.1	Enforces protection by requiring the
			use of trusted channels for
			communication of data over
			Shared-medium Interfaces.
		FIA_SOS.1(1)	Supports authorization by requiring by
			specification of secrets.
O.DOC.NO_DIS	Protection of User	FDP_RIP.1	Enforces protection by making residual

	D (D)		1,
	Document Data		data unavailable.
	from unauthorized	FMT_MTD.1	Supports protection by management of
	disclosure		TSF data.
O.PROT.NO_ALT,	Protection of TSF	FIA_UID.1	Supports access control and security
	Data from		roles by requiring user identification.
	unauthorized	FMT_MOF.1	Supports protection by management of
	alteration		security functions behavior.
		FMT_MSA.1(a)	Supports access control function by
			enforcing control of security attributes.
		FMT_MSA.1(b)	Supports access control function by
			enforcing control of security attributes.
		FMT_MTD.1	Enforces protection by restricting
			access.
		FMT_SMF.1	Supports control of security attributes
			by requiring functions to control
			attributes.
		FMT_SMR.1	Supports control of security attributes
			by requiring security roles.
		FTP_ITC.1	Enforces protection by requiring the
			use of trusted channels for
			communication of data over
			Shared-medium Interfaces.
O.CONF.NO_DIS,	Protection of TSF	FIA_UID.1	Supports access control and security
O.CONF.NO_ALT	Data from		roles by requiring user identification.
	unauthorized	FMT_MOF.1	Supports protection by management of
	disclosure or	_	security functions behavior.
	alteration	FMT_MSA.1(a)	Supports access control function by
			enforcing control of security attributes.
		FMT_MTD.1	Enforces protection by restricting
			access.
		FMT_SMF.1	Supports control of security attributes
			by requiring functions to control
			attributes.
		FMT_SMR.1	Supports control of security attributes
		1.111_01110.1	by requiring security roles.
		FTP_ITC.1	Enforces protection by requiring the
			use of trusted channels for
			communication of data over
			Shared-medium Interfaces.
O.USER_AUTHORIZED	Authorization of	FDP_ACC.1(b)	Enforces authorization by establishing
	Normal Users and	1 D1_A00.1(0)	an access control policy.
	Administrators to	FDP_ACF.1(b)	Supports access control policy by
	use the TOE	TDI_AUT.1(0)	providing access control function.
		FIA AFT 1	
		FIA_AFL.1	Enforces authorization by requiring
			access control.

		FIA_ATD.1	Supports authorization by associating
			security attributes with users.
		FIA_SOS.1(1)	Supports authorization by requiring by
			specification of secrets.
		FIA_UAU.1	Enforces authorization by requiring
			user authentication.
		FIA_UAU.6	Enforces authorization by requiring
			user authentication.
		FIA_UAU.7	Enforces authorization by requiring
			user authentication.
		FIA_UID.1	Enforces authorization by requiring
			user identification.
		FIA_USB.1	Enforces authorization by
		111_00011	distinguishing subject security
			attributes associated with user roles.
		FMT_MOF.1	Supports protection by management of
		FMI_MOF.1	
			security functions behavior.
		FMT_MSA.1(b)	Supports access control function by
			enforcing control of security attributes.
		FMT_MSA.3(b)	Supports access control function by
			enforcing control of security attribute
			defaults.
		FMT_SMF.1	Supports control of security attributes
			by requiring functions to control
			attributes.
		FMT_SMR 1	Supports authorization by requiring
			security roles.
		FTA_SSL.3	Enforces authorization by terminating
			inactive sessions.
O.INTERFACE.MANAGED	Management of	FIA_UAU.1	Enforces management of external
	external interfaces		interfaces by requiring user
			authentication.
		FIA_UAU.6	Enforces authorization by requiring
			user authentication.
		FIA_UID.1	Enforces management of external
		FIA_01D.1	interfaces by requiring user
			authentication.
		FMT_MOF.1	Supports protection by management of
			security functions behavior.
		FMT_SMF 1	Supports control of security attributes
			by requiring functions to control
			attributes.
		FPT_FDI_EXP.1	Enforces management of external
			interfaces by requiring (as needed)
			administrator control of data

			transmission from external Interfaces
			to Shared-medium Interfaces.
		FTA_SSL.3	Enforces management of external
			interfaces by terminating inactive
			sessions.
O.SOFTWARE.VERIFIED	Verification of	FPT_TST.1	Enforces verification of software by
	software integrity	_	requiring self-tests.
O.AUDIT.LOGGED	Logging and	FAU_GEN.1	Enforces audit policies by requiring
	authorized access to		logging of relevant events.
	audit events	FAU_GEN.2	Enforces audit policies by requiring
			logging of information associated with
			audited events.
		FAU_SAR.1	Enforces audit policies by providing
			security audit record.
		FAU_SAR.2	Enforces audit policies by restricting
			reading of security audit records.
		FAU_STG.1	Enforces audit policies by protecting
			from unauthorised deletion and/or
			modification.
		FAU_STG.4(1)	Enforces audit policies by preventing
			audit data loss.
		FAU_STG.4(2)	Enforces audit policies by preventing
			audit data loss.
		FIA_UID.1	Enforces management of external
			interfaces by requiring user
			authentication.
		FMT_MOF.1	Supports protection by management of
			security functions behavior.
		FMT_SMF 1	Supports control of security attributes
			by requiring functions to control
			attributes.
		FPT_STM.1	Supports audit policies by requiring
			time stamps associated with events.
O.HDD.CRYPTO	The encryption of	FCS_CKM.1	Generates encryption key
	data	FCS_COP.1	Encrypts
		$FIA_SOS.1(2)$	Verifies the quality of the data which is
			the source of the encryption key
		FIA_UID.1	Enforces authorization by requiring
			user identification.
		FMT_MOF.1	Supports protection by management of
			security functions behavior.
		FMT_MTD.1	Enforces protection by restricting
			access.
		FMT_SMF.1	Supports control of security attributes
			by requiring functions to control

	attributes.
FMT_SMR.1	Supports authorization by requiring
	security roles.

6.3.1.1 The dependencies of security requirements

The dependencies of the security functional requirements components are shown in the following table. When dependencies specified in the CC Part 2 are not satisfied, the rationale is provided in the section for the "Dependencies Relation in this ST."

Functional Requirements Component for this ST	Dependencies on CC Part2	Dependencies Relation in this ST
FAU_GEN.1	FPT_STM.1	FPT_STM.1
FAU_GEN.2	FAU_GEN.1	FAU_GEN.1
FRO_GEN.2	FIA_UID.1	FIA_UID.1
FAU_SAR.1	FAU_GEN.1	FAU_GEN.1
FAU_SAR.2	FAU_SAR.1	FAU_SAR.1
FAU_STG.1	FAU_GEN.1	FAU_GEN.1
FAU_STG.4(1)	FAU_STG.1	FAU_STG.1
FAU_STG.4(2)	FAU_STG.1	FAU_STG.1
FCS_CKM.1 FCS_COP.1	[FCS_CKM.2 or FCS_COP.1] FCS_CKM.4 [FDP_ITC.1 or FDP_ITC.2 or FCS_CKM.1] FCS_CKM.4	FCS_COP.1 <the apply="" fcs_ckm.4="" not="" rationale="" to=""> The encryption key is used for encrypting HDD data and generated when turning the power ON. The generated key is stored in the volatile memory, but there is no necessity to consider the encryption key destruction since no external interface to access this key is not provided and it is destroyed by turning off the power. FCS_CKM.1 <the apply="" fcs_ckm.4="" not="" rationale="" to=""> The encryption key is used for encrypting HDD data and generated when turning the power ON. The generated key is stored in the volatile memory, but there is no necessity to consider the encryption key destruction since no external interface to access this key is not provided and it is destroyed by turning off</the></the>
		the power.
FDP_ACC.1(a)	FDP_ACF.1	FDP_ACF.1(a)
FDP_ACC.1(b)	FDP_ACF.1	FDP_ACF.1(b)
FDP_ACF.1(a)	FDP_ACC.1 FMT_MSA.3	FDP_ACC.1(a) FMT_MSA.3(a)
FDP_ACF.1(b)	FDP_ACC.1 FMT_MSA.3	FDP_ACC.1(b) FMT_MSA.3(b)
FDP_RIP.1	None	N/A
FIA_AFL.1	FIA_UAU.1	FIA_UAU.1
FIA_ATD.1	None	N/A
FIA_SOS.1(1)	None	N/A
FIA_SOS.1(2)	None	N/A

Table 6-23 The dependencies of security requirements

Functional Requirements Component for this ST	Dependencies on CC Part2	Dependencies Relation in this ST
FIA_UAU.1	FIA_UID.1	FIA_UID.1
FIA_UAU.6	None	N/A
FIA_UAU.7	FIA_UAU.1	FIA_UAU.1
FIA_UID.1	None	N/A
FIA_USB.1	FIA_ATD.1	FIA_ATD.1
FMT_MOF.1	FMT_SMR.1 FMT_SMF.1	FMT_SMR.1 FMT_SMF.1
FMT_MSA.1(a)	[FDP_ACC.1 orFDP_IFC.1] FMT_SMR.1 FMT_SMF.1	FDP_ACC.1(a) FMT_SMR.1 FMT_SMF.1
FMT_MSA.1(b)	[FDP_ACC.1 orFDP_IFC.1] FMT_SMR.1 FMT_SMF.1	FDP_ACC.1(b) FMT_SMR.1 FMT_SMF.1
FMT_MSA.3(a)	FMT_MSA.1 FMT_SMR.1	FMT_MSA.1(a) FMT_SMR.1
FMT_MSA.3(b)	FMT_MSA.1 FMT_SMR.1	FMT_MSA.1(b) FMT_SMR.1
FMT_MTD.1	FMT_SMR.1 FMT_SMF.1	FMT_SMR.1 FMT_SMF.1
FMT_SMF.1	None	N/A
FMT_SMR.1	FIA_UID.1	FIA_UID.1
FPT_STM.1	None	N/A
FPT_TST.1	None	N/A
FTA_SSL.3	None	N/A
FTP_ITC.1	None	N/A
FPT_FDI_EXP.1	FMT_SMF.1 FMT_SMR.1	FMT_SMF.1 FMT_SMR.1

6.3.2 Security assurance requirements rationale

This Protection Profile has been developed for Hardcopy Devices used in restrictive commercial information processing environments that require a relatively high level of document security, operational accountability, and information assurance. The TOE environment will be exposed to only a low level of risk because it is assumed that the TOE will be located in a restricted or monitored environment that provides almost constant protection from unauthorized and unmanaged access to the TOE and its data interfaces. Agents cannot physically access any nonvolatile storage without disassembling the TOE except for removable nonvolatile storage devices, where protection of User and TSF Data are provided when such devices are removed from the TOE environment. Agents have limited or no means of infiltrating the TOE with code to effect a change, and the TOE self-verifies its executable code to detect unintentional malfunctions. As such, the Evaluation Assurance Level 3 is appropriate. EAL 3 is augmented with ALC_FLR.2, Flaw reporting procedures. ALC_FLR.2 ensures that instructions and procedures for the reporting and remediation of identified security flaws are in place, and their inclusion is expected by the consumers of this TOE.

7 TOE Summary specification

The list of the TOE security functions led from the TOE security functional requirements is shown in Table 7-1. The detail is explained in the paragraph described below.

No.		TOE Security Function
1	F.AUDIT Audit log function	
2	F.HDD_ENCRYPTION	HDD encryption function
3	F.ACCESS_DOC	Accumulated documents access control function
4	F.ACCESS_FUNC	User restriction control function
5	F.RIP Residual information deletion function	
6	F.I&A Identification and Authentication function	
7	F.SEPARATE_EX_INTERFACE	External interface separation function
8	F.SELF_TEST	Self-test function
9	F.MANAGE	Management function
10	F.SEUCRE_LAN	Network protection function

Table 7-1	Names and identifiers of TOE Security Functions
-----------	---

7.1 F.AUDIT (Audit log function)

F.AUDIT acquires audit log and also protects the acquired audit log against alteration and disclosure.

- $7.1.1 \, {
 m Audit} \log$ acquirement function
 - Corresponding functional requirements: FAU_GEN.1, FAU_GEN.2

The TOE generates the	e following log.
-----------------------	------------------

Events	Log
Start of Audit log acquirement function	Start data/time of events
End of Audit log acquirement function	End data/time of events
Read out document information to client PC, etc.	Identification information of events
Print of document information	Identification information of subjects
Copy of document information	Result of the events (Success or failure)
FAX TX of document information	
FAX RX of document information	
Store of document information	
Delete of document information	
Export of document information	
Import of document information	
Success and Failure of login operation	

Table 7-2 Audit Log

Authentication Suspension
Recover from authentication suspension state
Use of management function of Table 6-19
Failure of communication through the network
Change of time information
End of session by auto session terminate function

7.1.2 Audit Log Review Function

Corresponding functional requirements: FAU_SAR.1, FAU_SAR.2

The TOE restricts the read of audit log only to U.ADMINISTRATOR. The TOE provides U.ADMINISTRATOR with the function to download the audit log to client PC.

7.1.3 Audit storage function

- Corresponding functional requirements: FAU_STG.1, FAU_STG.4(1), FAU_STG.4(2) The TOE prohibits the modification of audit log. The TOE stores the audit log in the HDD of the TOE, but the following process is performed when the storage area became full.

- (1)When "Restriction of overwriting" is set,
 - the acceptance of jobs is suspended.
- (2) When "Permission of overwriting" is set,
 - the oldest stored audit \log is overwritten.

The settings of (1) and (2) are performed by U.ADMINISTRATOR.

7.1.4 Trusted time stamp function

· Corresponding functional requirements: FPT_STM.1, FMT_MTD.1

The TOE has clock function and provides U.ADMINISTRATOR with the function to modify TOE time. Only U.ADMINISTRATOR can change the time information by FMT_MTD.1. The TOE issues time stamp of clock function at the time of audit log generation and records as the audit log.

7.2 F.HDD_ENCRYPTION (HDD Encryption function)

- Corresponding functional requirements: FCS_CKM.1, FCS_COP.1, FIA_SOS.1(2)

The TOE performs encryption to protect data stored in HDD against unauthorized disclosure. Used encryption key and algorithm are as follows.

(1) Encryption Key

Encryption key is generated by Konica Minolta HDD encryption key generation algorism that Konica Minolta encryption specification standard defines. (Encryption key length is 256 bit.)

Unique encryption key for each TOE is generated by generating it based on the encryption passphrase set by U.ADMINISTRATOR. Only encryption passphrase that satisfies the following qualities is accepted.

- > Number of characters: 20 characters
- Character type: possible to choose from 83 or more characters
- ➤ Rule:
 - \diamond Do not compose by only one and the same character.
 - \diamond Do not set the same value as the current setting after change.
- (2) Encryption Algorithm

Encryption algorithm is shown in Table 7-3.

Table 7-3	Encryption	Algorithm i	in HDD	Encryption function
	Buciyption	angorium i		Encryption function

Encryption Key sizes	Encryption Algorithm
256 bit	Encryption algorithm which conforms to FIPS PUB197 (AES)

7.3 F.ACCESS_DOC (Accumulated documents access control function)

- Corresponding functional requirements: FDP_ACC.1(a), FDP_ACF.1(a)

The TOE provides the directory (user box) to accumulate documents. User box is categorized as the System user box and the function user box. Documents are accumulated in the user box, and access control is performed by referring to the user box attributes (this is considered as the attribute of documents existing in the used box) or the document attributes (attribute given to the document directly). And then, this can perform edit (rotate, delete of page, etc.), print, FAX TX, e-mail TX, etc.

The following shows the details of access control of documents in the user box.

User box		Operation of documents in the User box			
0	ser box	create	Modify	read	Delete
Secure Print User box	Saves D.DOC which DOC PASSWORD is given.	U.USER	doc_passwd	doc_passwd	doc_passwd or U.ADMIN
Memory RX User Box	Saves FAX RX documents. BOX PASSWORD is given to FAX RX documents.	_	box_passwd	box_passwd	box_passwd or U.ADMIN
Encrypted PDF User Box	Saves D.DOC which sent to the TOE by the encrypted PDF function	U.USER	x	login_id	login_id or U.ADMIN

Table 7-4 Operation of document in the System user box

U.USER: Represent that U.USER can operate.

U.ADMIN Represent that U. ADMINISTRATOR can operate.

- login_id: Represent that only when User ID of login user and User ID of document are matched it can be operated.
- box_passwd : Represent that only when password that matches to sBOX PASSWORD is input, it can be operated.
- doc_passwd : Represent that only when password that matches to DOC PASSWORD is input, it can be operated.

"create" of Memory RX User Box represents that document is generated by receiving FAX. It is represented with "-", since there is no access control for transmitting FAX.

	Table 7.5 Operation for documents in the function user box					
User box		Operation to documents in User Box				
	0	ser box	create	modify	read	Delete
	Personal	Box User ID is given				login_id
Box	user box	to saved D.DOC	login_id	login_id	login_id	or
	uber box					U.ADMIN
Use	Accumulated User numulated User numulated User numulated User numulated New Numulated	Box Group ID is given				group_id
Ited		to saved D.DOC	group_id	group_id	group_id	or
nla						U.ADMIN
uno		Box PASSWORD is				box_passwd
Ac		given to saved D.DOC	box_passwd	box_passwd	box_passwd	or
user box					U.ADMIN	
A	Box PASSWORD is				sbox_passwd	
Annotation User Box		given to saved D.DOC	sbox_passwd	sbox_passwd	sbox_passwd	or
						U.ADMIN

Table 7-5 Operation for documents in the function user box

U.ADMIN : Represent that U. ADMINISTRATOR can operate.

login_id : Represent that only when User ID of login user and Box User ID are matched it can be operated.

group_id : Represent that only when Group ID of login user and Box Group ID are matched it can be operated.

box_passwd, sbox_passwd : Represent that only when password that matches to BOX PASSWORD is input, it can be operated.

Also, the access to the user box is prohibited when number of continuous mismatch of BOX PASSWORD reached the administrator configurable positive integer within 1-3. And, the access to the document (secure print) is prohibited when number of continuous mismatch of DOC PASSWORD reached the administrator configurable positive integer within 1-3.

7.4 F.ACCESS_FUNC (User restriction control function)

- Corresponding functional requirements: FDP_ACC.1(a), FDP_ACF.1(a), FDP_ACC.1(b), FDP_ACF.1(b), FMT_MSA.1(b)

The TOE permits the operation of F.PRT, F.SCN, F.CPY, F.FAX and F.DSR according to the

authority of identified and authenticated user. Also, operation to Permission Role which is these attributes cannot be performed. Identified and authenticated user can perform only function that is permitted to oneself.

Also, following operations are available to D.DOC and D.FUNC which occur during execution of functions.

Performer is the user who has same User ID with the User ID of D.DOC and D.FUNC of operation objects. The TOE compares both User IDs and only when it matches, that user is accepted as the performer.

-In case of PRINT

Following operations are possible (use ID & Print user box)

-Print

U.NORMAL that performed that printing can print.

-Delete

U.NORMAL and U.ADMINISTRATOR that performed that printing can delete.

-Edit of D.FUNC

U.NORMAL that performed that printing can perform edit of image shift and overlay.

-In case of SCAN

A preview is possible. Following operations are possible in the preview.

-Edit of D.FUNC

U.NORMAL that performed that scanning can rotate by page.

-Edit of D.DOC

U.NORMAL that performed that scanning can delete by page.

Scanned original data can be sent by e-mail and can be saved in user box. The waiting state of transmitting might occur, but in that case, the following operations are possible. -Delete

U.NORMAL and U.ADMINISTRATOR that performed that scanning can delete the job that is waiting state of transmitting.

-In case of COPY

Following operations are possible.

- Print

U.NORMAL that performed that copying can print.

- Preview

U.NORMAL that performed that copying can preview.

Also, following operations are possible in the preview.

- Edit of D.FUNC

U.NORMAL that performed that copying can rotate the output by page.

- Delete

U.NORMAL and U.ADMINISTRATOR that performed that copying can delete the job.

-In case of FAX RX

U.USER can cancel FAX under receiving.

D.DOC received by FAX is saved in the user box.

-In case of FAX TX

A preview is possible. Following operations are possible in the preview.

-Edit of D.FUNC

U.NORMAL that performed that FAX TX can rotate by page.

-Delete

U.NORMAL and U.ADMINISTRATOR that performed that FAX TX can delete the job. -Edit of D.DOC

U.NORMAL that performed that FAX TX can delete by page.

-In case of Data saved in User box

Operation according to access control that is defined on Table 6-9 (Table 6-8 in case of FAX RX) to data saved in User box is possible.

-In case of Data saved in USB

When USB flash drive is loaded, the document in the USB flash drive can be read. Read document can be printed and can be saved in the user box. This function can be performed only on the operation panel and cannot be operated through the network such as interface of Web.

7.5 F.RIP (Residual information deletion function)

7.5.1 Temporary Data Deletion Function

- Corresponding functional requirement: FDP_RIP.1

The TOE prevents to reuse the residual information by overwriting and deleting the deleted document, the temporary document or its parts in HDD. This function is performed at the following timing.

(1) When a job such as print or scan is completed or suspended.

Delete the temporary document or its parts which is generated during job execution.

- When the deleting operation is performing.Delete the specified document.
- (3) When the residual information exists at the time of turning on the power. When the power is turned off during deletion of (1) or (2) and the deletion was not completed with the residual information, this deletes them at the time of the power ON.

U.ADMINISTRATOR sets the overwriting data and the frequency of overwriting, by the operation setting function of the HDD data overwrite deletion function. The possible settings and its details are as follows.

Setting	Contents (Overwritten data type and its order)
Mode:1	Overwrite once with 0x00
Mode:2	Overwrite with 0x00, 0xFF, 0x61 in this order and Verify the result.

Table 7-6 Operation Settings of Overwrite Deletion function of Temporary data

7.5.2 Data Complete Deletion Function

- Corresponding functional requirements: FDP_RIP.1, FDP_ACF.1(a)

U.ADMINISTRATOR can perform overwriting and deleting to the data area including image data in HDD. This deletes document in HDD and prevents to reuse the residual information. U.ADMINISTRATOR sets the overwriting data and the frequency of overwriting, by the operation setting function of the HDD data overwrite deletion function. The possible settings and its details are as follows.

Table 1 1 Operation settings of Data Complete Deletion Function			
Method	Overwritten data type and their order		
Mode:1	0x00		
Mode:2	Random numbers \Rightarrow Random numbers \Rightarrow 0x00		
Mode:3	$0x00 \Rightarrow 0xFF \Rightarrow Random numbers \Rightarrow Verification$		
Mode:4	Random numbers $\Rightarrow 0x00 \Rightarrow 0xFF$		
Mode:5	$0x00 \Rightarrow 0xFF \Rightarrow 0x00 \Rightarrow 0xFF$		
Mode:6	$0x00 \Rightarrow 0xFF \Rightarrow 0x00 \Rightarrow 0xFF \Rightarrow 0x00 \Rightarrow 0xFF \Rightarrow Random numbers$		
Mode:7	$0x00 \Rightarrow 0xFF \Rightarrow 0x00 \Rightarrow 0xFF \Rightarrow 0x00 \Rightarrow 0xFF \Rightarrow 0xAA$		
Mode:8	$0x00 \Rightarrow 0xFF \Rightarrow 0x00 \Rightarrow 0xFF \Rightarrow 0x00 \Rightarrow 0xFF \Rightarrow 0xAA \Rightarrow Verification$		

Table 7-7 Operation settings of Data Complete Deletion Function

7.6 F.I&A (Identification and authentication function)

- Corresponding functional requirements: FIA_AFL.1, FIA_ATD.1, FIA_SOS.1(1), FIA_UAU.1, FIA_UAU.6, FIA_UAU.7, FIA_UID.1, FIA_USB.1, FTA_SSL.3

The TOE verifies that person who tries to use the TOE is the authorized user by using the identification and authentication function obtained from the user, and permits the use of the TOE only to the person who was determined as the authorized user. Identification and authentication function has the machine authentication method that the TOE itself identifies and authenticates, and the external server authentication method that uses external authentication server.

Authentication	Possible operations	SFR
method	before success of identification and authentication	SFR
	Confirmation of suspension state of User use	
Machine Authentication	Confirmation of suspension state of Account use	FIA_UID.1
External Server Authentication	FAX RX	FIA_UAU.1
	Confirmation of TOE State and Setting of display, etc.	

Table 7-8 Authentication method

* The setting of authentication method is performed by U.ADMINISTRATOR. Both Machine authentication and External sever authentication are activated at the same time. When both of them are activated, U.ADMINISTRATOR sets which methods are used for each user. User, who U.ADMINISTRATOR sets both authentication methods available, selects by oneself at the time of authentication.

The TOE also displays "*" for input password. FIA_UAU.7 This requires re-authentication when login password is changed. FIA_UAU.6

When identification and authentication are successful, User ID, Group ID and Allocation Role are combined to the process that acts as the appropriate user. FIA_ATD.1, FIA_USB.1

Moreover, the TOE prevents from setting the low strength password by restricting for satisfying the following qualities in the passwords used for authentication.

Objective	Condition	SFR
Login	The TOE accepts only the password that satisfies the following.	FIA_SOS.1(1)
Password	-Number of characters : 8 or more characters	
	-Character type : possible to choose from 94 or more characters	
Account	-Rule: (1) Do not compose by only one and the same character.	
Password	(2) Do not set the same password as the current setting after	
	change.	

When the authentication failed, the TOE performs the following process.

Objective	Process	SFR
Authentication	Authentication is suspended when number of continuous	FIA_AFL.1
failure by login	authentication failure reached the value that U.ADMINISTRATOR	
password	set.	
	Authentication is also suspended even if the number of continuous	
	authentication failure exceeds the setting value because of the change	
	of setting value by U.ADMINISTRATOR.	
	When the authentication of administrator is suspended, it is released	
	by performing boot process of the TOE and passing the time set in the	
	release time setting of operation prohibition for administrator	
	authentication from boot process.	
	In other cases, it is released by performing deletion function of number	
	of authentication failure by administrator.	

 Table 7-10 Process at the time of authentication failure

When the identified and authenticated user does not operate for a certain period of time, the session is terminated. The details are as follows. FTA_SSL.3

Objective	Session termination	Others
Operation panel	When it passes for the	Auto reset time is set in the factory
	time determined by auto	and administrator can change it.
	reset time, after	
	processing of last	

Table 7-11 Termination of interactive session

	operation was completed.	
Web Connection	When it passes for the	Auto reset time is set in the factory
	time determined by auto	and administrator can change it.
	logout time, after	
	processing of last	
	operation was completed.	
Data Administrator	When it passes for 60	Time is fixed
	minutes, after processing	
	of last operation was	
	completed.*	
Printer driver		There is no interactive session since
Fax		accept of the request is the start and
		the completion of process is end.
		Identification and authentication is
		performed in each acceptance
		except Fax RX.

*This is the time considered the process that takes time such as downloading the registered information.

7.7 F.SEPARATE_EX_INTERFACE (External interface separation function)

- Corresponding functional requirement: FPT_FDI_EXP.1

The TOE prevents the access from telephone line by limiting the input information from telephone line only to FAX RX and Remote Access function, and prohibits the direct transfer of received fax. Moreover, it is a structure which cannot be transfer the input from external interface including USB interface to Shared-medium Interface as it is.

7.8 F.SELF_TEST (Self-test function)

- Corresponding functional requirement: FPT_TST.1

The TOE contains the data for verification and decrypts it by using encryption passphrase when the power is ON. This verifies the integrity of encryption passphrase by confirming that the data for verification was decrypted correctly. And then, this provides HDD encryption function and the function to verify the normal operation of TSF executable code. Moreover, the TOE verifies the integrity of TSF executable code by calculating hash value of control software when the power is ON and checking whether it corresponds to the recorded value or not. If the loss of completeness was detected in the integrity verification of encryption passphrase and control software, the TOE displays the alert on the operation panel and does not accept the operation.

7.9 F.MANAGE (Security management function)

Corresponding functional requirements: FIA_SOS.1(1), FMT_MOF.1, FMT_MSA.1(a),
 FMT_MSA.1(b), FMT_MSA.3(a), FMT_MSA.3(b), FMT_MTD.1, FMT_SMF.1, FMT_SMR.1
 The TOE provides the following management functions.

Management function	Contents	Operator
Management function of	Enable or disable Enhanced Security	U.ADMINISTRATOR
Enhanced Security	settings	0.ADMINIOTRATOR
settings	settings	
Management function of	Performs the setting of authentication	U.ADMINISTRATOR
User Authentication	method.	0.ADMINISTRATOR
function	method.	
Operation setting function	Performs the operation setting of HDD	U.ADMINISTRATOR
of HDD data overwrite	data overwrite deletion function. (Setting	0.ADMINISTRATOR
deletion function	of Mode)	
Audit log management	Performs the operation setting when the	U.ADMINISTRATOR
function	audit log is full (Restriction of overwriting	0.ADMINISTRATOR
runction	/ Permission of overwriting). Read audit	
	log and delete.	
Trust Channel	Communication Encryption Strength	U.ADMINISTRATOR
Management Function	Setting (Change of communication	
	encryption method)	
User management	Registration and deletion of user to the	U.ADMINISTRATOR
function	TOE. Registration, modification and	
	deletion of attributes (Group ID,	
	Authority)	
	When user was deleted, it selects whether	
	personal user box which that user holds is	
	changed to public user box or deleted.	
Temporary suspension/	Suspends temporarily the use of User ID	U.ADMINISTRATOR
Release function of User	and Group ID, and Release.	
ID and Account ID		
Initialization of attributes	The TOE initializes the security	None
	attributes of D.DOC and D.FUNC in	
	accordance with Table 6 15. This	
	initialization is performed at the	
	generation of these objects and there is no	
	function to interfere with this initializing	
	process.	
	The TOE also initializes the attributes of	
	F.PRT, F.SCN, F.CPY, F.FAX and F.DSR	
	in accordance with Table 6 16. This	
	initialization is performed at the	
	generation of these objects and there is no	
	function to interfere with this initializing	
	process.	

Table 7-12 Management Function

Registration function of	Register login password of U.NORMAL.	U.ADMINISTRATOR
U.NORMAL's login	Register login password of U.NORMAL.	U.ADMINISTRATOR
password		
Modification function of	Change login password of U.NORMAL	U.ADMINISTRATOR
U.NORMAL's login	Change login password of C.ivoluliAL	0.ADMINISTRATOR
password		
Modification function of	Change own password.	U.NORMAL
U.NORMAL's login	Change own password.	0.NORMAL
password	Register / change the Account password.	U.ADMINISTRATOR
Registration/		
Modification function of		
Account password		
Modification function of	U.ADMINISTRATOR changes own	U.ADMINISTRATOR
U.ADMINISTRATOR	password. (There is no setting function	U.ADMINISTRATOR
	•	
login password	since initial value is set at factory default.)	
Sotting / Modification	Set or change the encryption passphrase	U.ADMINISTRATOR
Setting / Modification function of encryption	Set or change the encryption passphrase which is basic data for encryption key	U.ADMINISTRATUR
passphrase	used for HDD encryption function.	
Modification function of	Set the date and time information	
Time information	Set the date and time information	U.ADMINISTRATOR
Modification function of	Channe the Automatic (There is no	U.ADMINISTRATOR
	Change the Auto reset time. (There is no	U.ADMINISTRATOR
Auto reset time	setting function since initial value is set	
	at factory default.)	
Modification function of	Change the Auto logout time. (There is no	U.ADMINISTRATOR
Auto logout time	setting function since initial value is set	
	as factory default.)	
Modification function of	Change the threshold of the number of	U.ADMINISTRATOR
Authentication failure	authentication failure. (There is no	
frequency threshold	setting function since 3 is set as the	
	initial value.)	
Registration / Modification	Register and change the setting data for	U.ADMINISTRATOR
function of External	the external authentication server	
server authentication	(including the domain name that external	
setting data	server belongs to)	
Modification function of	Change the release time from prohibiting	U.ADMINISTRATOR
Release time of operation	operation for Administrator	
prohibition for	authentication. (There is no setting	
Administrator	function since initial value (5 minutes) is	
authentication	set at factory default.)	
Registration /	Register and change and delete the	U.ADMINISTRATOR
Modification/ Deletion	Account. When account was deleted, it	
function of Account	selects whether group user box which	
	that account holds is changed to public	
	user box or deleted.	

Registration function of	U.ADMINISTRATOR registers	U.NORMAL
Belonging Account of	U.NORMAL's own belonging account	U.NORMAL
U.NORMAL's own	after the authentication success with	
0.NORMALS OWN	correct account ID and account password	
	when U.NORMAL who does not have	
	registered belonging account, logs in first	
Deviator d'a col	from the panel.	U.ADMINISTRATOR
Registration /	Register and change Account name	U.ADMINISTRATOR
Modification function of	(Group ID) of U.NORMAL.	
Belonging Account of		
U.NORMAL		
Deletion function of	Delete the number of password	U.ADMINISTRATOR
Password mismatch	mismatch. Accordingly, access prohibition	
frequency	of the user box is canceled	
Modification function of	Change the threshold of the number of	U.ADMINISTRATOR
Password mismatch	password mismatch. (There is no setting	
frequency threshold	function since 3 is set as the initial value.)	
Deletion function of	Delete the number of authentication	U.ADMINISTRATOR
Authentication failure	failure (except administrator).	
frequency (except	Accordingly, the lock of authentication	
administrator)	function is canceled.	
Modification function of	Set and change Password policy.	U.ADMINISTRATOR
Password policy		
Registration / Modification	Set and change the network settings (IP	U.ADMINISTRATOR
function of Network	address / port No. of SMTP sever / DNS	
setting	server, MFP IP address, NetBIOS name,	
	AppleTalk printer name, etc.)	
Registration / Modification	Register and change the transmission	U.ADMINISTRATOR
function of transmission	address setting (address of e-mail	
address	transmission, etc.)	
Modification function of	Perform the settings about forwarding RX	U.ADMINISTRATOR
Settings for forwarding	FAX.	
RX Fax		
Management function of	Change and delete the object security	U.NORMAL
Object security attributes	attributes (except User ID, Box Type,	
(except User ID, Box Type,	DOC PASSWORD, Permission Role).	
DOC PASSWORD,		
Permission Role)		
Management function of	Change and delete the object security	U.ADMINISTRATOR
Object security attributes	attributes (except User ID, Box Type,	
(except User ID, Box Type,	DOC PASSWORD).	
DOC PASSWORD)		
Management function of	Change and delete the subject security	U.ADMINISTRATOR
Subject security attributes	attributes (object of management by user	
(except object of	management function, User ID,	
management by user	Temporary suspension and release of	
management by user	remporary suspension and release of	

management function,	account ID, BOX PASSWORD, DOC	
User ID, Temporary	PASSWORD)	
suspension and release of		
account ID, BOX		
PASSWORD, DOC		
PASSWORD)		

The management of Object security attribute is the deletion of object and the movement between the user boxes. If object is deleted, the attribute that is given to that object is also deleted. About the movement, for example the movement from the personal user box to the group user box changes Box Type and the attribute into Box Group ID from Box User ID. The access to the object in the user box and the save (create) to the destination depends on "7.3 F.ACCESS_DOC (Accumulated documents access control function." Movement can be executed only between the accumulated user boxes.

Note that the operations of BOX PASSWORD and DOC PASSWORD that are the subject security attributes, and the operations of User ID, Box Type, and DOC PASSWORD that are the object security attributes, are not available.

Management function	Contents	
Secure print password	The TOE accepts password only which satisfies the following as secure print	
management function	password.	
	Number of characters: 8 or more characters	
	Character type: possible to choose from 94 or more characters	
	Rule: Do not compose by only one and same character.	

Table 7-13	Secure Print Password	management function
	Decure I IIII I assword	management function

Management function	Contents		
User box password	The TOE accepts password only which satisfies the following as user box		
management function	password.		
	Number of characters: 8 or more characters		
	Character type: possible to choose from 94 or more characters		
	Rule: Do not compose by only one and same character.		

Table 7-14 User Box Password management function

7.10 F.SECURE_LAN (Network communication protection function)

- Corresponding functional requirement: FTP_ITC.1

The TOE performs encryption communication in communications with IT devices. Encryption communication provided by the TOE is as follows. (When the Enhanced Security Setting is valid.)

Destination	Protocol	Encryption algorithm	
Client PC	TLSv1.0,TLSv1.1,TLSv1.2	3DES(168 bits), AES(128bits, 256bits)	
	IPSec	3DES(168 bits), AES(128bits, 256bits)	
External authentication server	Kerberos v5	3DES(168 bits), AES(128bits, 256bits)	
DNS server	IPSec	3DES(168 bits), AES(128bits, 256bits)	
SMTP server	IPSec	3DES(168 bits), AES(128bits, 256bits)	

Table 7-15 Encryption Communication provided by the TOE

---End----